



Model: AZIP2MS-MAIC



DESCRIPTION:

AZSecu introduces a new generation of network IP camera; the AZIP2MS-MAIC. Incorporating with advanced Sony progressive scan CMOS, they provide extremely clear and details images for surveillance monitoring application.

Unlike the conventional network cameras that incorporate progressive scan CMOS with primary colour filters, AZIP2MS-MAIC produces amazing high-resolution images even at very low light environment.

FEATURES:

- 1/2.8" Sony IMX290 Starvis CMOS image sensor for excellent image quality at extremely low lux
- Supports image resolution up to 1920 x 1080P @30fps
- 2D & 3D noise reduction
- 2.8-12mm motorized lens, auto-focus
- Triple stream
- Support P2P cloud monitoring
- On-board Micro SD Card Slot (max 128G card supported)
- 1 Alarm in&1 Alarm Out; 1 audio in&1 audio out port for two-way talk
- POE supported
- ONVIF supported

Ordering Information

Model No	AZIP2MS-MAIC
Dimension (LxHxW)	288 x 89 x 110 mm
Weight	1200g
Product Box Size (mm)	283 x 115 x 93mm
Carton Size; Qty/CTN	578*330*360mm; 12pcs/ctn

Precaution

- Do not install camera in with temperature above 50°C or under -10°C.
- Do not install in a places with high humidity
- Do not face the camera to a strong light
- Do not drop the camera and avoid physical shock.
- Its highly important to use the correct and suitable power supply (DC12V) or POE injector for the camera.
- Only Professional and qualified technician can install and test the camera

MODEL	AZIP2MS-MAIC
CAMERA	
Image Sensor	1/2.8" Sony IMX290 CMOS
Effective Pixels	2001(H) × 1121(V), 2MP
Resolutions	2MP (1920 × 1080 @ 30fps)
Electronic Shutter Speed	1/5s ~ 1/50,000 sec
Signal To Noise Ratio	More than 50dB
Minimum Illumination	0.002Lux / F1.2 (Color, Starlight); 0Lux / F1.2 (IR ON)
Lens	2.8-12mm Motorized lens
IR LED Type	4pcs x Array LED
IR Distance	40M
ICR	Auto, Dual IR cut filter
WDR	120dB
Video Compression	H.265(main profile) / H.264(baseline main profile high profile) / MJPEG
Encoding	Triple-stream: Main stream: 1920 x 1080 25fps Sub stream1: 1280 x 720 25fps Sub Stream2: 704 x 576 25fps
Encoding Type	Constant bit rate, Variable bit rate optional
Video Bit Rate	200Kbps-12Mbps
Motion Detection	Can set a single detection zone, multi-level sensitivity can be set
Video Mask	Support 4 areas to mask
Screen Capture	Support JPEG format max resolution based on encoding resolution
Character Display	Supported (Channel name, Date, Multiple lines OSD)
Alarm Function	Video loss, Network disconnect, Tampering alarm, Storage exception
Protocol	IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, P2P
Compatibility	Linux/windows C/C++ SDK / ONVIF v2.42 / CGI API
Max User Access	10 users
Smart Phone	Iphone, Ipad, Android
Network Interface	RJ45 10/100 Base-T
ADDITIONAL	
Audio Input	1 Audio In/1 Audio Out, 2 way Audio
Alarm Input	1 Alarm In/1 Alarm Out
GENERAL	
Power Source	DC12V & POE (IEEE802.3af)
Power Consumption	Max. 13.6W (12V DC)
Net Weight	1200g
Dimension (L x W x H) mm	288 x 89 x 110 mm
IP Rating	IP66
Body Material / Vandalproof Rating	Alloy / -
Operating Temperature	-10°C ~ +55°C / > 90% RH
Storage Temperature	-40°C ~ +60°C / > 95% RH


Specifications subject to change without notice. © 2018.All rights reserved.

Optional Accessories



JB69 Junction Box

STRUCTURE:

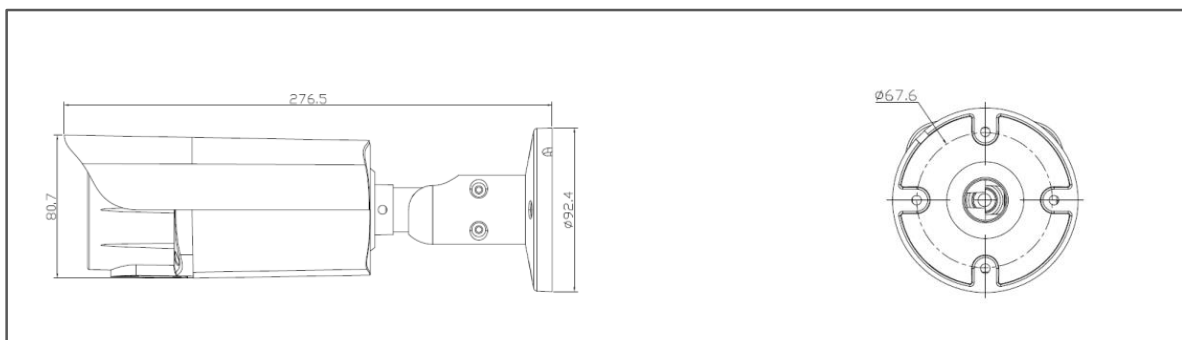

INTERFACE:

