



**Model:AZUVIC-300**

#### FEATURES:

- Camera: 2 sets of 5MP cameras
- Cam 1: 5.0MP 16pcs LED camera with universal wheel and 1.88m telescopic pole
- Cam 2: 5.0 MP 6pcs LED camera Ø19.5mm with 2.4m flexible telescopic pole
- Night vision: 16 pcs Led(cam1) / 6 pcs Led(cam2)
- Camera resolution: 5.0 MP 3200\*1800 pixels
- Telescopic Pole: 1.88m
- Metal monitor bracket: adjustable
- Monitor: 7-inch HD screen with sun visor
- Video Recording Resolution: Full HD 1920\* 1080
- Video Compression Format: H.264
- Photo Snapshot: JPG 5.0Mega 3200(H)×1800(V)
- Battery: Built-in 5500mAh high capacity Li-battery.
- Working Time: 5-8 hours
- Storage: Supports up to 64GB TF card.
- Language: Supports multi-language.
- Supports Power-saving Mode: automatic shutdown, automatic off-screen.
- Automatic upgrade: Supports system automatic upgrade.
- Video Output: HDMI, AV-OUT
- Equipped Aluminum Alloy casing

#### Ordering Information

Model No	AZUVIC-300
Dimension (LxHxW)	
Gross Weight	
Product Box Size (mm)	
Carton Size; Qty/CTN	


#### Precaution

- Forbid to use it in high temperature, high humidity environment.
- Please insert or pull out the TF card after monitor is powered off. If under working state, the huge current will bring unpredictable damage to the machine.
- DO NOT use this product to violate others' privacy. Monitoring others' activities without consent is illegal and this product is not designed and manufactured for such purpose.

MODEL	AZUVIC-300
<b>Inspection Camera with Wheel</b>	
Image Sensor	1 /2.5" 5MP SONY Image Sensor
Light source	16 pcs LED lamps
Sensitivity	0.08Lux / F1.2
Lens & View angle	3.6mm F1.2 (H )120 °
Video Output	HD-TVI
Data cable	Diameter:4.0mm Length:3m
Dimension	37 x 46 mm
Wheels on the tray	Omni-directional wheel
Telescopic pole length	Constriction Length:58cm; Extended Length:188cm
<b>Flexible Pole Camera</b>	
Optical Element	1/3" 5MP CMOS Sensor
Optical Total Pixels	5.0Mega:3200(H)x1800(V)
CMOS Sensor Size	5.07mm(H)x3.38mm(V)
Light Source	6pcs LED lamps
Sensitivity	0.2Lux/F1.2
Lens & View Angle	0.5mm F1.2 120°
Video Output	HD-TVI
Dimension & Weight	18x28mm, 10g
Cable	Diameter: 4mm Length:3meters
Flexible Pipe Length	25cm soft metal pipe
Telescopic Pole Length	Constriction Length:63cm; Unfolded Length:240cm
<b>7 Inch Monitor with Recording</b>	
HD Video Output	HDMI: 1920*1080; 1280*720
Video Storage Pixels(16:9)	Full HD 1920*1080; 1280*720
Video Compression Format	H.264
Video Compress	AVI
HD Digital Video Input Interface	FPD-Link III
Photo Format	JPG 5.0MP:3200(H)x1800(V)
Storage External SD Card	TF Card max 64GB
Operating System	Windows & Mac OS
Port	Standard AV-OUT, USB2.0
Language	Multiple
Current & Voltage	700mA Video mode; 600mA Monitor mode/DC 12V 2A
Built-in Battery	Rechargeable Li-battery 5500 mAh
Standby Time	≥8 hours
DVR Size & Weight	177mmx120mmx20mm/350g

Specifications subject to change without notice. © 2019.All rights reserved.

## PACKAGE INCLUDED

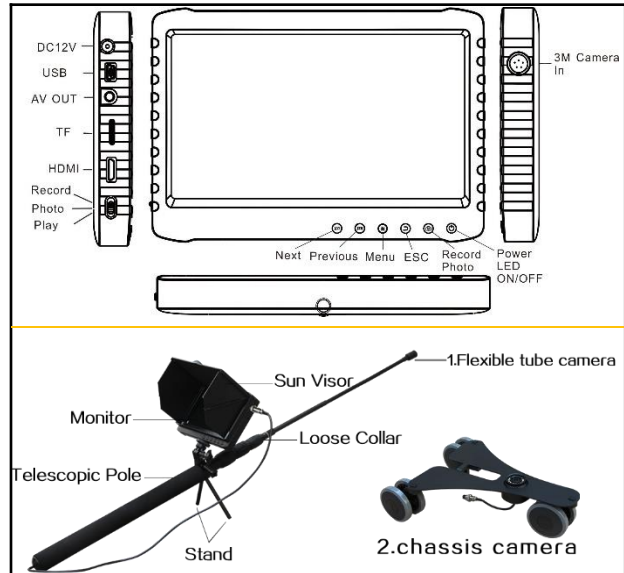

- ✓ 1\* 7 inch Digital DVR with sunshade;
- ✓ 1\* Wheel tray camera
- ✓ 1\* Mini flexible tube camera
- ✓ 1\* 2m telescopic pole
- ✓ 1\* USB data cable
- ✓ 1\* AC adapter
- ✓ 1\* HDMI Data Cable
- ✓ 1\* Aluminum alloy Case