



ALARM CABLE 0.22MM (BC)

APPLICATION


- ❖ These cables are designed for signaling and alarm systems.
- ❖ They allow the connection of contacts, detectors and sensors, infra-red as well as microwave or mixed technology systems to the switchboard

PRODUCT FACTS

- ❖ Soldering for INDOOR USE

PRODUCT CODE

- ❖ ALA-ALL-4022-BC

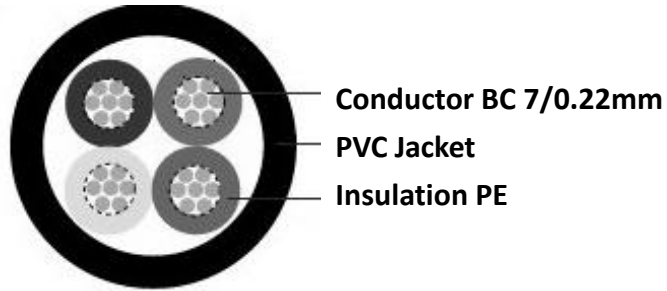

TECHNICAL DATA

DESCRIPTION	SPECIFICATION
<i>Physical Characteristics</i>	
Number of Cores	4
Stranding	7/0.22 mm
Conductor Overall Diameter	1.1 mm
Conductor Material	Bare Copper
Thickness of Insulation	0.25mm
Insulation Material	PE
Insulation colour	White,Orange,Green,Black
Shield Aluminum Foil	None
Thickness of Jacket	0.60mm
Jacket Material	PVC
Jacket colour	White
Jacket Overall Diameter	4.0+/-0.2mm
Nominal Overall Diameter	4.0+/-0.2mm
Length	100 m/roll
Cable Weight (kg)	2.00
Maximum Operating Temperature (121°C)	Not showing any cracks
Maximum Conductor Resistance	Under 152.21 ohm /KM at 25°C
<i>Electrical Characteristics</i>	
Maximum Operating Voltage (V AC)	300V