



# RG6 1229A COAXIAL CABLE

## APPLICATION


- ❖ High quality RG Type Coaxial cable, 3GHz 75 Ohm suitable for many applications, particularly broadcast and MATV/CATV installations.

## PRODUCT FACTS

- ❖ INDOOR USE
- ❖ Suitable for shop-lot, home, factory

## PRODUCT CODE

- ❖ RG6-XPRO-1229A-300M

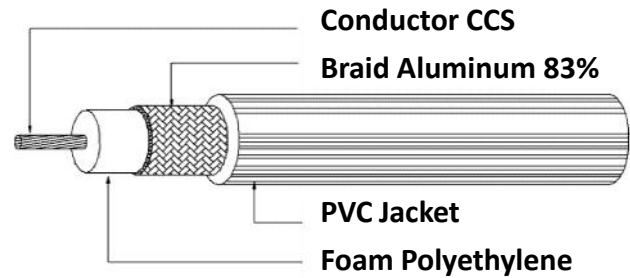

## TECHNICAL DATA

ITEM		UNIT	SPEC. VALUE
Inner Conductor	Material	---	Copper clad Steel
	Dia.(approx)	mm	1.00 ± 0.15
Insulation	Material	---	Foam Polyethylene
	Nom. Thickness	mm	1.56 ± 0.18
	Dia.(approx)	mm	4.80 ± 0.18
	Colour	---	Natural
Outer Conductor	Type	---	Braid
	Material	---	Aluminum
	Coverage	%	83 ± 3
	Dia.(approx)	mm	0.16 x 64
Jacket	Material	---	PVC
	Nom. Thickness	mm	0.80 ± 0.2
	Colour	---	White
	Dia.(approx)	mm	7.00 ± 0.20
CHARACTERISTICS			
DC Conductor Resistance at 20°C			< 26.1Ω/100m
Insulation Resistance at 20°C			> 200 MΩ.m
Nominal Velocity of Propagation			66.6 ± 3%
Capacitance			67 ± 5 pF/m
Characteristic Impedance at 20°C, 200MHz			75 ± 5Ω
PACKING			
Wooden drum - 340x340x240(mm)	300m/drum		17.kg