



CATEGORY 3 SOLUTIONS

APPLICATION


- ❖ XPRO2-Pair Category 3 copper cables lay the solid platform needed for a reliable 10/100 Mb.

PRODUCT FACTS

- ❖ INDOOR USE
- ❖ TWISTED PAIR

PRODUCT CODE

- ❖ TEL-XPRO-063-250-BC

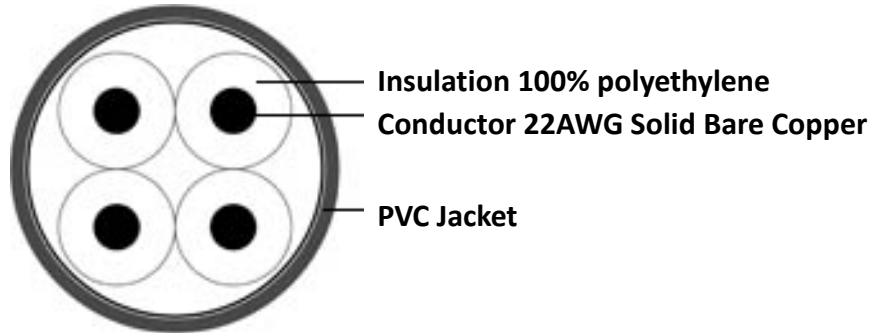

TECHNICAL DATA

DESCRIPTION	SPECIFICATION
<i>Physical Characteristics</i>	
Conductor Material	22 AWG BC x 2pair
Insulation Material	100% Polyethylene
Jacket Material	PVC
Minimum Bend Radius (Install)	25mm
Pull Tension	108N (11kg)
<i>Electrical Characteristics</i>	
Conductor DC resistance @ 20 °C (max)	9.38 Ω/100m
DC Resistance Unbalance (max)	5%
Mutual Capacitance @ 20 °C (max)	5.6nF/100m
Operating Voltage (max)	300VDC
Worst Case Cable Screw	45ns/100m
Nominal Velocity of Propagation	70%
Maximum Operating Temperature (°C)	70