



## Quick Guide

GS8

2/4CH Remote Control

SAW / SUPER-HET 433


( English )

ADAM@UNI: This guide is subject to change without notice

ADAM@UNI: 這份文件將會持續更新，恕不另行通知。

## · Remote Control System (2CH): RX and R/C

★ BOTH TRANSMITTER AND RECEIVER ADOPT SAW / CRYSTAL TECH TO ENSURE PROMISING RANGE AND AVOID OF FREQUENCY BIAS ★ **For better performance, fit the ANT (wire) as straight as possible!**

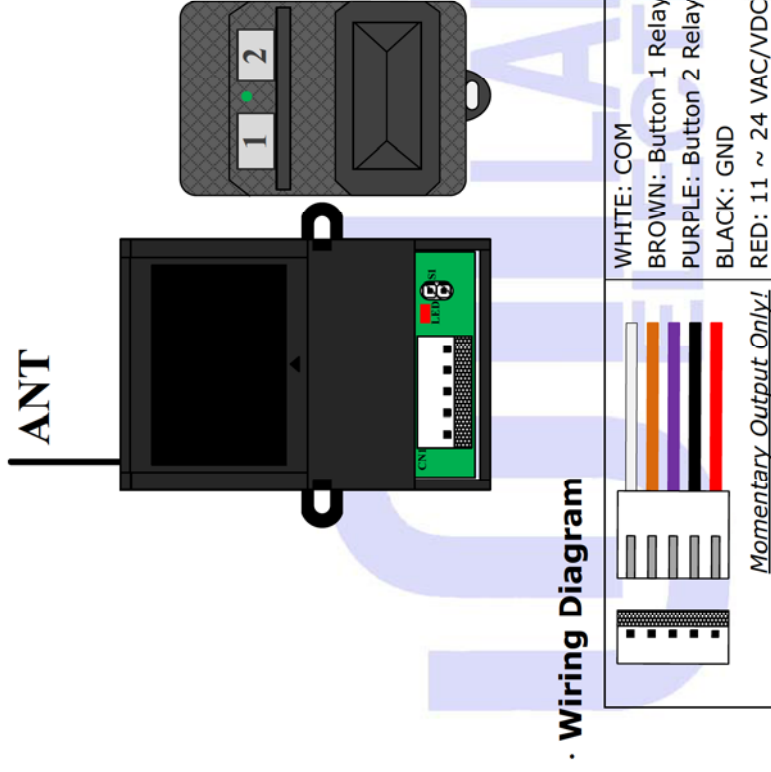


## · Learning Remote Control (R/C) in RX

1. Remove RIGHT jumper and wait until LED starts fast blinking.
2. Insert RIGHT jumper back and wait until LED stays on.
3. Press any button of R/C until LED starts fast blinking
4. Done and Ready!
5. The 2<sup>nd</sup> R/C with the same address code, will be workable, immediately.

## · Remote Control System (2CH): RX and R/C

★ BOTH TRANSMITTER AND RECEIVER ADOPT SAW / CRYSTAL TECH TO ENSURE PROMISING RANGE AND AVOID OF FREQUENCY BIAS ★ **For better performance, fit the ANT (wire) as straight as possible!**

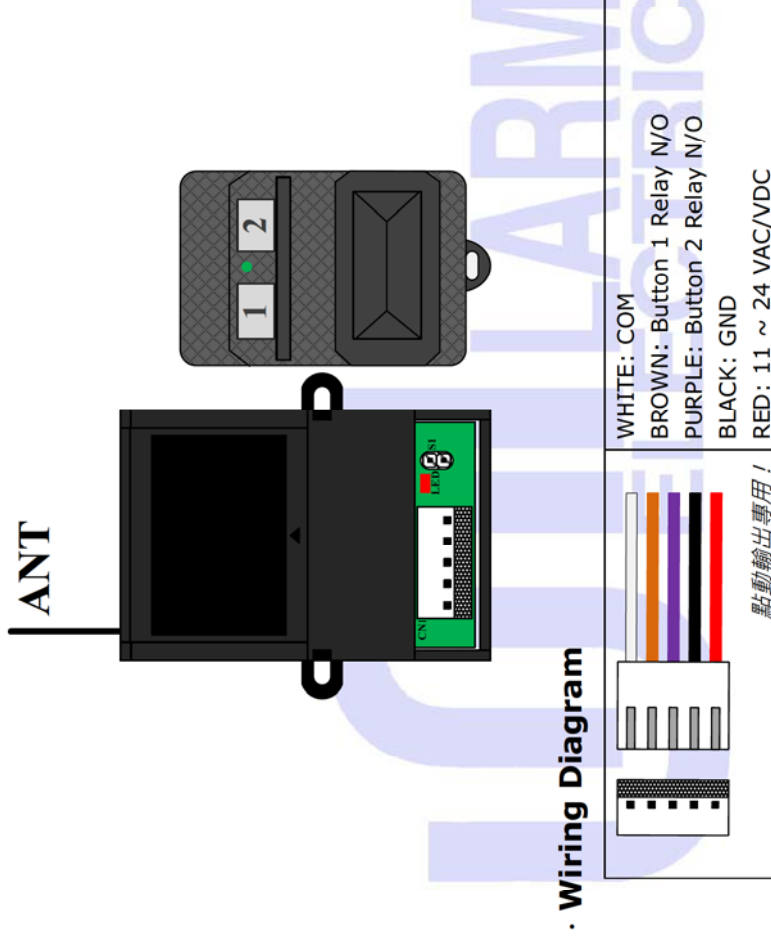


## · Learning Remote Control (R/C) in RX


1. 拔除右跳線帽且等待至 LED 燈開始快閃。
2. 插回右跳線帽且等待至 LED 燈恆亮。
3. 此時，按下遙控器任一鍵直到 LED 燈快閃。
4. 設定完成。
5. 第二組遙控器的指撥開關若是與第一組所設定的一樣，則立即可以工作。

## · Remote Control System (4CH): RX and R/C

★ BOTH TRANSMITTER AND RECEIVER ADOPT SAW / CRYSTAL TECH TO ENSURE PROMISING RANGE AND AVOID OF FREQUENCY BIAS ★ **For better performance, fit the ANT (wire) as straight as possible!**

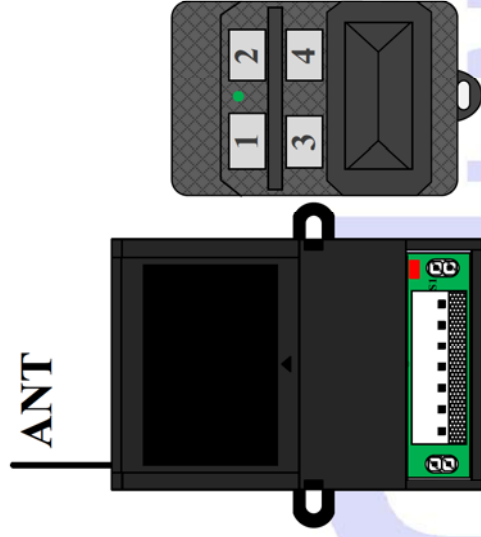

### · Wiring Diagram

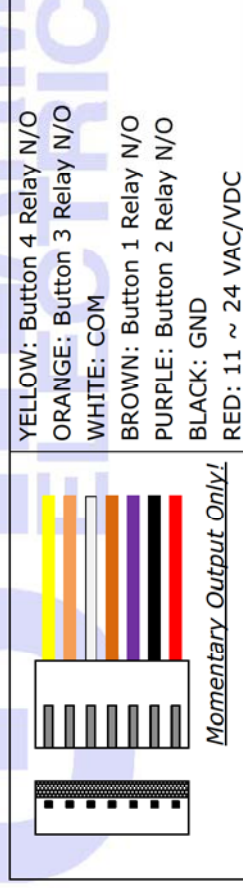


### · Learning Remote Control (R/C) in RX


1. Remove RIGHT jumper and wait until LED starts fast blinking.
2. Insert RIGHT jumper back and wait until LED stays on.
3. Press any button of R/C until LED starts fast blinking
4. Done and Ready!
5. The 2<sup>nd</sup> R/C with the same address code, will be workable, immediately.

## · Remote Control System (4CH): RX and R/C

★ BOTH TRANSMITTER AND RECEIVER ADOPT SAW / CRYSTAL TECH TO ENSURE PROMISING RANGE AND AVOID OF FREQUENCY BIAS ★ **For better performance, fit the ANT (wire) as straight as possible!**

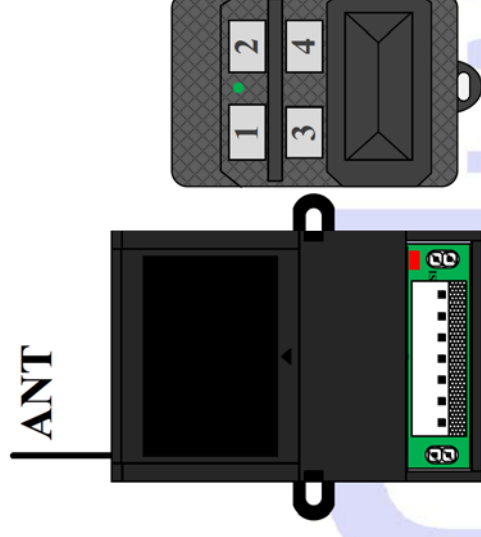

### · Wiring Diagram

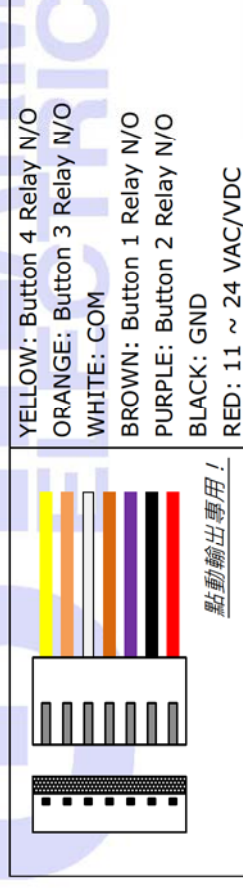

### · Learning Remote Control (R/C) in RX

1. 拔除右跳線帽且等待至 LED 燈開始快閃。
2. 插回右跳線帽且等待至 LED 燈恆亮。
3. 此時，按下遙控器任一鍵直到 LED 燈快閃。
4. 設定完成。
5. 第二組遙控器的指撥開關若是與第一組所設定的一樣，則立即可以工作。