


# Model SC-NVR1105

H.265 5CH 1HDD NVR

## Features

- S+265 Compression
- Up to 5MP Resolution Recording
- Support 5-ch Intelligent Analysis Process
- Smart Search&Recording, Plug&Play
- Support ANR Function
- Cloud upgrade
- Plug in free
- 1x HDMI, 1x VGA, Same Video Source, Max Resolution 1080p
- 1 SATA(Up to 8TB), 2x USB

## Dimensions

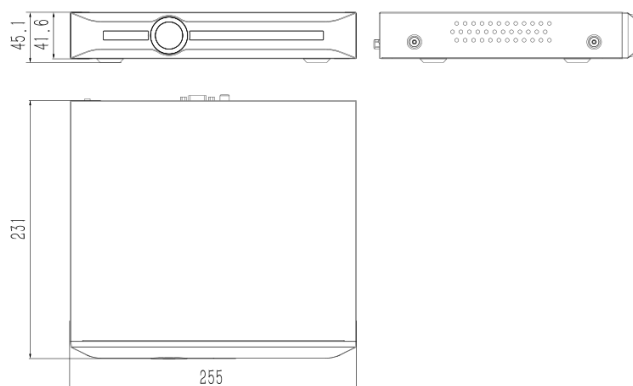

## Specification

<b>Video/Audio Input</b>	
Incoming Bandwidth	40Mbps
IP Video	5ch
Audio Input	N/A
<b>Video/Audio Output</b>	
Outgoing Bandwidth	40Mbps
HDMI	1920×1080, 1280×720, 800×600,1024×768, 1366×768,1440×900,1280×800
VGA	1920×1080, 1280×720, 800×600,1024×768, 1366×768,1440×900,1280×800 Adjustable Output mode, Self-adaptive Resolution
I-Frame Record	Y
Recording Resolution	5MP(2560*1920,2592*1944,2592*1920,2528*2128)/4MP(2560*1440,2592*1520) 3MP(2048*1536)/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Audio Output	N/A
Synchronous Playback	1-ch 5MP/2-ch 1080P/4-ch 720P
<b>Decoding</b>	
Compression	S+265/H.265/H.264H/H.264M/H.264B
Live View/Playback	5MP(2560*1920,2592*1944,2592*1920,2528*2128)/4MP(2560*1440,2592*1520) 3MP(2048*1536)/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Capability	1-ch 5MP/2-ch 1080P/4-ch 720P
Display Split	1/3/4/6
E-Zoom	Y

# Model SC-NVR1105

H.265 5CH 1HDD NVR

<b>Network</b>	
Remote Connection	16 Users, Up to 48ch Videos
Browser	Support all browsers, including IE, Safari, Chrome, Edge.
Mobile Software	P2P/DDNS/IP for IOS&Android (App Name: Easylive)
Protocol	TCP/UDP/HTTP/MULTICAST/UPnP/DHCP/PPPoE/DDNS/NFS/FTP/NTP/ HTTPS /RTSP/SMTP/HTTPS/SADP/TCP-IP/IPFILTER/ALARMSEVER/IP SEARCH
Email	Activated by Alarm
ANR	Y
Advanced	Remaining Bandwidth Display
<b>Hard Disk</b>	
SATA	1 SATA for 1HDD
E-SATA	N/A
Capacity	Up to 8TB
NTFS Files System	N/A
HDD Management	Group and Quota, Customized Recording Days
<b>External Interface</b>	
HDMI Output	1ch
VGA Output	1ch
Two-way Audio	N/A
Network Interface	1XRJ-45 10/100Mbps Self-adaptive Ethernet Interfaces
Serial Interface	N/A
USB Interface	2x USB2.0
Alarm In/Out	N/A
<b>Advanced</b>	
NAS	NFS Protocol, Support Manual Backup Only
Plug and Play	Y, Only for Tiandy Cameras
Image Flip	Y, Only for Tiandy Cameras
Hot Standby	N+1
Corridor Mode	Y, 16:9 to 9:16, Only for Tiandy Cameras
Video Analytics(VCA)	Camera VCA Function, including Tripwire/Perimeter/Facial Detection People Counting/Missing&Foreign Object/Crowd/Loitering/Fast Moving Parking/Off-position/Blurred Image/Audio Offline/Screaming Detection
Smart Search	Y
Trigger Recording	Manual/Timing/Motion Detection/Port Alarm/ VCA Alarm/Video Mask
Smart Recording	Set Recording Bite Rate for Different Time
Alarm Recording	Pre Alarm Default 10s (5/10/15/60s Optional) Post Alarm Default 10s (10/15/30/60/600s Optional )
One Key Control	Intercom, Recording
Records Format	SDV, Export MP4 in H.264 Format
Records Encryption	Y
Records Tag	Y
Onvif	Onvif(Profile S)
<b>General</b>	
Language	English,Simplified Chinese
Power Supply	DC12V 3.33A
Consumption(without HDD)	≤ 10W
Working Temperature	-10 °C ~ +55 °C (+14 °F~ + 131 °F)
Working Humidity	10 % ~ 90 %
Chassis	1U
Dimensions	45mm×255mm×231mm
Weight	0.8KG (without HDD), 1.4KG (with Packing Box)

