



Simple and Effective, The Ball Valve

5308/5309 Series Ball Valves

Concept

Ball valves are ideal for applications requiring a full flow body design to minimize line turbulence and pressure drop. An encapsulated seat option is available for critical process applications requiring maximum reduction of potential for product entrapment.

Standard Design

The Ball valve consists of a stainless steel body that houses a rotating ball. The rotating ball is sealed in the body with a PTFE seat that either partially or fully encapsulates the ball. The valve is activated by a stainless steel handle that opens and closes the valve through a quarter turn. The valve can also be operated by an optional ¼ turn pneumatic or electric actuator. External thrust springs maintain constant pressure on the stem packing. The stem and packing design eliminate the possibility of the stem becoming dislodged or blown out.



TECHNICAL DATA

Temperature

Temperature range: -20°C to 150°C (EPDM)

Pressure

Max. product pressure: 400 kPa (40 bar)

Min. product pressure: Full vacuum

PHYSICAL DATA

Materials

Valve body CF3M9 (316L)

Ball & Stem 1.4401 (316L)

Handle 1.4301 (304)

External surface finish Semi-bright (blasted)

Internal surface finish Bright (polished), Ra ≤ 0.5 μm

Product wetted seals PTFE

Actuator surface Epoxy coated

Options


Actuator Function

- A. Pneumatic actuator air to air
- B. Pneumatic actuator air to spring
- C. Reinforced PTFE
- D. Stainless Steel
- E. Actuator bracket, coupling and hardware
 - 1.4301 (304) stainless steel


Torque vs. Pressure

Standard Seats

1/2" (12.7mm) - 2" (50.8mm) Tube OD

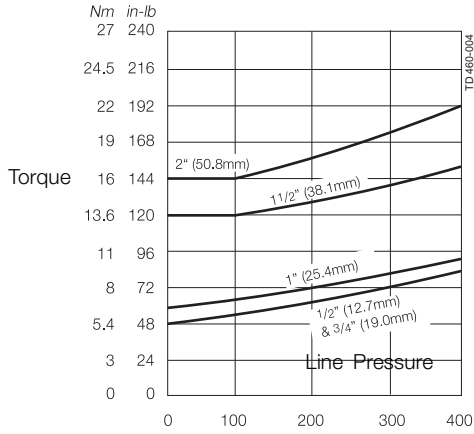


3" (76.2mm) - 4" (101.68mm) Tube OD

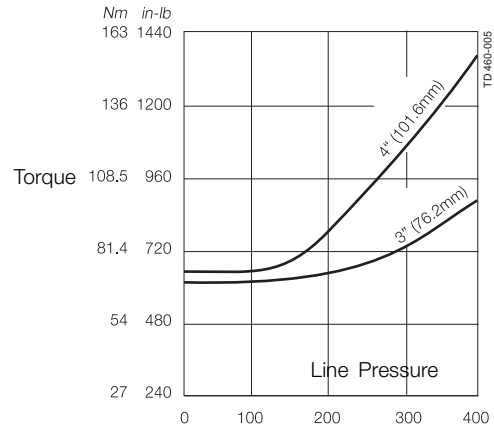


Encapsulated Seats

1/2" (12.7mm) - 2" (50.8mm) Tube OD

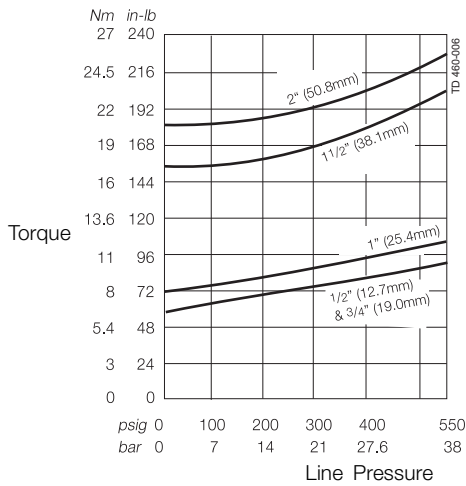


3" (76.2mm) - 4" (101.68mm) Tube OD

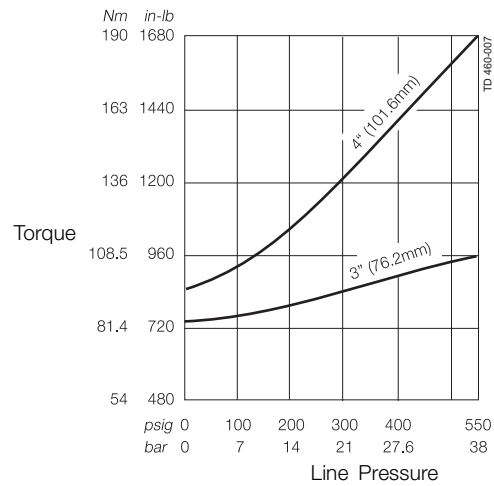


Use the charts above to determine the amount of torque required to cycle the ball valve.


Standard and Encapsulated Seats: Ratings - Pressure vs. Temperature

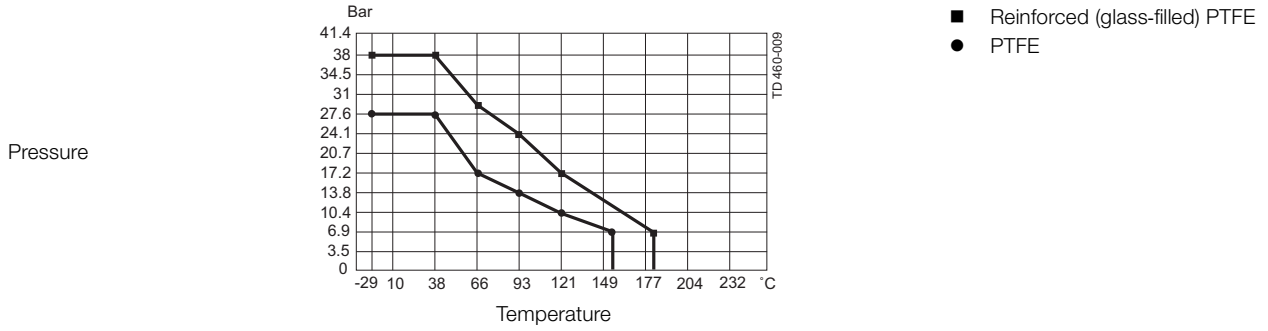


Manual Valve Dimensions

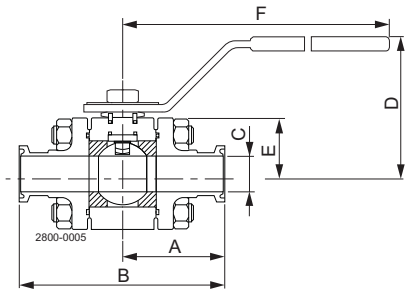

Tri-Clamp® Ends
 Model 5308
 Sizes 1/2" - 2"

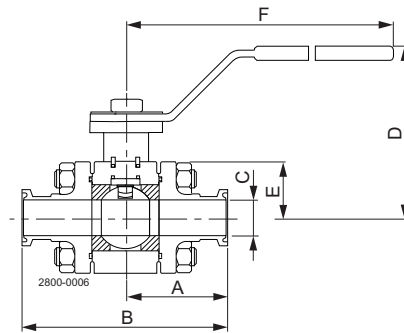

Tri-Clamp® Ends
 Model 5308
 Sizes 3" and 4"

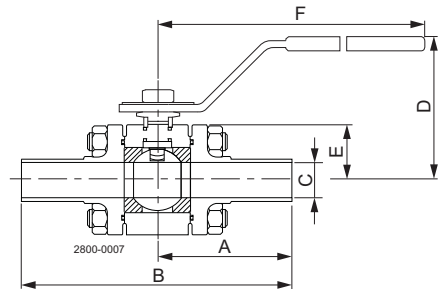

Butt-Weld Ends
 Model 5309

Model	Size		A		B		C		D		E		F		Weight (valve + handle)	
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lb	kg
5308 Tri-Clamp® (both ends)	1/2	12.7	1 3/4	44.5	3 1/2	88.9	3/8	9.5	2 5/16	58.7	1 9/64	29.0	5 1/4	134	2	0.9
	3/4	19.0	1 3/4	44.5	3 1/2	88.9	5/8	15.9	2 7/16	61.9	1 9/64	29.0	5 1/4	134	2	0.9
	1 1/2	25.4	1 3/4	44.5	3 1/2	88.9	27/32	21.4	2 5/16	58.7	1 19/64	33.0	5 1/4	134	3	1.4
	1	25.4	2 1/4	57.2	4 1/2	114.3	1 23/64	34.5	2 3/4	95.3	1 37/64	40.0	6 11/16	170	6	2.7
	2	50.8	2 1/2	63.5	5	127.0	1 56/64	47.2	4 1/8	104.8	2 3/16	55.5	8 9/64	207	10	4.5
	3	76.2	3 7/8	98.4	7 3/4	196.9	2 55/64	72.6	7	177.8	4 9/16	115.5	11 3/4	298.4	30	13.6
5309 Butt-Weld (both ends)	1/2	12.7	2 11/16	68.3	5 3/8	136.5	3/8	9.5	2 5/16	58.7	1 9/64	29.0	5 1/4	134.0	2	0.9
	3/4	19.0	2 13/16	71.4	5 5/8	142.9	5/8	15.9	2 7/16	61.9	1 9/64	29.0	5 1/4	134.0	2	0.9
	1	25.4	3 7/32	81.8	6 7/16	163.5	27/32	21.4	2 5/16	58.7	1 19/64	33.0	5 1/4	134.0	3	1.4
	1 1/2	38.1	3 5/8	92.1	7 1/4	184.2	1 23/64	34.5	3 3/4	95.3	1 37/64	40.0	6 11/16	170.0	6	2.7
	2	50.8	3 13/16	81.0	7 5/8	193.7	1 55/64	47.2	4 1/8	104.8	23/16	55.5	8 9/64	207.0	10	4.5
	3	76.2	3 1/2	89.1	8	203.2	1 1/2	38.1	5 1/4	134.0	3 1/4	82.5	10 1/4	260.0	15	6.8

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE00169EN 1201

© Alfa Laval

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com to access the information direct.