

POWER SUPPLY 12VDC 3A

PRODUCT FACTS

- Universal full range AC input power
- ❖ Built-in EMI filter, tiny ripple
- Protections short circuit/Overload/Over Voltage
- ❖ Cooling by free air convection
- ❖ 43,000 hours of continuous operating at 25°C
- ❖ 100% full load burn-in test

❖ Compliance to IEC/EN60335-1(PD3) and IEC/EN61558-1, 2-16 suitable for home appliance SPECIFICATION CEROHS



PS-12V3A





					ISO9001:2008	
	Model	S-35-5	S-35-12	S-35-15	S-35-24	S-35-48
	DC VOLTAGE	5V	12V	15V	24V	48V
ОИТРИТ	RATED CURRENT	7A	3A	2.3A	1.5A	0.73A
	CURRENT RANGE	0 ~ 7A	0~3A	0~2.3A	0 ~ 1.5A	0 ~ 0.73A
	RATED POWER	35W	36W	34.4W	36W	35W
	RIPPLE NOISE (Max)	50mVp-p	50mVp-p	80mVp-p	100mVp-p	100mVp-p
	VOLTAGE ADJ. RANGE	4.5 ~ 5.5V	10.8 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 26.4V	43.2 ~ 52.8V
	VOLTAGE TOLERANCE	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	200ms , 100ms				
	HOLD UP TIME (Typ.)	30ms (full load)				
	VOLTAGE RANGE	85 ~ 132VAC/170~264VAC by switch 240~370VDC				
	FREQUENCY RANGE	47 ~ 63Hz				
	EFFICIENCY (Typ.)	75%	80%	82%	82%	82%
	AC CURRENT (Typ.)	0.8A/115V				
	5.00 (MC100) M. 1 M. M. 1 M. 1	COLD START: 18A/115V 36A/230V				
	LEAKAGE CURRENT	< 0.5mA / 240VAC				
PROTECTION	OVERLOAD	115 ~ 135% rated output power				
		Protection type: Hiccup mode, recovers automatically after fault condition is removed				
	OVER VOLTAGE	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25V	28.4 ~ 32.4V	55.2 ~ 64.8V
			123 224 195	e, clamping by zer	250	
ENVIRONMENT	WORKING TEMP.	-10 ~ +60 °C (Refer to derating curve)				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
	STORAGE TEMP	-20 ~ +85 °C , 20 ~ 95% RH				
	TEMP.COEFFICIENT	±0.03%/°C (0~50°C)				
	VIBRATION	10 ~ 500Hz, 2G 10min/1cycle, 60min, each X Y Z axes				
SAFETY	SAFETY STANDARDS	GB4943.1, EN 60950.1 APPROVED				
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC				
	EMC EMISSION	EN61000-3-2:2014/EN61000-3-3:2013				
	EMC EIMMUNITY	EN 55032:2015 / EN55035:2017/60950-1				
OTHERS	MTBF	≥ 720.6K hrs MIL-HDBK-217F(25°C)				
	DIMENSION	129*98*38mm (L*W*H)				
	PACKING	0.4Kg; 45pcs/18Kg/0.9CUFT				
	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 ℃ of ambient temperature.					
	2. Ripple noise are measured at 20MHz of bandwidth by using a 12 twisted pair-wire with a 0.1uf and 47uf parallel capacitors					
	3. Tolerance includes set up tolerance, line regulation and load regulation.					
	4. Derating output is required under low input voltage, Please refer to the derating curve for details.					
	5. The power supply should be considered as a part of the components in the system, All EMC tests will test the test samples					
	and the state of t					


on a metal iron plate with a thickness of 1mm, a length of 360mm width 360mm.



POWER SUPPLY 12VDC 3A

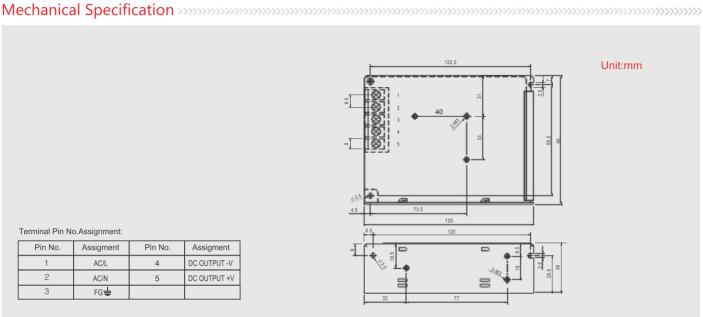

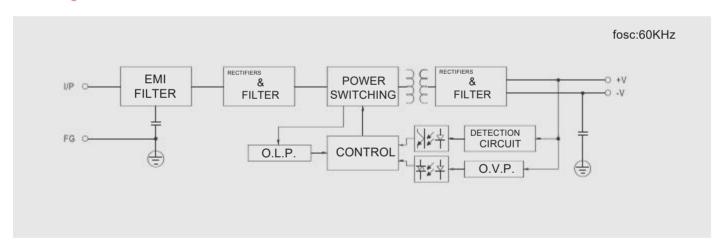

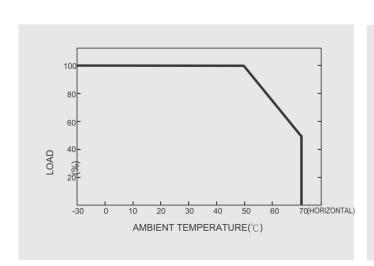

Static Characteristic

