

PC RACK



Floor Standing Rack

Specification

- Rack Framework
- Vented top cover
- movable PERFORATED and PERSPEX front door lock
- 2 detachable side panels with lock
- 40 sets of M6 caged nuts
- 1 power socket
- 2 nos Ventilation fan
- 2 nos Equipment tray
- 4 nos Caster wheel
- 4 nos adjustable panel mounting members
- High quality epoxy powder coating (Black)




Front & Side View
PERFORATED DOOR (P)




Front & Side View
PERSPEX DOOR (A)


Standard Accessories

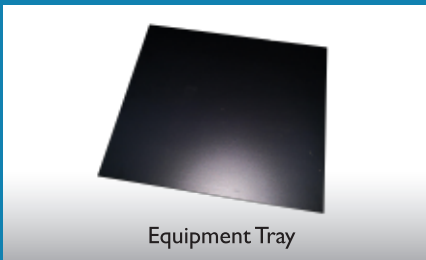


Equipment Tray

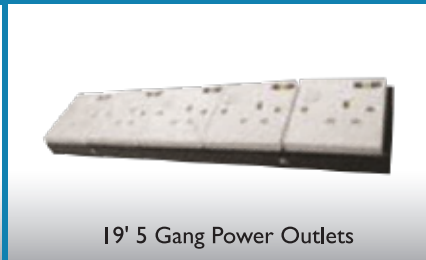

19' 5 Gang Power Outlets

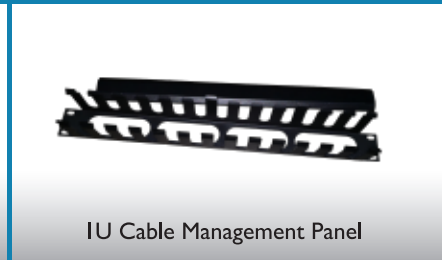

IU Cable Management Panel

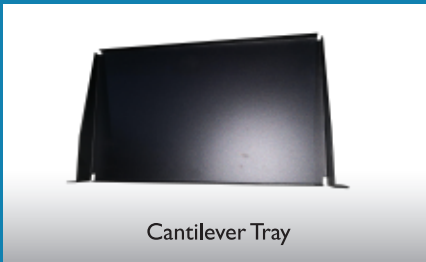

Cantilever Tray



Sliding Tray



Ventilation Fan

Model	U	Height (mm)	Width (mm)	Depth (mm)	Power Outlet (13Amp)	Packaging Dimension (H x W x D)	Weight (kg)
PC-15588FS	15	890	580	800	5 sockets	900 X 590 X 810	70
PC-18588FS	18	1020	580	800	5 sockets	1030 X 590 X 810	80
PC-24588FS	24	1200	580	800	5 sockets	1210 X 590 X 810	98
PC-28588FS	28	1380	580	800	3 sockets	1390 X 590 X 810	110
PC-133588FS	33	1600	580	800	10 sockets	1610 X 590 X 810	123
PC-37588FS	37	1778	580	800	10 sockets	1788 X 590 X 810	130
PC-42588FS	42	2000	580	800	10 sockets	2010 X 590 X 810	140

(P)= PERFORATED DOOR

(A) PERSPEX WITH FRAME

Economic - 0.8mm to 1mm
Quality - 1mm to 1.2mm