



# POWER SUPPLY 12VDC 10A

## PRODUCT FACTS

- ❖ Universal full range AC input power
- ❖ Built-in EMI filter, tiny ripple
- ❖ Protections short circuit/Overload/Over Voltage
- ❖ Cooling by free air convection
- ❖ 43,000 hours of continuous operating at 25°C
- ❖ 100% full load burn-in test
- ❖ Compliance to IEC/EN60335-1(PD3) and IEC/EN61558-1, 2-16 suitable for home appliance



Size: 199\*98\*38mm


## PRODUCT CODE

PS-12V10A

## SPECIFICATION



Model		S-120-5	S-120-12	S-120-15	S-120-24	S-120-48
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	48V
	RATED CURRENT	24A	10A	8A	5A	2.5A
	CURRENT RANGE	0 ~ 24A	0 ~ 10A	0 ~ 8A	0 ~ 5A	0 ~ 2.5A
	RATED POWER	120W	120W	100.5W	100.8W	100.8W
	RIPPLE NOISE (Max)	80mVp-p	100mVp-p	100mVp-p	120mVp-p	120mVp-p
	VOLTAGE ADJ. RANGE	4.5 ~ 5.5V	10.8 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 26.4V	43.2 ~ 52.8V
	VOLTAGE TOLERANCE	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	200ms , 100ms				
HOLD UP TIME (Typ.)	30ms (full load)					
INPUT	VOLTAGE RANGE	85 ~ 132VAC / 170~264VAC by switch 240~370VDC				
	FREQUENCY RANGE	47 ~ 63Hz				
	EFFICIENCY (Typ.)	78%	82%	84%	84%	84%
	AC CURRENT (Typ.)	1.9A/115V 1.2A/230V				
	INRUSH CURRENT (Typ.)	COLD START : 36A/230V				
LEAKAGE CURRENT	< 2.5mA / 240VAC					
PROTECTION	OVERLOAD	115 ~ 135% rated output power Protection type: Hiccup mode, recovers automatically after fault condition is removed				
	OVER VOLTAGE	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25V	28.4 ~ 32.4V	55.2 ~ 64.8V
ENVIRONMENT	WORKING TEMP.	-10 ~ +60°C (Refer to derating curve)				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
	STORAGE TEMP	-20 ~ +85°C, 20 ~ 95% RH				
	TEMP.COEFFICIENT	±0.03%/°C (0 ~ 50°C)				
	VIBRATION	10 ~ 500Hz, 2G 10min/1cycle, 60min, each X Y Z axes				
SAFETY	SAFETY STANDARDS	GB4943.1, EN 60950.1 APPROVED				
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC				
	EMC EMISSION	EN61000-3-2:2014/EN61000-3-3:2013				
	EMC IMMUNITY	EN 55032:2015 / EN55035:2017/60950-1				
OTHERS	MTBF	≥ 720.6K hrs MIL-HDBK-217F(25°C)				
	DIMENSION	199*98*38mm (L*W*H)				
	PACKING	0.5Kg; 30pcs/19.5Kg/0.9CUFT				
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input,rated load and 25°C of ambient temperature. 2. Ripple noise are measured at 20MHz of bandwidth by using a 12 twisted pair-wire with a 0.1uf and 47uf parallel capacitors 3. Tolerance includes set up tolerance, line regulation and load regulation. 4. Derating output is required under low input voltage, Please refer to the derating curve for details. 5. The power supply should be considered as a part of the components in the system, All EMC tests will test the test samples on a metal iron plate with a thickness of 1mm, a length of 360mm width 360mm.					



# POWER SUPPLY 12VDC 10A


## Mechanical Specification

Unit:mm


Terminal Pin No. Assignment:

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4-5	DC OUTPUT -V
2	AC/N	6-7	DC OUTPUT +V
3	FG		

## Block Diagram

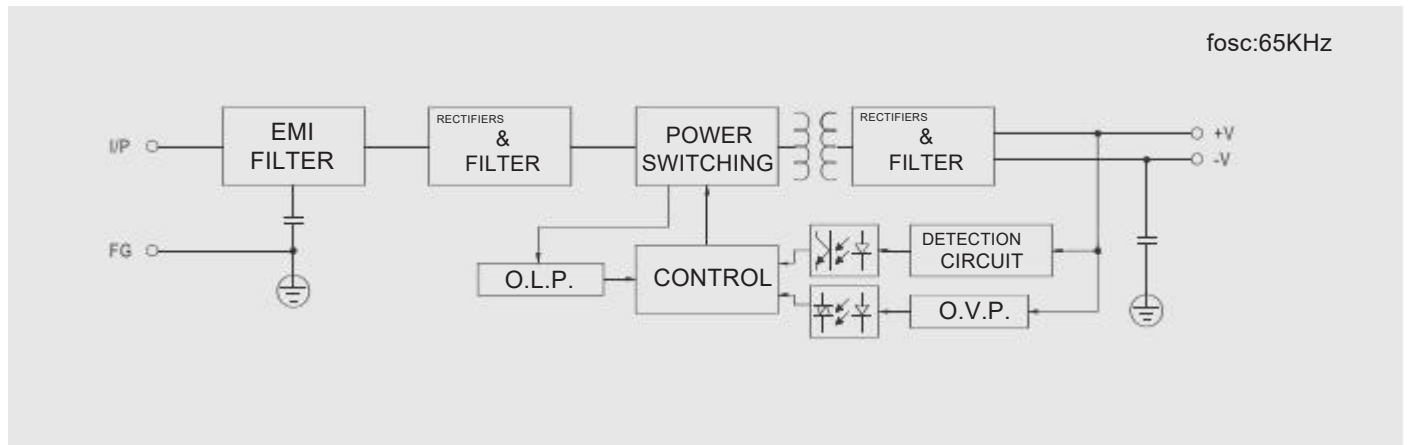

## Derating Curve

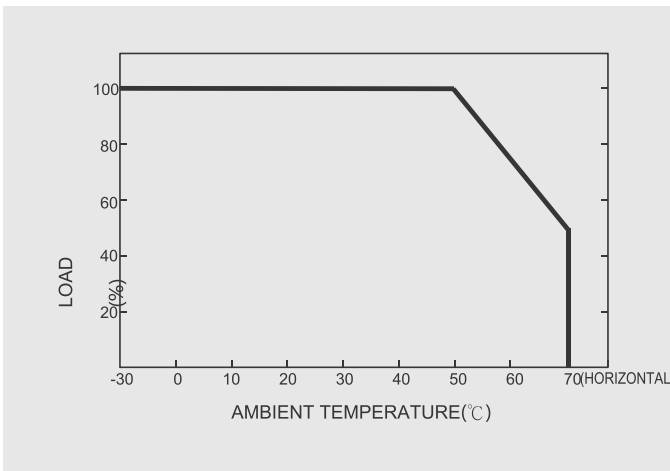

## Static Characteristic

