

DESCRIPTION

#TL-62 - CAST IRON JIS10K / ANSI150


A steam trap is a device used to discharge condensate and non-condensable gases with a negligible consumption or loss of live steam. Most steam traps are nothing more than automatic valves. They open, close or modulate automatically.

APPLICATIONS

- Suitable for steam 0.5 to 10bar
- Max. temperature 200°C

MATERIAL LIST

PART NAME	TL-62
1. Body	Cast Iron
2. Screen	SUS 304
3. Gasket	Asbestos
4. Nut	Cast Iron
5. Cap	Cast Iron
6. But	Cast Iron
7. Washer	AISI 420
8. Disc	SUS 304
9. Packing	Asbestos

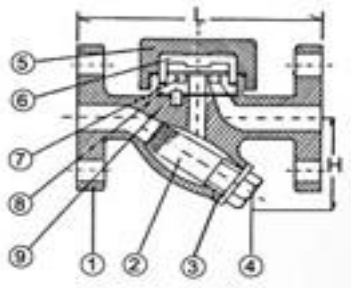

DIMENSIONS (mm)

Size	1/2	3/4	1	1-1/4	1-1/2	2
DN	15	20	25	32	40	50
L	145	160	170	205	205	240
H	68	75	87	110	110	115
Weight (kg)	3	3.6	5	7.5	9	10

The specification and dimensions are subject to change without prior notice!

DESCRIPTION

#TL-63 - CAST IRON THREADED END


A steam trap is a device used to discharge condensate and non-condensable gases with a negligible consumption or loss of live steam. Most steam traps are nothing more than automatic valves. They open, close or modulate automatically.

APPLICATIONS

- Suitable for steam 0.5 to 10bar
- Max. temperature 200°C

MATERIAL LIST

PART NAME	TL-63
1. Body	Cast Iron
2. Screen	SUS 304
3. Gasket	Asbestos
4. Nut	Cast Iron
5. Cap	Cast Iron
6. But	Cast Iron
7. Washer	AISI 420
8. Disc	SUS 304
9. Packing	Asbestos



DIMENSIONS (mm)

Size	1/2	3/4	1	1-1/4	1-1/2	2
DN	15	20	25	32	40	50
L	98	105	115	170	170	200
H	68	75	88	115	115	120
Weight (kg)	1.8	2	2.5	4.5	5	6.8

The specification and dimensions are subject to change without prior notice!