


BELLOWS SEAL GLOBE VALVE (DN200~DN400)
PN40 - GS-C25

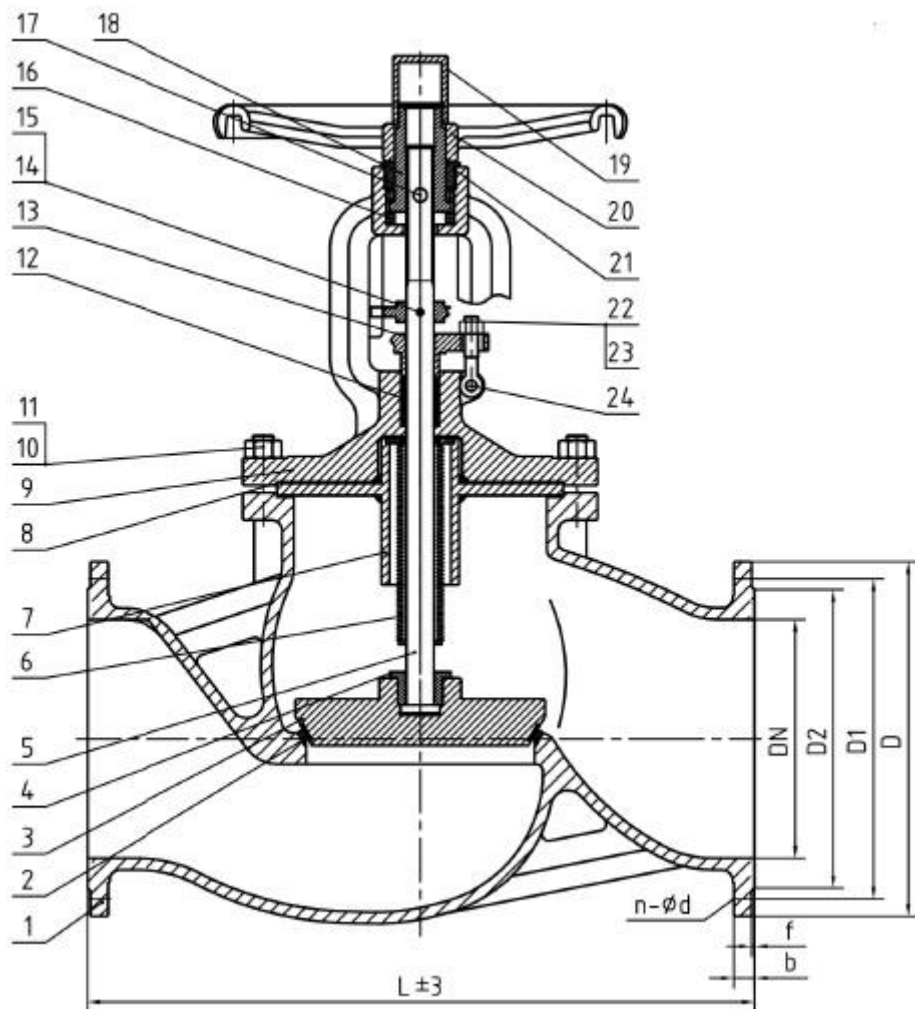

SIZE	DN	L	D	D1	D2	b	f	n-Ød				
8"	200	600	375	320	285	34	3	12-30				
10"	250	730	450	385	345	38	3	12-33				
12"	300	850	515	450	410	42	3	16-33				
14"	250	980	580	510	465	46	3	16-36				
16"	400	1100	660	585	535	50	3	16-39				

NO.	PART NAME	MATERIAL			
1	Body	GS-C25			
2	Seat	GS-C25+Cr13			
3	Disc	A105+13Cr			
4	Disc Cap	A105			
5	Stem	13Cr			
6	Bellows	304			
7	Sealing	1025			
8	Gasket	Graphite+304			
9	Bonnet	GS-C25			
10	Bolt	A193-B7			
11	Nut	A194-2H			
12	Packing	Graphite			
13	Gland	GS-C25			
14	Pin	1035			
15	Locator	GS-C25			
16	Bearing	Steel			
17	Oil Cup	Copper alloy			
18	Stem Nut	Steel			
19	Cap	A105			
20	Handwheel	Cast steel			
21	Bearing Cap	A105			
22	Nut	A194-2H			
23	Bolt	A193-B7			
24	Pin	1035			
MANUFACTURE STANDARD	Valve Design		DIN 3356		
	Test & Inspection		DIN 3230		
	Flange End Dimension		DIN 2543-2545		
	Face to Face		DIN 3202		
	Max. Temperature		350 °c		
Drawing No.		Date	Type	Rev. No.	By
A31010		2016.05.30	A3GLB-PN40	02	AT
BELLOWS SEAL GLOBE VALVE (DN200~DN400)					
PN40 - GS-C25					
TTS VALVE TECHNOLOGIES SDN BHD				AUTOMA	