



aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
hydraulics  
**pneumatics**  
process control  
sealing & shielding



# Parker Global Air Preparation System

Catalog 0750-2US



ENGINEERING YOUR SUCCESS.

**Global Air Preparation System**



**DECLARATION OF COMPLIANCE (ROHS)**

European Directive 2011/65/EU – RoHS (Restriction us of certain Hazardous Substances in electrical and electronic equipment), restricts the use of the 6 substances in the manufacture of specified electrical equipment.

**Lead:** Product containing lead and its compound (except for applications of lead as an alloying element by weight in steel up to 0.35%, in aluminium up to 0.4% and in copper alloys up to 4% and in circuit board solder) must not exceed 0.1% by weight

**Mercury:** The concentration level must not exceed 0.1% by volume

**Cadmium:** The concentration level must not exceed 0.01% by volume

**Hexavalent Chromiou:**

This is a corrosive protective finish used on our product line. Where this finish is utilized the Chromate solution is Hexavalent (Chrome 6) free.

**Polybrominated Biphenyls (PBB):**

The concentration level must not exceed 0.1% by weight. This substance is not know to be in any of our products.

**Polybrominated Diphenyl Esters (PBDE):**

The concentration level must not exceed 0.1% by weight. This substance is not know to be in any of our products.



Following Ignition Hazard Assessments performed on the non-electrical Global Air Preparation products they are in accordance with the requirements of EN 13463-1:2009, it was considered that the equipment does not contain its own source of ignition, and therefore is not within the scope of directive 94/9/EC.

The products can be used in a Group II Category 2 environment assuming that the ATEX Directive and the following conditions are complied with:

- Installation and maintenance of the product must be undertaken by qualified personnel.
- Do not mount the products in an area where impact may occur.
- Filters must be used to limit the introduction of particles and to capture particles generated in service.
- Supply air quality must be within ISO 8573-1:2010 Class 1.4.2.
- Maximum working temperature to be as stated on product label.
- WARNING – pulsating pressure and/or a closed circuit can generate heat.
- Deposits of dust on the product must not exceed 5mm thickness. Refer to technical file for surface areas of plastics. The unit must be earthed via the compressed air supply line.
- The unit must not come into contact with liquid solvents, acids or alkalis. Refer to technical file for chemicals known to be incompatible. Product cleaning must be undertaken using a method complying with the specifications of the ATEX zone, preferably by using mild soap and water or antistatic products.
- Regulators, Filter Regulators: Do not use Regulators or Filter Regulators within systems that can create vibration within the Regulator / Filter Regulator unit.
- Solenoid Operated Valves: Are suitable for use in an ATEX environment, (Group II Category 2) providing ATEX approved solenoids are fitted.
- Technical file available on request.



Global Air Preparation products supplied by Parker Hannifin have been designed and manufactured in accordance with “sound engineering practice”, as defined by Article 3 of Pressure Equipment Directive 97/23/EC.



Global Air Preparation product range is in compliance with REACH to ensure continued compliance additions to the list of SVHC (Substance of Very High Concern) are reviewed periodically.



Global Air Preparation product range has been designed and tested in accordance with ISO flow testing, envelope integrity, and catalog data presented.

- Filters – ISO 5782-1 & ISO 5782-2: 1997
- Regulators- ISO 6953-1 & ISO 6953-2: 2000
- Lubricators- ISO 6301-1 & ISO 6301-2: 2009

Global Air Preparation product range has been third party Shock & Vibration tested independently in accordance to EN 61373 : 1999, Category 2

**WARNING**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application including consequences of any failure, and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

**Offer of Sale**

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated on the separate page of this document entitled “Offer of Sale”.



**Global Air Preparation System**

Introduction ..... 4-13

Combos

- P31 Mini Series ..... 14
- P32 Compact Series ..... 15
- P33 Standard Series ..... 16
- Dimensions ..... 17

Filters

- P31 Mini Series ..... 18-19
- P32 Compact Series ..... 20-21
- P33 Standard Series ..... 22-23

Coalescing & Adsorber Filters

- P31 Mini Series ..... 24-25
- P32 Compact Series ..... 26-27
- P33 Standard Series ..... 28-29

Regulators

- P31 Mini Series ..... 30-31
- P31 Mini Common Port Regulator ..... 32-33
- P32 Compact Series ..... 34-35
- P32 Compact Common Port Regulator ..... 36-37
- P33 Standard Series ..... 38-39

Filter / Regulators

- P31 Mini Series ..... 40-41
- P32 Compact Series ..... 42-42
- P33 Standard Series ..... 44-45

Lubricators

- P31 Mini Series ..... 46-47
- P32 Compact Series ..... 48-49
- P33 Standard Series ..... 50-51

Proportional Regulators

- P31 Mini Series & P32 Compact Series ..... 52-61

Combined Soft Start / Dump Valve ..... 62-63

Dump Valve ..... 64-65

Soft Start Valve ..... 66-67

Redundant Safety Exhaust Valve ..... 68-71

Solenoid Operators ..... 72-73

Modular Ball Valves ..... 74

Manifold Blocks ..... 75

Accessories

- P31 Mini Series ..... 76
- P32 Compact Series ..... 77
- P33 Standard Series ..... 78

Accessories Kits ..... 79-82

Safety Guide ..... 84-85

Offer of Sale ..... 86



# Parker Global Air Preparation System

**Global.  
Modular.**



*Performance you need,  
**wherever** you need it.*



Full featured particulate and coalescing filters, regulators, filter/regulators, and lubricators are available with a wide range of standard options to meet air preparation needs.

The comprehensive Global Air Preparation System is available in three body sizes with either BSPP, BSPT, or NPT to accommodate thread type requirements.

Individual units can easily be assembled into various combinations, utilizing patented modular lightweight body connectors.

[www.parker.com/globalfrl](http://www.parker.com/globalfrl)

# Comprehensive Offering



**P31 Mini Series**  
 1/4" ports  
 40mm body width



**P32 Compact Series**  
 1/4", 3/8" and 1/2"  
 60mm body width



**P33 Standard Series**  
 1/2" and 3/4"  
 73mm body width



## Filters

- 5 $\mu$  particulate, 1.0 $\mu$  and 0.01 $\mu$  coalescing, and adsorber available as standard
- Transparent or metal bowl with manual or auto float drains standard



## Regulators

- Available as stand alone, common port and electronic proportional
- Both relieving and non-relieving versions available



## Filter / Regulators

- Compact design for space savings
- Available with all the same standard options as the filters and regulators



## Lubricators

- Proportional oil delivery over a wide range of air flows
- Fill under pressure



## Combinations

- Compact design for space savings
- Easily assembled
- Many configurations available




## Accessories







- Solenoid operated soft start, quick dump, and soft start/quick dump valves
- Manifold blocks
- Shut-off valves (both slide and ball type)
- Repair kits, gauges, etc.
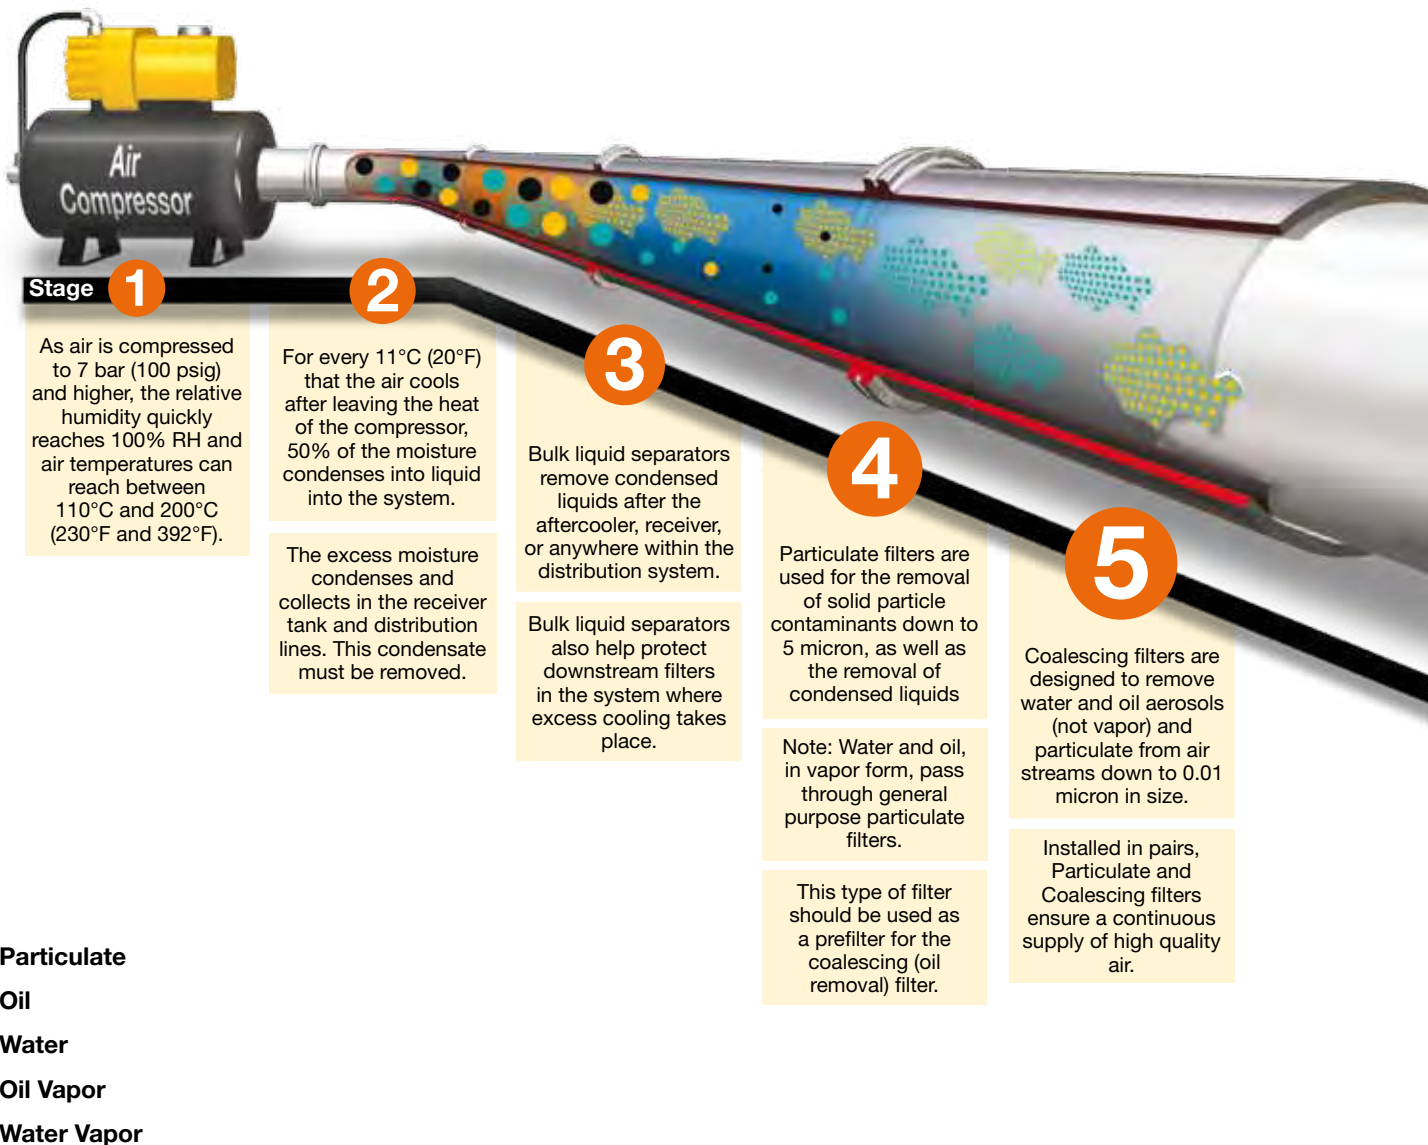
# Together we can power your application with clean, dry air

Fast cycle times, high product quality, and low downtime all require a clean, dry pneumatic system to function properly. Parker has what it takes to make sure pneumatic systems perform at their best.

## Clean, dry pneumatic systems with Parker Global Air Preparation



						
<b>Stages</b>	<b>1 2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>
<b>Function</b>	<b>Air Compressor</b>	<b>Bulk Liquid Removal</b>	<b>Particulate Filtration</b>	<b>Coalescing Filtration</b>	<b>Air Dryers</b>	<b>Hydrocarbon Removal</b>
<b>Application</b>	All pneumatic systems	Basic pneumatic systems	Basic pneumatic systems	Systems requiring highest quality air.	Systems requiring air with reduced moisture content	Systems requiring highest quality air for critical applications
<b>Description</b>	Air leaving the compressor room at 93°C (200°F) releases 95% of its moisture into the piping system when it cools to 38°C (100°F)	Removes bulk liquid contamination and protects filters where excess cooling takes place in the distribution piping	Removes solid particulates down to 5 micron, and the separation of bulk contaminants.	Removes liquid aerosols and submicron particulates (not vapor) down to 0.01 micron.	Removes water vapor from air stream. Dew point reduced down to 4°C (40°F) (refrigeration) or -40°C (-40°F) (desiccant).	Removal of odors and trace vapors for critical applications.
<b>Parker Global Air Preparation Solution</b>	Customer supplied	P3TF Bulk Liquid Separator	P31, P32, P33 Particulate Filter	P31, P32, P33 Coalescing Filter	PDRD Refrigeration Dryer P3TJ Regenerative Desiccant Dryer	P31, P32, P33 Activated Carbon (Adsorber) Filter




**6**

Refrigeration and desiccant dryers lower the air's dew point by removing water vapor, providing appropriately dry air for the downstream application.

**7**

Hydrocarbon and oil vapors are removed using filters utilizing activated carbon. Airborne hydrocarbons are often left over from the compressor oils.

# A completely modular air preparation system

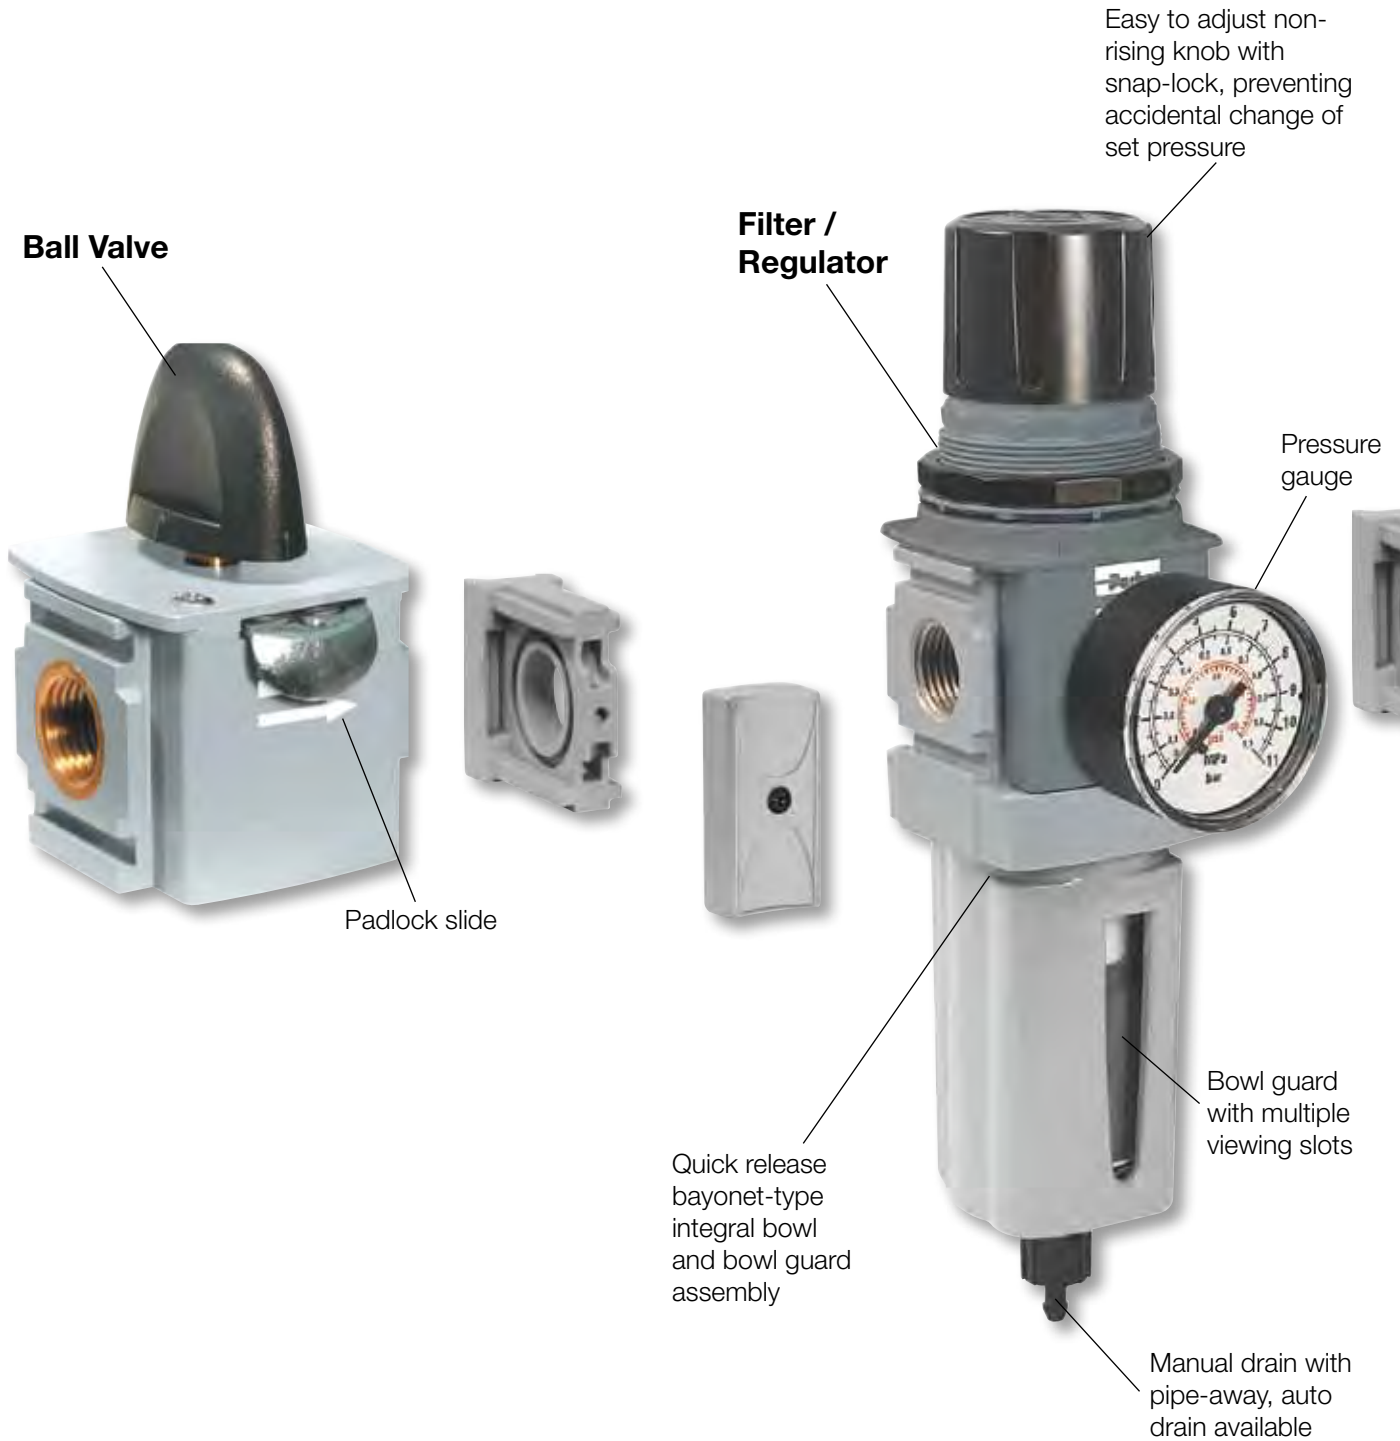





# Air Preparation

## P31 Mini Series

40mm body width  
 1/4" Ported

Flows up to:	dm <sup>3</sup> /s	(SCFM)
Filter	12	(25)
Coalescer	2	(4.2)
Regulator	30	(64)
Filter/Regulator	14	(30)
Lubricator	13	(28)

Features:

- Space saving integral gauge
- Manifold style regulators available
- OSHA compliant shut-off valves
- Soft-Start & Quick Dump valves
- Electronic Proportional Regulator



## P32 Compact Series

60mm body width  
 1/4", 3/8", & 1/2" Ported

Flows up to:	dm <sup>3</sup> /s	(SCFM)
Filter	38	(80)
Coalescer	11	(23)
Regulator	67	(142)
Filter/Regulator	64	(136)
Lubricator	47	(100)

Features:

- Manifold style regulators available
- OSHA Compliant shut-off valves
- Soft-Start & Quick Dump valves
- Electronic Proportional Regulator



## P33 Standard Series

73mm body width  
 1/2" & 3/4" Ported

Flows up to:	dm <sup>3</sup> /s	(SCFM)
Filter	48	(102)
Coalescer	20	(42)
Regulator	100	(212)
Filter/Regulator	98	(208)
Lubricator	68	(144)

Features:

- OSHA Compliant shut-off valves
- Soft-Start & Quick Dump valves (Utilizes P32 size only)
- Electronic proportional regulator (Utilizes P32 size only)



# Valves and Actuators

## Mini Series Complimentary Products

The P31 Mini Series FRL's and accessories are well matched for use with these Parker valves and actuators.



Isys Micro



Moduflex Size 1



OSP-P



P1D



P1A

## Compact Series Complimentary Products

The P32 Series FRL's & accessories are well matched for use with these Parker valves and actuators.



Isys Micro



Isys HA / HB



P1D



OSP-P

## Standard Series Complimentary Products

The P33 Series FRL's & accessories are well matched for use with these Parker valves and actuators.



Isys Size 1



Isys HA / HB



P1D



OSP-P

# Complete Pneumatic System

## Common Port Manifold Regulators

- Multiple output pressures (P2, P3, P4, etc.) with common inlet (P1)
- Available in two sizes P31 and P32
- Balanced valve design for accurate pressure regulation
- Outlet pressure ports in front and rear of unit.
- Four spring ranges available



## Electronic Proportional Regulator

- Electro-Pneumatic regulator
- Integrated systems control
- Accurate output pressure
- Micro parameter settings
- Selectable I/O parameters
- Quick, full flow exhaust
- LED display indicates output pressure
- No air consumption in steady state
- Multiple mounting options
- Protection to IP65



P31P Mini Series






P32P Compact Series

# Application Guide

**FRL to Valve:** The chart below contains recommendations for the correct selection of Global Air Preparation units to suit the number and size of valves in a typical application.

	<b>P31 Mini Series</b>				<b>P32 Compact Series</b>						<b>P33 Standard Series</b>					
	<b>Number of valves that would actuate at once</b>															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
<b>Moduflex 1</b>	Yellow	Yellow	Yellow	Yellow	Yellow	Green	Green	Green	Green	Green	Green	Green	Pink	Pink	Pink	Pink
<b>Isys Micro</b>	Yellow	Yellow	Yellow	Yellow	Green	Green	Green	Green	Green	Green	Green	Pink	Pink	Pink	Pink	Pink
<b>HB / Viking Xtreme</b>	Yellow	Yellow	Yellow	Green	Green	Green	Green	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink
<b>Moduflex 2</b>	Yellow	Yellow	Green	Green	Green	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink
<b>HA / Global ISO</b>	Yellow	Green	Green	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink	Pink
<b>See Larger Parker FRL Offering</b>																


**Actuator to FRL:** The chart below contains recommendations for the correct selection of Global Air Preparation units suitable for each cylinder size. If you have a tube length over 2 m, choose one tube size larger than the chart. The table is based on a Maximum cylinder speed of 0.5m/s

<b>Cyl Ø mm</b> Cyl Ø inches		<b>Cylinder bore size</b>														
		5 (5/16)	10 (7/16)	16 (9/16)	20 (3/4)	25 (1)	28 (1-1/8)	32 (1-1/4)	40 (1-1/2)	45 (1-3/4)	50 (2)	63 (2-1/2)	75 (3)	80 (3-1/4)	100 (4)	
<b>Tube Ø mm</b> Tube Ø inches		<b>Tube diameter external</b>														
		4 (5/32)	4 (5/32)	4 (5/32)	6 (1/4)	6 (1/4)	6 (1/4)	6 (1/4)	8 (5/16)	8 (5/16)	8 (5/16)	10 (3/8)	10 (3/8)	12 (1/2)	12 (1/2)	
<b>Number of cylinders actuating at once</b>	1	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
	2	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Green	Green
	3	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Green	Green
	4	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Green	Green
	5	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Green	Green
	6	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Green	Green
	7	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Green	Green
	8	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Green	Green
	9	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Green	Green
	10	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Green	Green
		<b>P31 Mini Series</b>				<b>P32 Compact Series</b>				<b>P33 Standard Series</b>				<b>See Larger Parker FRL Offering</b>		
																

**Note:** Data listed above is simply a guideline for a typical application only. Proper sizing and correct flow requirements must be taken into account.


**Global Air Preparation System**

**Popular Combinations**



**Filter + Regulator + Lubricator Combinations + Poly bowl**  
**5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets**  
**Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),**  
**1 bar (14.5 psig) pressure drop.**

Port size	Flow dm <sup>3</sup> /s	Flow (scfm)	Manual drain	Weight	Pulse drain	Weight
1/4"	13	27	<b>P31CB92GEMN5LNW</b>	0.46 kg (1.01 lbs)	<b>P31CB92GEBN5LNW</b>	0.46 kg (1.01 lbs)



**Filter/Regulator + Lubricator Combinations + Poly bowl**  
**5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets**  
**Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),**  
**1 bar (14.5 psig) pressure drop.**


Port size	Flow dm <sup>3</sup> /s	Flow (scfm)	Manual drain	Weight	Pulse drain	Weight
1/4"	14	28	<b>P31CA92GEMN5LNW</b>	0.35 kg (0.77 lbs)	<b>P31CA92GEBN5LNW</b>	0.35kg (0.77 lbs)

Filter / Regulator coding (use with codes: A M)		Lubricator coding (use with combo codes: A B)		Assembly configuration																																																																																										
Filter coding (use with combo codes: B F G). For multiple filters, repeat as needed	Regulator coding (use with combo code: B)																																																																																													
<b>P 3 1</b> <table border="1"> <tr><td>Combination</td><td>Q</td></tr> <tr><td>B/V + Combination</td><td>X</td></tr> <tr><td>Combination + B/V</td><td>C</td></tr> </table> <table border="1"> <tr><td>Thread type</td><td>1</td></tr> <tr><td>BSPP</td><td>2</td></tr> <tr><td>BSPT</td><td>9</td></tr> <tr><td>NPT</td><td></td></tr> </table> <table border="1"> <tr><td>Element</td><td>E</td></tr> <tr><td>5µ Element</td><td>C</td></tr> <tr><td>0.01µ Element</td><td>9</td></tr> <tr><td>1µ Element</td><td>A</td></tr> <tr><td>Adsorber</td><td></td></tr> </table> <table border="1"> <tr><td>Relief / Adjustment</td><td>N</td></tr> <tr><td>Non-rising knob</td><td></td></tr> </table> <table border="1"> <tr><td>Lub type</td><td>L</td></tr> <tr><td>Oil mist standard sight dome</td><td></td></tr> </table> <table border="1"> <tr><td>Mounting</td><td>A</td></tr> <tr><td>No bracket</td><td>C*</td></tr> <tr><td>Port blocks</td><td>D*</td></tr> <tr><td>Port blocks &amp; wall brkt</td><td></td></tr> <tr><td>Wall bracket</td><td>W</td></tr> </table>	Combination	Q	B/V + Combination	X	Combination + B/V	C	Thread type	1	BSPP	2	BSPT	9	NPT		Element	E	5µ Element	C	0.01µ Element	9	1µ Element	A	Adsorber		Relief / Adjustment	N	Non-rising knob		Lub type	L	Oil mist standard sight dome		Mounting	A	No bracket	C*	Port blocks	D*	Port blocks & wall brkt		Wall bracket	W	<table border="1"> <tr><td>Combination type*</td><td>A</td></tr> <tr><td>F/R+L</td><td>B</td></tr> <tr><td>F+R+L</td><td>F</td></tr> <tr><td>F+Fc</td><td>G</td></tr> <tr><td>F/R+Fc</td><td>M</td></tr> <tr><td>F+Fc1+Fc</td><td>Q</td></tr> </table> <table border="1"> <tr><td>Port size</td><td>2</td></tr> <tr><td>1/4</td><td></td></tr> </table> <table border="1"> <tr><td>Bowl type</td><td>G</td></tr> <tr><td>Poly bowl with bowl guard</td><td>M</td></tr> <tr><td>Metal bowl without sight gauge</td><td></td></tr> </table> <p><b>Note:</b> All bowl types are the same for each component  <b>Example:</b> If a "G" is specified for a F+L, both units would get a poly bowl with bowl guard.</p>	Combination type*	A	F/R+L	B	F+R+L	F	F+Fc	G	F/R+Fc	M	F+Fc1+Fc	Q	Port size	2	1/4		Bowl type	G	Poly bowl with bowl guard	M	Metal bowl without sight gauge		<table border="1"> <tr><td>Adjustment range</td><td></td></tr> <tr><td>With square gauge</td><td></td></tr> <tr><td>psig</td><td>bar</td></tr> <tr><td>30* = 1</td><td>2* = V</td></tr> <tr><td>60 = 3</td><td>4 = S</td></tr> <tr><td>125 = 5</td><td>8 = T</td></tr> <tr><td>Without gauge†</td><td></td></tr> <tr><td>psig</td><td>bar</td></tr> <tr><td>30 = Y</td><td>2 = Y</td></tr> <tr><td>60 = L</td><td>4 = L</td></tr> <tr><td>125 = N</td><td>8 = N</td></tr> </table> <p>* Unit comes with 0-4 bar or 0-60 psig gauge respectively.          † Order round gauges separately - see next page.</p>	Adjustment range		With square gauge		psig	bar	30* = 1	2* = V	60 = 3	4 = S	125 = 5	8 = T	Without gauge†		psig	bar	30 = Y	2 = Y	60 = L	4 = L	125 = N	8 = N	<table border="1"> <tr><td>Drain type</td><td>N</td></tr> <tr><td>No drain; closed end</td><td></td></tr> </table>	Drain type	N	No drain; closed end		<p>* For 3/8" Port Blocks please order separately. See Kits section.</p>
Combination	Q																																																																																													
B/V + Combination	X																																																																																													
Combination + B/V	C																																																																																													
Thread type	1																																																																																													
BSPP	2																																																																																													
BSPT	9																																																																																													
NPT																																																																																														
Element	E																																																																																													
5µ Element	C																																																																																													
0.01µ Element	9																																																																																													
1µ Element	A																																																																																													
Adsorber																																																																																														
Relief / Adjustment	N																																																																																													
Non-rising knob																																																																																														
Lub type	L																																																																																													
Oil mist standard sight dome																																																																																														
Mounting	A																																																																																													
No bracket	C*																																																																																													
Port blocks	D*																																																																																													
Port blocks & wall brkt																																																																																														
Wall bracket	W																																																																																													
Combination type*	A																																																																																													
F/R+L	B																																																																																													
F+R+L	F																																																																																													
F+Fc	G																																																																																													
F/R+Fc	M																																																																																													
F+Fc1+Fc	Q																																																																																													
Port size	2																																																																																													
1/4																																																																																														
Bowl type	G																																																																																													
Poly bowl with bowl guard	M																																																																																													
Metal bowl without sight gauge																																																																																														
Adjustment range																																																																																														
With square gauge																																																																																														
psig	bar																																																																																													
30* = 1	2* = V																																																																																													
60 = 3	4 = S																																																																																													
125 = 5	8 = T																																																																																													
Without gauge†																																																																																														
psig	bar																																																																																													
30 = Y	2 = Y																																																																																													
60 = L	4 = L																																																																																													
125 = N	8 = N																																																																																													
Drain type	N																																																																																													
No drain; closed end																																																																																														




Global Air Preparation System

Popular Combinations



**Filter + Regulator + Lubricator Combinations + Poly bowl**  
**5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets**  
**Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),**  
**1 bar (14.5 psig) pressure drop.**

Port size	dm <sup>3</sup> /s	Flow (scfm)	Manual drain	Weight	Auto drain	Weight
1/4"	20	42	<b>P32CB92GEMNGLNW</b>	1.29 kg (2.84 lbs)	<b>P32CB92GEANGLNW</b>	1.29 kg (2.84 lbs)
3/8"	32	68	<b>P32CB93GEMNGLNW</b>	1.29 kg (2.84 lbs)	<b>P32CB93GEANGLNW</b>	1.29 kg (2.84 lbs)
1/2"	40	85	<b>P32CB94GEMNGLNW</b>	1.29 kg (2.84 lbs)	<b>P32CB94GEANGLNW</b>	1.29 kg (2.84 lbs)



**Filter/Regulator + Lubricator Combinations + Poly bowl**  
**5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets**  
**Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),**  
**1 bar (14.5 psig) pressure drop.**

Port size	dm <sup>3</sup> /s	Flow (scfm)	Manual drain	Weight	Auto drain	Weight
1/4"	22	45	<b>P32CA92GEMNGLNW</b>	1.03 kg (2.27 lbs)	<b>P32CA92GEANGLNW</b>	1.03 kg (2.27 lbs)
3/8"	33	70	<b>P32CA93GEMNGLNW</b>	1.03 kg (2.27 lbs)	<b>P32CA93GEANGLNW</b>	1.03 kg (2.27 lbs)
1/2"	43	90	<b>P32CA94GEMNGLNW</b>	1.03 kg (2.27 lbs)	<b>P32CA94GEANGLNW</b>	1.03 kg (2.27 lbs)

**Filter / Regulator coding**  
(use with codes: A M)

Filter coding	Regulator coding	Lubricator coding	Assembly configuration
(use with combo codes: B F G). For multiple filters, repeat as needed	(use with combo code: B)	(use with combo codes: A B)	

P 3 2		Thread type		Port size		Element		Relief / Adjustment		Lub type		Mounting	
<b>Combination</b> B/V + Combination <b>Q</b> Combination + B/V <b>X</b> Combination <b>C</b>		BSPP <b>1</b> BSPT <b>2</b> NPT <b>9</b>		1/4 <b>2</b> 3/8 <b>3</b> 1/2 <b>4</b>		0.01µ Element <b>C</b> 0.01µ Element with dpi <b>D*</b> 5µ Element <b>E</b> 5µ Element with dpi <b>F*</b> 1µ Element <b>9</b> 1µ Element with dpi <b>Q*</b> Adsorber <b>A</b>		Non-rising knob relieving <b>N</b>		Oil mist standard sight dome <b>L</b>		No bracket <b>A</b> Port blocks <b>C</b> Port blocks & wall brkt <b>D</b> Wall bracket <b>W</b>	
<b>Combination type*</b> F/R+L <b>A</b> F+Fc+Fa <b>G</b> F+R+L <b>B</b> F/R+Fc <b>M</b> F+Fc <b>F</b> F+Fc1+Fc <b>Q</b>								<b>Adjustment range</b> <b>With round gauge</b> 2 bar; 30 psig; 0.2 MPa <b>Z</b> 4 bar; 60 psig; 0.4 MPa <b>M</b> 8 bar; 125 psig; 0.8 MPa <b>G</b> 17 bar; 250 psig; 1.7 MPa <b>J*</b> <b>Without gauge</b> 2 bar; 30 psig; 0.2 MPa <b>Y</b> 4 bar; 60 psig; 0.4 MPa <b>L</b> 8 bar; 125 psig; 0.8 MPa <b>N</b> 17 bar; 250 psig; 1.7 MPa <b>H*</b>		<b>Drain type</b> No drain; closed end <b>N</b>			

\* Combination type  
 F = 5µ  
 Fc1 = 1µ  
 Fc = .01µ  
 Fa = Adsorber

**Bowl type**  
 Poly bowl with bowl guard **G**  
 Metal bowl without sight gauge **M**  
 Metal bowl with sight gauge **S**


\* Not available when using lubricator.  
**Note:** All bowl types are the same for each component.  
**Example:** If a "G" is specified for a F+L, both units would get a poly bowl with bowl guard.

\* Not available with F/R.  
 \* Not available with poly bowl with bowl guard.




Global Air Preparation System

Popular Combinations



**Filter + Regulator + Lubricator Combinations + Poly bowl**  
**5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets**  
**Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),**  
**1 bar (14.5 psig) pressure drop.**

Port size	Flow		Manual drain	Weight	Auto drain	Weight
	dm <sup>3</sup> /s	(scfm)				
1/2"	43	90	<b>P33CB94GEMNGLNW</b>	1.84 kg (4.06 lbs)	<b>P33CB94GEANGLNW</b>	1.84 kg (4.06 lbs)
3/4"	52	110	<b>P33CB96GEMNGLNW</b>	1.84 kg (4.06 lbs)	<b>P33CB96GEANGLNW</b>	1.84 kg (4.06 lbs)



**Filter/Regulator + Lubricator Combinations + Poly bowl**  
**5 micron element, 8 bar (116 psig) Regulator + Gauge and Wall Mounting Brackets**  
**Inlet pressure 10 bar (145 psig), Secondary pressure 6.3 bar (91.3 psig),**  
**1 bar (14.5 psig) pressure drop.**

Port size	Flow		Manual drain	Weight	Auto drain	Weight
	dm <sup>3</sup> /s	(scfm)				
1/2"	52	110	<b>P33CA94GEMNGLNW</b>	1.51 kg (3.33 lbs)	<b>P33CA94GEANGLNW</b>	1.51 kg (3.33 lbs)
3/4"	71	150	<b>P33CA96GEMNGLNW</b>	1.51 kg (3.33 lbs)	<b>P33CA96GEANGLNW</b>	1.51 kg (3.33 lbs)

**Filter / Regulator coding**  
 (use with codes: A M)

Filter coding	Regulator coding	Lubricator coding	Assembly configuration
(use with combo codes: B F G). For multiple filters, repeat as needed	(use with combo code: B)	(use with combo codes: A B)	

**P 33**

Combination	
B/V + Combination	<b>Q</b>
Combination + B/V	<b>X</b>
Combination	<b>C</b>

Thread type	
BSPP	<b>1</b>
BSPT	<b>2</b>
NPT	<b>9</b>

Combination type*	
F/R+L	<b>A</b>
F+R+L	<b>B</b>
F+Fc	<b>F</b>
F+Fc+Fa	<b>G</b>
F/R+Fc	<b>M</b>
F+Fc+Fc	<b>Q</b>

Port size	
1/2	<b>4</b>
3/4	<b>6</b>

Bowl type	
Poly bowl with bowl guard	<b>G</b>
Metal bowl without sight gauge	<b>M*</b>
Metal bowl with sight gauge	<b>S</b>

\* Not available when using lubricator.  
**Note:** All bowl types are the same for each component.  
**Example:** If a "G" is specified for a F+L, both units would get a poly bowl with bowl guard.

Element	
0.01µ Element	<b>C</b>
0.01µ Element with dpi	<b>D*</b>
5µ Element	<b>E</b>
5µ Element with dpi	<b>F*</b>
1µ Element	<b>9</b>
1µ Element with dpi	<b>Q*</b>
Adsorbent	<b>A</b>

\* Not available with F/R.

Drain type	
Auto drain	<b>A</b>
Manual drain	<b>M</b>

Relief / Adjustment	
Non-rising knob relieving	<b>N</b>

Adjustment range	
With round gauge	
2 bar; 30 psig; 0.2 MPa	<b>Z</b>
4 bar; 60 psig; 0.4 MPa	<b>M</b>
8 bar; 125 psig; 0.8 MPa	<b>G</b>
17 bar; 250 psig; 1.7 MPa	<b>J*</b>
Without gauge	
2 bar; 30 psig; 0.2 MPa	<b>Y</b>
4 bar; 60 psig; 0.4 MPa	<b>L</b>
8 bar; 125 psig; 0.8 MPa	<b>N</b>
17 bar; 250 psig; 1.7 MPa	<b>H*</b>

\* Not available with poly bowl with bowl guard.

Lub type	
Oil mist standard sight dome	<b>L</b>

Drain type	
No drain; closed end	<b>N</b>


Mounting	
No bracket	<b>A</b>
Port blocks	<b>C</b>
Port blocks & wall brkt	<b>D</b>
Wall bracket	<b>W</b>




**Global Air Preparation System**

**Popular Combination Dimensions** mm (inches)


**P31C**

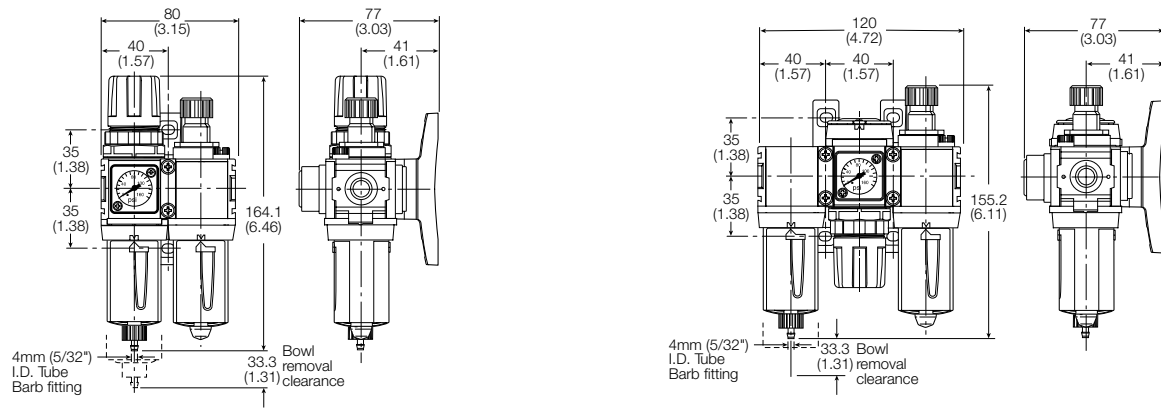

**P32C**

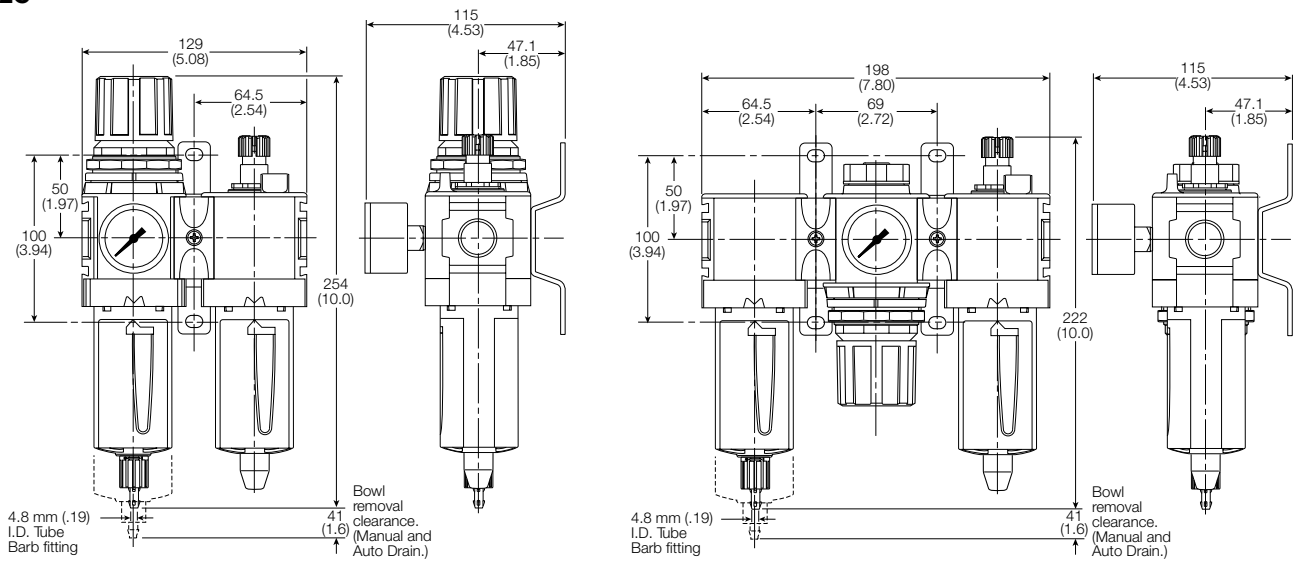

**P33C**

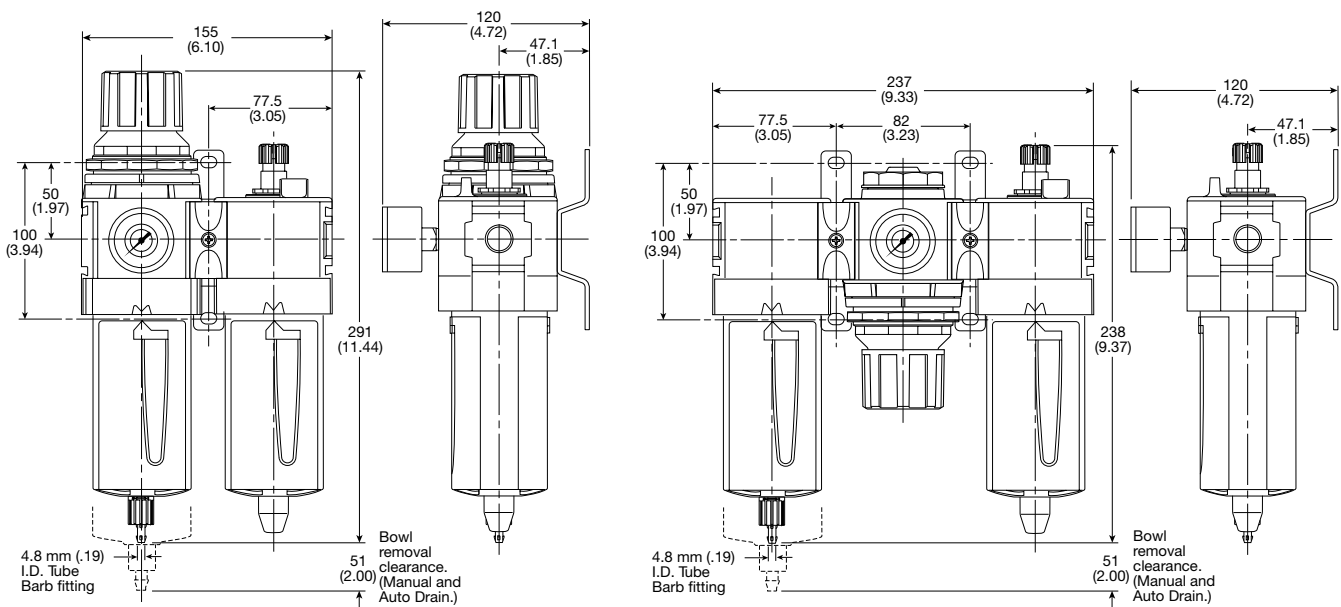


**Global Air Preparation System**


**Mini Particulate Filter - P31**



**Symbols**



Manual drain



Auto drain

- Integral 1/4" ports (NPT, BSPP & BSPT)
- High efficiency 5 micron element as standard
- Excellent water removal efficiency
- Robust but lightweight aluminum construction
- One hand operation for easy element cartridge removal
- Positive bayonet latch to ensure correct & safe fitting

**Options:**

<b>P31F</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>E</b>	<b>G</b>	<b>M</b>	<b>N</b>
<b>Basic series</b> Global modular mini particulate filter P31F	<b>Engr level</b> Current A	<b>Thread type</b> BSPP 1 BSPT 2 NPT 9	<b>Port size</b> 1/4 2	<b>Element</b> 5µ Element E		<b>Drain type</b> M Manual drain B Pulse drain	<b>Mounting</b> N No bracket
					<b>Bowl type</b> G Poly bowl with bowl guard M Metal bowl without sight gauge		

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - manual drain	<b>P31FA92EGMN</b>	12 (25)	10 (150)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Poly bowl - pulse drain	<b>P31FA92EGBN</b>	12 (25)	10 (150)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Metal bowl - manual drain	<b>P31FA92EMMN</b>	12 (25)	17 (250)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Metal bowl - pulse drain	<b>P31FA92EMBN</b>	12 (25)	17 (250)	116.3 (4.58)	40 (1.58)	42.7 (1.68)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 (4.9 psig) pressure drop.

**Global Air Preparation System**

**Specifications**

Flow capacity*	1/4	12 dm <sup>3</sup> /s (25 scfm)
Operating temperature	Plastic bowl	-10°C to 52°C (14°F to 125°F)
	Metal bowl	-10°C to 65.5°C (14°F to 150°F)
Max. supply pressure	Plastic bowl	10 bar (150 psig)
	Metal bowl	17 bar (250 psig)
Standard filtration		5 micron
Useful retention†		12 cm <sup>3</sup> (0.4 US oz.)
Port size	BSPP / BSPT / NPT 1/4	
Weight		0.11 kg (0.24 lbs)

\* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).  
 † Useful retention refers to volume below the quiet zone baffle.

**Air quality:**


Within ISO 8573-1: 1991 Class 3 (Particulates)  
 Within ISO 8573-1: 2001 Class 6 (Particulates)

**Material Specifications**


Body	Aluminum
Body cap	ABS
Bowl	Polycarbonate
Bowl guard	Nylon
Element retainer	Acetal
Baffle	Acetal
Filter element	Sintered polyethylene
Seals	Nitrile

**Flow Charts**

**1/4 Filter**

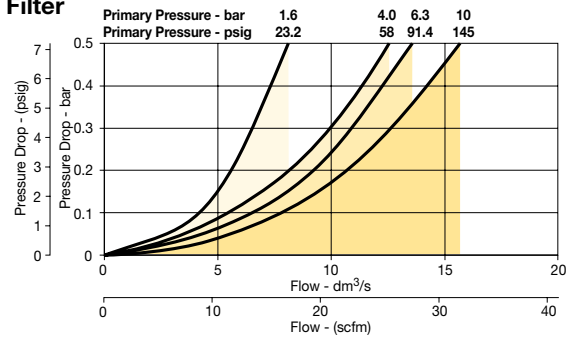

**Dimensions mm (inches)**

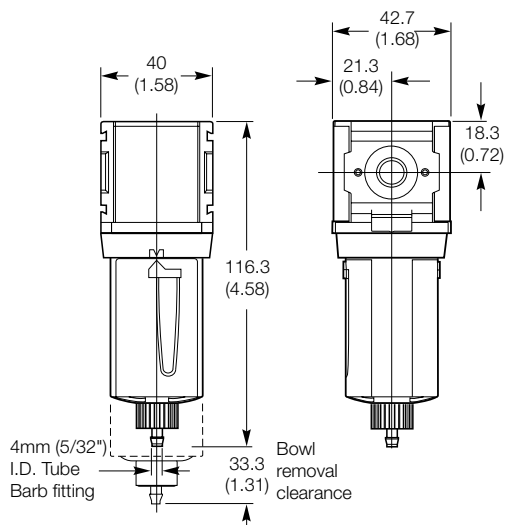

**Repair and Service Kits**


Plastic bowl / Bowl guard manual drain	<b>P31KA00BGM</b>
Metal bowl / w/o sight gauge manual drain	<b>P31KA00BMM</b>
Plastic bowl / Bowl guard pulse drain	<b>P31KA00BGB</b>
Metal bowl / w/o sight gauge pulse drain	<b>P31KA00BMB</b>
5µ particle filter element	<b>P31KA00ESE</b>
C-bracket (fits to body)	<b>P31KA00MW</b>
T-bracket with body connector	<b>P31KA00MT</b>
Body connector	<b>P31KA00CB</b>

**Global Air Preparation System**


**Compact Particulate Filter - P32**



**Symbols**



Manual drain



Auto drain

- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- High efficiency 5 micron element as standard
- Excellent water removal efficiency
- Robust but lightweight aluminum construction
- Positive bayonet latch to ensure correct & safe fitting

**Options:**

<b>P32F</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>E</b>	<b>G</b>	<b>M</b>	<b>N</b>
<b>Basic series</b> Global modular compact particulate filter P32F	<b>Engr level</b> Current A	<b>Thread type</b> BSPP 1 BSPT 2 NPT 9	<b>Port size</b> 1/4 2 3/8 3 1/2 4	<b>Element</b> 5µ Element E		<b>Drain type</b> M Manual drain A Auto drain	<b>Mounting</b> N No bracket
					<b>Bowl type</b> G Poly bowl with bowl guard M Metal bowl without sight gauge S Metal bowl with sight gauge		

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - manual drain	<b>P32FA92EGMN</b>	18 (38)	10 (150)	188 (7.4)	60 (2.36)	60 (2.36)
1/4"	Poly bowl - auto drain	<b>P32FA92EGAN</b>	18 (38)	10 (150)	182 (7.2)	60 (2.36)	60 (2.36)
1/4"	Metal bowl - manual drain	<b>P32FA92ESMN</b>	18 (38)	17 (250)	188 (7.4)	60 (2.36)	60 (2.36)
1/4"	Metal bowl - auto drain	<b>P32FA92ESAN</b>	18 (38)	17 (250)	182 (7.2)	60 (2.36)	60 (2.36)
3/8"	Poly bowl - manual drain	<b>P32FA93EGMN</b>	30 (64)	10 (150)	188 (7.4)	60 (2.36)	60 (2.36)
3/8"	Poly bowl - auto drain	<b>P32FA93EGAN</b>	30 (64)	10 (150)	182 (7.2)	60 (2.36)	60 (2.36)
3/8"	Metal bowl - manual drain	<b>P32FA93ESMN</b>	30 (64)	17 (250)	188 (7.4)	60 (2.36)	60 (2.36)
3/8"	Metal bowl - auto drain	<b>P32FA93ESAN</b>	30 (64)	17 (250)	182 (7.2)	60 (2.36)	60 (2.36)
1/2"	Poly bowl - manual drain	<b>P32FA94EGMN</b>	38 (80)	10 (150)	188 (7.4)	60 (2.36)	60 (2.36)
1/2"	Poly bowl - auto drain	<b>P32FA94EGAN</b>	38 (80)	10 (150)	182 (7.2)	60 (2.36)	60 (2.36)
1/2"	Metal bowl - manual drain	<b>P32FA94ESMN</b>	38 (80)	17 (250)	188 (7.4)	60 (2.36)	60 (2.36)
1/2"	Metal bowl - auto drain	<b>P32FA94ESAN</b>	38 (80)	17 (250)	182 (7.2)	60 (2.36)	60 (2.36)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 (4.9 psig) pressure drop.



**Global Air Preparation System**

**Specifications**

Flow capacity*	1/4	18 dm <sup>3</sup> /s (38 scfm)
	3/8	30 dm <sup>3</sup> /s (64 scfm)
	1/2	38 dm <sup>3</sup> /s (80 scfm)
Operating temperature	Plastic bowl	-25°C to 52°C (-13°F to 125°F)
	Metal bowl	-25°C to 65.5°C (-13°F to 150°F)
Max. supply pressure	Plastic bowl	10 bar (150 psig)
	Metal bowl	17 bar (250 psig)
Standard filtration	5 micron	
Useful retention†	51 cm <sup>3</sup> (1.7 US oz.)	
Port size	BSPP / BSPT / NPT 1/4, 3/8, 1/2	
Weight	0.28 kg (0.62 lbs)	

\* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).

† Useful retention refers to volume below the quiet zone baffle.

**Air quality:**


Within ISO 8573-1: 1991 Class 3 (Particulates)

Within ISO 8573-1: 2001 Class 6 (Particulates)

**Material Specifications**


Body	Aluminum	
Body cap	ABS	
Bowls	Plastic bowl	Polycarbonate
	Metal bowl	Aluminum
Bowl guard	Nylon	
Deflector	Polypropylene	
Element retainer / Baffle	Acetal	
Filter element	Sintered polyethylene	
Seals	Nitrile	
Sight gauge	Metal bowl	Polycarbonate

**Dimensions mm (inches)**

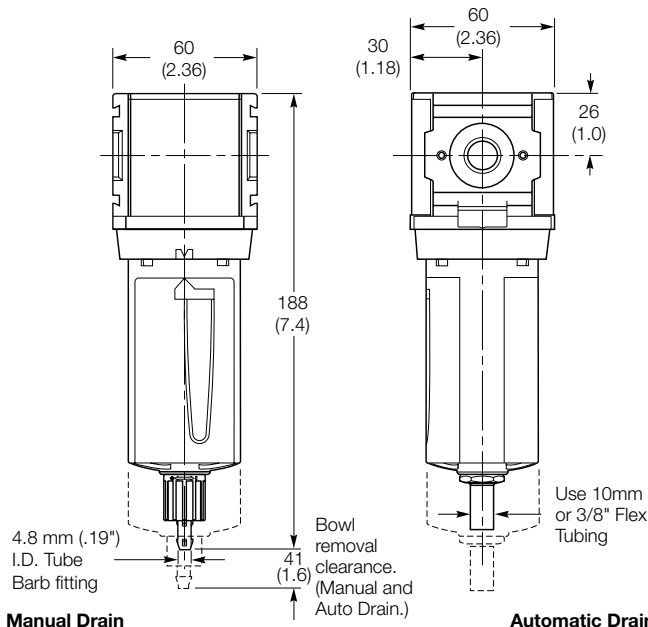


**Flow Charts**


**1/4 Filter**

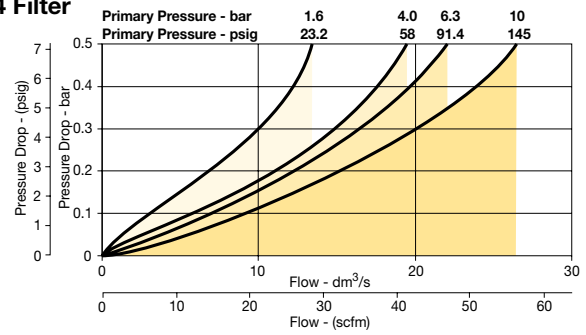

**3/8 Filter**

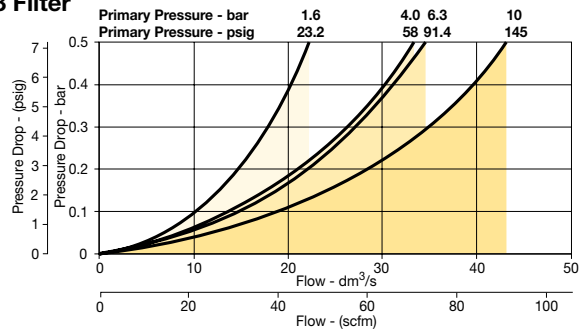

**1/2 Filter**

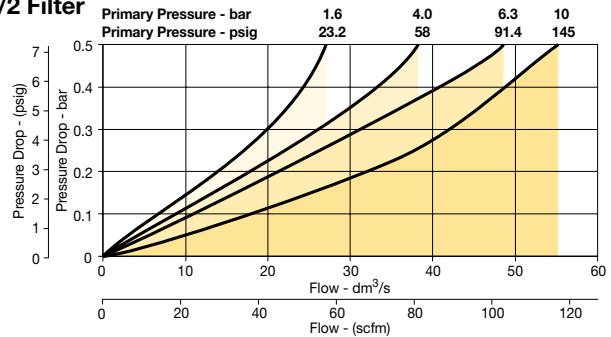

**Repair and Service Kits**


Plastic bowl / Bowl guard manual drain	<b>P32KA00BGM</b>
Metal bowl / Sight gauge manual drain	<b>P32KA00BSM</b>
Auto drain	<b>P32KA00DA</b>
5µ particle filter element	<b>P32KA00ESE</b>
L-bracket (fits to body)	<b>P32KA00ML</b>
T-bracket (fits to body connector)	<b>P32KA00MB</b>
T-bracket with body connector	<b>P32KA00MT</b>
Body connector	<b>P32KA00CB</b>
Differential pressure indicator (replacement)	<b>P32KA00RQ</b>

**Global Air Preparation System**


**Standard Particulate Filter - P33**



**Symbols**



Manual drain



Auto drain

- Integral 1/2" or 3/4" ports (NPT, BSPP & BSPT)
- High efficiency 5 micron element as standard
- Excellent water removal efficiency
- Robust but lightweight aluminum construction
- Positive bayonet latch to ensure correct & safe fitting

**Options:**

<b>P33F</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>E</b>	<b>G</b>	<b>M</b>	<b>N</b>
<b>Basic series</b> Global modular standard particulate filter P33F	<b>Engr level</b> Current A	<b>Thread type</b> BSPP 1 BSPT 2 NPT 9	<b>Port size</b> 1/2 4 3/4 6	<b>Element</b> 5µ Element E		<b>Drain type</b> M Manual drain A Auto drain	<b>Mounting</b> N No bracket
					<b>Bowl type</b> G Poly bowl with bowl guard M Metal bowl without sight gauge S Metal bowl with sight gauge		

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/2"	Poly bowl - manual drain	<b>P33FA94EGMN</b>	40 (85)	10 (150)	213 (8.4)	73 (2.9)	73 (2.9)
1/2"	Poly bowl - auto drain	<b>P33FA94EGAN</b>	40 (85)	10 (150)	207 (8.2)	73 (2.9)	73 (2.9)
1/2"	Metal bowl - manual drain	<b>P33FA94ESMN</b>	40 (85)	17 (250)	213 (8.4)	73 (2.9)	73 (2.9)
1/2"	Metal bowl - auto drain	<b>P33FA94ESAN</b>	40 (85)	17 (250)	207 (8.2)	73 (2.9)	73 (2.9)
3/4"	Poly bowl - manual drain	<b>P33FA96EGMN</b>	48 (102)	10 (150)	213 (8.4)	73 (2.9)	73 (2.9)
3/4"	Poly bowl - auto drain	<b>P33FA96EGAN</b>	48 (102)	10 (150)	207 (8.2)	73 (2.9)	73 (2.9)
3/4"	Metal bowl - manual drain	<b>P33FA96ESMN</b>	48 (102)	17 (250)	213 (8.4)	73 (2.9)	73 (2.9)
3/4"	Metal bowl - auto drain	<b>P33FA96ESAN</b>	48 (102)	17 (250)	207 (8.2)	73 (2.9)	73 (2.9)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 (4.9 psig) pressure drop.

# Global Air Preparation System

## Specifications

Flow capacity*	1/2	40 dm <sup>3</sup> /s (85 scfm)
	3/4	48 dm <sup>3</sup> /s (102 scfm)
Operating temperature	Plastic bowl	-25°C to 52°C (-13°F to 125°F)
	Metal bowl	-25°C to 65.5°C (-13°F to 150°F)
Max. supply pressure	Plastic bowl	10 bar (150 psig)
	Metal bowl	17 bar (250 psig)
Standard filtration		5 micron
Useful retention†		85 cm <sup>3</sup> (2.8 US oz.)
Port size	BSPP / BSPT / NPT	1/2, 3/4
Weight		0.46 kg (1.01 lbs)

\* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).

† Useful retention refers to volume below the quiet zone baffle.

### Air quality:


Within ISO 8573-1: 1991 Class 3 (Particulates)

Within ISO 8573-1: 2001 Class 6 (Particulates)

## Material Specifications


Body	Aluminum	
Body cap	ABS	
Bowls	Plastic bowl	Polycarbonate
	Metal bowl	Aluminum
Bowl guard	Nylon	
Deflector	Polypropylene	
Element retainer / Baffle	Acetal	
Filter element	Sintered polyethylene	
Seals	Nitrile	
Sight gauge	Metal bowl	Polycarbonate

## Dimensions mm (inches)

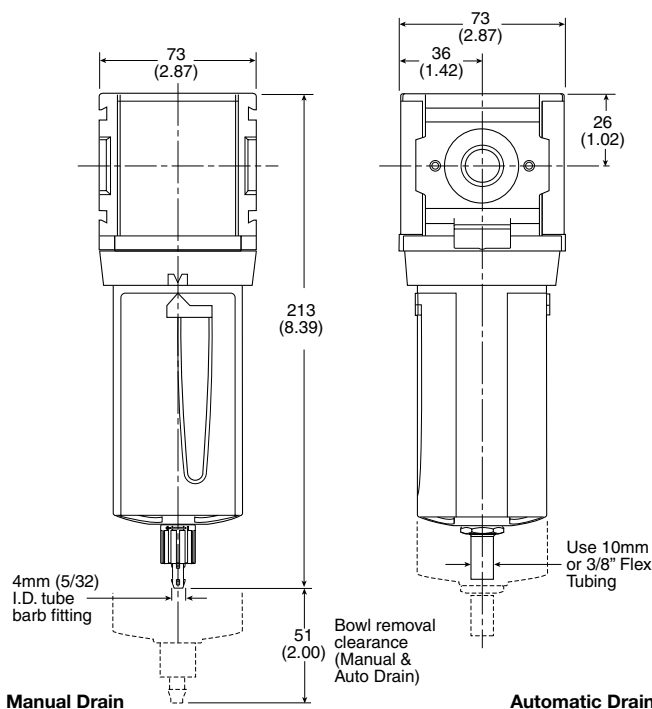


## Flow Charts

### 1/2 Filter

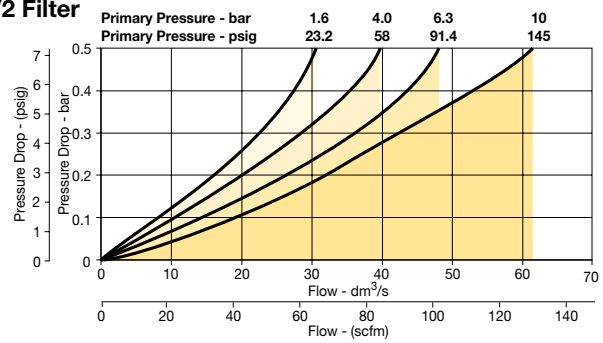

### 3/4 Filter

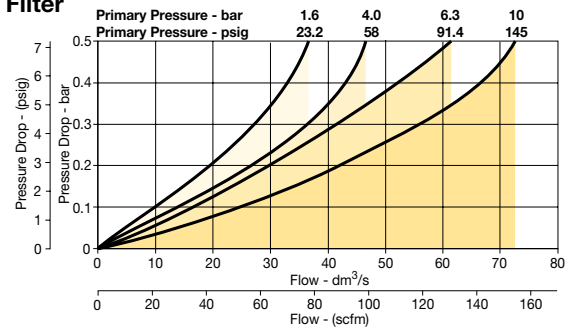


## Repair and Service Kits

Plastic bowl / Bowl guard manual drain	<b>P33KA00BGM</b>
Metal bowl / Sight gauge manual drain	<b>P33KA00BSM</b>
Auto drain	<b>P32KA00DA</b>
5μ particle filter element	<b>P33KA00ESE</b>
L-bracket (fits to body)	<b>P33KA00ML</b>
T-bracket (fits to body connector)	<b>P32KA00MB</b>
T-bracket with body connector	<b>P33KA00MT</b>
Body connector	<b>P32KA00CB</b>
Differential pressure indicator (replacement)	<b>P32KA00RQ</b>

**Global Air Preparation System**

**Mini Coalescing and Adsorber Filters - P31**

**Symbol**



- Integral 1/4" ports (NPT, BSPP & BSPT)
- Removes liquid aerosols and sub micron particles
- Oil free air for critical applications, such as air gauging, pneumatic instrumentation and control
- Positive bayonet latch to ensure correct & safe fitting
- Adsorbing activated carbon element removes oil vapors and most hydrocarbons

**Note:** To optimize the life of coalescing element, it is advisable to install a P31F pre-filter with a 5 micron element upstream of the coalescing filter.

To optimize the life of an Adsorber it is advisable to install a P31 Coalescing Filter upstream of the Adsorber. Adsorber element should be replaced approximately every 1000 hours of service.

**Options:**

<b>P31F</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>C</b>	<b>G</b>	<b>M</b>	<b>N</b>
<b>Basic series</b> Global modular mini coalescing filter P31F	<b>Engr level</b> Current A	<b>Thread type</b> BSPP 1 BSPT 2 NPT 9	<b>Port size</b> 1/4 2	<b>Element</b> 0.01µ Element C 0.01µ Element with DPI D 1µ Element 9 1µ Element with DPI Q Adsorber A	<b>Drain type</b> B Pulse drain M Manual drain	<b>Bowl type</b> G Poly bowl with bowl guard M Metal bowl without sight gauge	<b>Mounting</b> N No bracket

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - 0.01 micron - manual drain	<b>P31FA92DGMN</b>	2 (4.2)	10 (150)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Poly bowl - 0.01 micron - pulse drain	<b>P31FA92DGBN</b>	2 (4.2)	10 (150)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Metal bowl - 0.01 micron - manual drain	<b>P31FA92DMMN</b>	2 (4.2)	17 (250)	116.3 (4.58)	40 (1.58)	42.7 (1.68)
1/4"	Metal bowl - 0.01 micron - pulse drain	<b>P31FA92DMBN</b>	2 (4.2)	17 (250)	116.3 (4.58)	40 (1.58)	42.7 (1.68)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.2 (3 psig) pressure drop.



**Global Air Preparation System**

**Specifications**

Flow capacity		dm <sup>3</sup> /s	scfm
1.0 micron coalescing	Energy efficient flow*	3.8	(8)
	Maximum flow**	6	(13)
0.01 micron coalescing	Energy efficient flow*	2	(4.2)
	Maximum flow**	3.8	(8)
Activated carbon adsorber	Rated flow*	6	(13)
Operating temperature	Plastic bowl	-10°C to 52°C (14°F to 125°F)	
	Metal bowl	-10°C to 65.5°C (14°F to 150°F)	
Max. supply pressure	Plastic bowl	10 bar (150 psig)	
	Metal bowl	17 bar (250 psig)	
Standard filtration		1.0 and 0.01 micron	
Adsorber	Max. oil carryover (ppm w/w)	0.003 @ 21°C (70°F)	
Useful retention†		12 cm <sup>3</sup> (0.4 US oz.)	
Port size	BSPP / BSPT / NPT	1/4	
Weight		0.11 kg (0.24 lbs)	

\* Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.2 bar (3 psig), Saturated Element.


\*\* Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.4 bar (6 psig), Saturated Element.

† Useful retention refers to volume below the quiet zone baffle.

**Material Specifications**


Body	Aluminum	
Body cap	ABS	
Bowl	Plastic bowl	Polycarbonate
	Metal bowl	Aluminum
Filter element	1.0 and .01 micron	Borosilicate cloth
Adsorber	Activated carbon	
Seals	Nitrile	

**Dimensions mm (inches)**

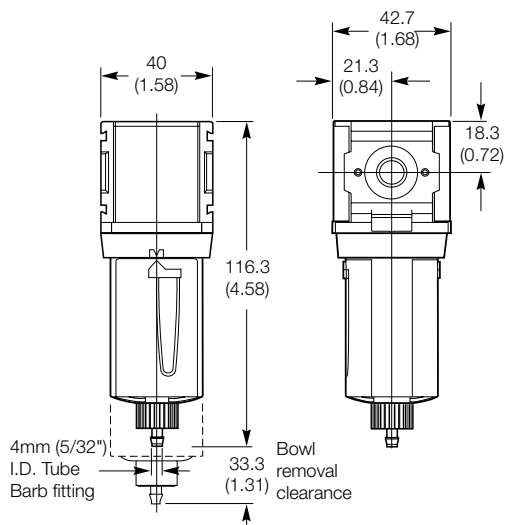


**Flow Charts**

**P31 - 1.0 micron flow**

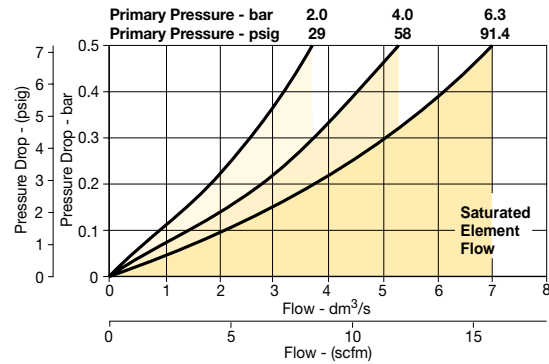

**P31 - 0.01 micron flow**

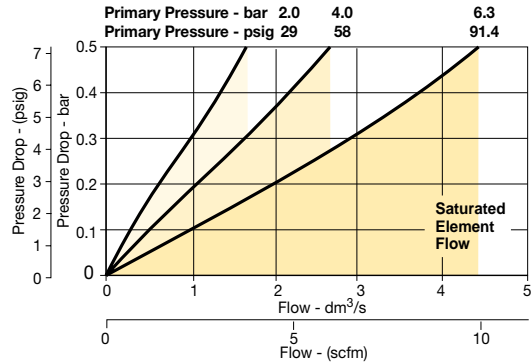


**Repair and Service Kits**

Plastic bowl / Bowl guard manual drain	<b>P31KA00BGM</b>
Metal bowl / w/o sight gauge manual drain	<b>P31KA00BMM</b>
Plastic bowl / Bowl guard pulse drain	<b>P31KA00BGB</b>
Metal bowl / w/o sight gauge pulse drain	<b>P31KA00BMB</b>
1µ coalescing filter element	<b>P31KA00ES9</b>
0.01µ coalescing filter element	<b>P31KA00ESC</b>
Activated carbon adsorber filter element	<b>P31KA00ESA</b>
C-bracket (fits to body)	<b>P31KA00MW</b>
T-bracket with body connector	<b>P31KA00MT</b>
Body connector	<b>P31KA00CB</b>

**Global Air Preparation System**

**Compact Coalescing and Adsorber Filter - P32 Symbol**



- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- Removes liquid aerosols and sub micron particles
- Oil free air for critical applications, such as air gauging, pneumatic instrumentation and control
- Differential Pressure Indicator (DPI) standard on Coalescing Filters
- Positive bayonet latch to ensure correct & safe fitting
- Adsorbing activated carbon element removes oil vapors and most hydrocarbons

**Note:** To optimize the life of coalescing element, it is advisable to install a P32F pre-filter with a 5 micron element upstream of the coalescing filter.  
To optimize the life of an Adsorber it is advisable to install a P32 Coalescing Filter upstream of the Adsorber. Adsorber element should be replaced approximately every 1000 hours of service.

**Options:**

<b>P32F</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>C</b>	<b>G</b>	<b>M</b>	<b>N</b>
<b>Basic series</b> Global modular compact coalescing filter <b>P32F</b>	<b>Engr level</b> Current <b>A</b>	<b>Thread type</b> BSPP <b>1</b> BSPT <b>2</b> NPT <b>9</b>	<b>Port size</b> 1/4 <b>2</b> 3/8 <b>3</b> 1/2 <b>4</b>	<b>Element</b> 0.01µ Element <b>C</b> 0.01µ Element with DPI <b>D</b> 1µ Element <b>9</b> 1µ Element with DPI <b>Q</b> Adsorber <b>A</b>	<b>Drain type</b> <b>M</b> Manual drain <b>A</b> Auto drain (P32, P33)	<b>Bowl type</b> <b>G</b> Poly bowl with bowl guard <b>M</b> Metal bowl without sight gauge <b>S</b> Metal bowl with sight gauge	<b>Mounting</b> <b>N</b> No bracket

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - 0.01 micron, manual drain	<b>P32FA92DGMN</b>	11 (23)	10 (150)	209 (8.2)	60 (2.36)	60 (2.36)
1/4"	Poly bowl - 0.01 micron, auto drain	<b>P32FA92DGAN</b>	11 (23)	10 (150)	203 (8.0)	60 (2.36)	60 (2.36)
1/4"	Metal bowl - 0.01 micron, manual drain	<b>P32FA92DSMN</b>	11 (23)	17 (250)	209 (8.2)	60 (2.36)	60 (2.36)
1/4"	Metal bowl - 0.01 micron, auto drain	<b>P32FA92DSAN</b>	11 (23)	17 (250)	203 (8.0)	60 (2.36)	60 (2.36)
3/8"	Poly bowl - 0.01 micron, manual drain	<b>P32FA93DGMN</b>	11 (23)	10 (150)	209 (8.2)	60 (2.36)	60 (2.36)
3/8"	Poly bowl - 0.01 micron, auto drain	<b>P32FA93DGAN</b>	11 (23)	10 (150)	203 (8.0)	60 (2.36)	60 (2.36)
3/8"	Metal bowl - 0.01 micron, manual drain	<b>P32FA93DSMN</b>	11 (23)	17 (250)	209 (8.2)	60 (2.36)	60 (2.36)
3/8"	Metal bowl - 0.01 micron, auto drain	<b>P32FA93DSAN</b>	11 (23)	17 (250)	203 (8.0)	60 (2.36)	60 (2.36)
1/2"	Poly bowl - 0.01 micron, manual drain	<b>P32FA94DGMN</b>	11 (23)	10 (150)	209 (8.2)	60 (2.36)	60 (2.36)
1/2"	Poly bowl - 0.01 micron, auto drain	<b>P32FA94DGAN</b>	11 (23)	10 (150)	203 (8.0)	60 (2.36)	60 (2.36)
1/2"	Metal bowl - 0.01 micron, manual drain	<b>P32FA94DSMN</b>	11 (23)	17 (250)	209 (8.2)	60 (2.36)	60 (2.36)
1/2"	Metal bowl - 0.01 micron, auto drain	<b>P32FA94DSAN</b>	11 (23)	17 (250)	203 (8.0)	60 (2.36)	60 (2.36)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.2 (3 psig) pressure drop.



**Global Air Preparation System**

**Specifications**

Flow capacity		dm <sup>3</sup> /s	scfm
1.0 micron coalescing	Energy efficient flow*	17	(36)
	Maximum flow**	27	(57)
0.01 micron coalescing	Energy efficient flow*	11	(23)
	Maximum flow**	28	(38)
Activated carbon adsorber	Rated flow*	27	(57)
Operating temperature	Plastic bowl	-25°C to 52°C (-13°F to 125°F)	
	Metal bowl	-25°C to 65.5°C (-13°F to 150°F)	
Max. supply pressure	Plastic bowl	10 bar (150 psig) <sup>§</sup>	
	Metal bowl	10 bar (150 psig) <sup>§</sup>	
Standard filtration		1.0 and 0.01 micron	
Adsorber	Max. oil carryover (ppm w/w)	0.003 @ 21°C (70°F)	
Useful retention <sup>†</sup>		51 cm <sup>3</sup> (1.7 US oz.)	
Port size	BSPP / BSPT / NPT	1/4, 3/8, 1/2	
Weight		0.32 kg (0.71 lbs)	


\* Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.2 bar (3 psig), Saturated Element.

\*\* Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.4 bar (6 psig), Saturated Element.

<sup>†</sup> Useful retention refers to volume below the quiet zone baffle.

<sup>§</sup> Without pressure indicator (DPI) – max. supply pressure for metal bowl version is 17 bar (250 psig).

**Dimensions mm (inches)**

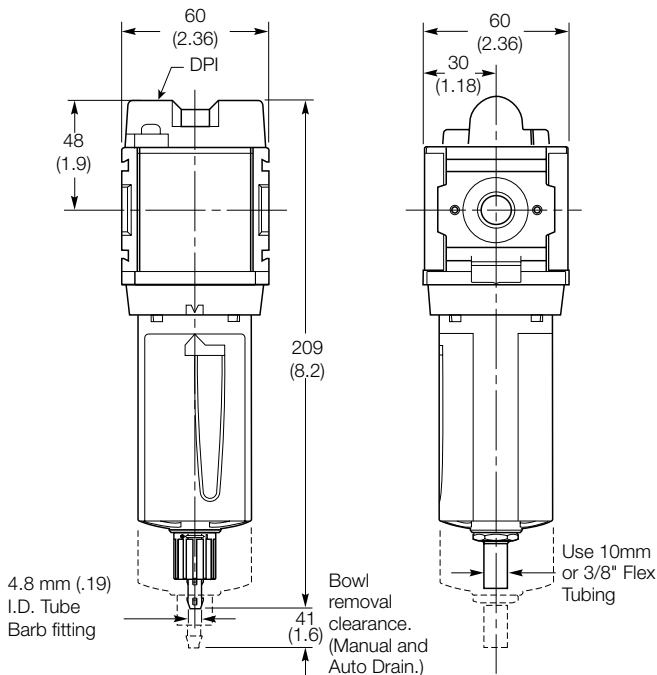


**Manual Drain**


**Automatic Drain**

**Flow Charts**

**P32 - 1.0 micron flow**

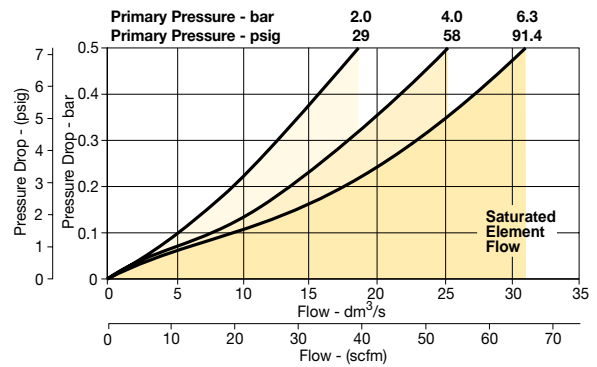

**P32 - 0.01 micron flow**

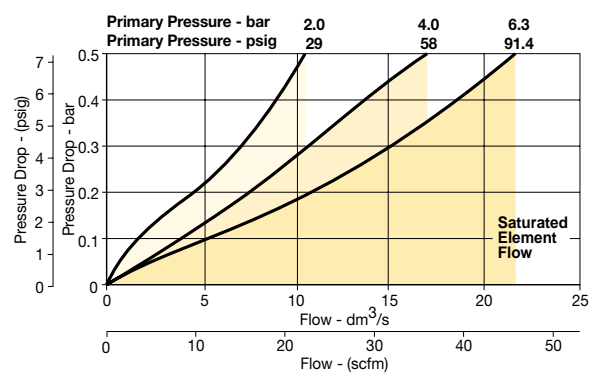

**Material Specifications**

Body	Aluminum	
Body cap	ABS	
Bowls	Plastic bowl	Polycarbonate
	Metal bowl	Aluminum
Filter element	1.0 and .01 micron	Borosilicate cloth
Adsorber	Activated carbon	
Seals	Nitrile	
Sight gauge	Metal bowl	Polycarbonate


**Repair and Service Kits**

Plastic bowl / Bowl guard manual drain	<b>P32KA00BGM</b>
Metal bowl / Sight gauge manual drain	<b>P32KA00BSM</b>
Auto drain	<b>P32KA00DA</b>
1µ coalescing filter element	<b>P32KA00ES9</b>
0.01µ coalescing filter element	<b>P32KA00ESC</b>
Activated carbon adsorber filter element	<b>P32KA00ESA</b>
L-bracket (fits to body)	<b>P32KA00ML</b>
T-bracket (fits to body connector)	<b>P32KA00MB</b>
T-bracket with body connector	<b>P32KA00MT</b>
Body connector	<b>P32KA00CB</b>
Differential pressure indicator (replacement)	<b>P32KA00RQ</b>



**Global Air Preparation System**

**Standard Coalescing and Adsorber Filter - P33 Symbol**



- Integral 1/2" or 3/4" ports (NPT, BSPP & BSPT)
- Removes liquid aerosols and sub micron particles
- Oil free air for critical applications, such as air gauging, pneumatic instrumentation and control
- Differential Pressure Indicator (DPI) standard on Coalescing Filters
- Positive bayonet latch to ensure correct & safe fitting
- Adsorbing activated carbon element removes oil vapors and most hydrocarbons

**Note:** To optimize the life of coalescing element, it is advisable to install a P33F pre-filter with a 5 micron element upstream of the coalescing filter.

To optimize the life of an Adsorber it is advisable to install a P33 Coalescing Filter upstream of the Adsorber. Adsorber element should be replaced approximately every 1000 hours of service.

**Options:**

<b>P33F</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>C</b>	<b>G</b>	<b>M</b>	<b>N</b>
<b>Basic series</b> Global modular standard coalescing filter P33F	<b>Engr level</b> Current A	<b>Thread type</b> BSPP 1 BSPT 2 NPT 9	<b>Port size</b> 1/2 4 3/4 6	<b>Element</b> 0.01µ Element C 0.01µ Element with DPI D 1µ Element 9 1µ Element with DPI Q Adsorber A	<b>Drain type</b> M Manual drain A Auto drain	<b>Bowl type</b> G Poly bowl with bowl guard M Metal bowl without sight gauge S Metal bowl with sight gauge	<b>Mounting</b> N No bracket

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/2"	Poly bowl - 0.01 micron, manual drain	<b>P33FA94DGMN</b>	20 (42)	10 (150)	235 (9.3)	73 (2.9)	73 (2.9)
1/2"	Poly bowl - 0.01 micron, auto drain	<b>P33FA94DGAN</b>	20 (42)	10 (150)	229 (9.0)	73 (2.9)	73 (2.9)
1/2"	Metal bowl - 0.01 micron, manual drain	<b>P33FA94DSMN</b>	20 (42)	17 (250)	235 (9.3)	73 (2.9)	73 (2.9)
1/2"	Metal bowl - 0.01 micron, auto drain	<b>P33FA94DSAN</b>	20 (42)	17 (250)	229 (9.0)	73 (2.9)	73 (2.9)
3/4"	Poly bowl - 0.01 micron, manual drain	<b>P33FA96DGMN</b>	20 (42)	10 (150)	235 (9.3)	73 (2.9)	73 (2.9)
3/4"	Poly bowl - 0.01 micron, auto drain	<b>P33FA96DGAN</b>	20 (42)	10 (150)	229 (9.0)	73 (2.9)	73 (2.9)
3/4"	Metal bowl - 0.01 micron, manual drain	<b>P33FA96DSMN</b>	20 (42)	17 (250)	235 (9.3)	73 (2.9)	73 (2.9)
3/4"	Metal bowl - 0.01 micron, auto drain	<b>P33FA96DSAN</b>	20 (42)	17 (250)	229 (9.0)	73 (2.9)	73 (2.9)

† Standard part numbers shown in bold. For other models refer to Options chart above.  
‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.2 (3 psig) pressure drop.



# Global Air Preparation System

## Specifications

Flow capacity		dm <sup>3</sup> /s	scfm
1.0 micron coalescing	Energy efficient elow*	32	(68)
	Maximum flow**	44	(93)
0.01 micron coalescing	Energy efficient fow*	20	(42)
	Maximum flow**	34	(72)
Activated carbon adsorber	Rated flow*	44	(93)
Operating temperature	Plastic bowl	-25°C to 52°C (-13°F to 125°F)	
	Metal bowl	-25°C to 65.5°C (-13°F to 150°F)	
Max. supply pressure	Plastic bowl	10 bar (150 psig) <sup>§</sup>	
	Metal bowl	10 bar (150 psig) <sup>§</sup>	
Standard filtration		1.0 and 0.01 micron	
Adsorber	Max. oil carryover (ppm w/w)	0.003 @ 21°C (70°F)	
Useful retention <sup>†</sup>		85 cm <sup>3</sup> (2.8 US oz.)	
Port size	BSPP / BSPT / NPT	1/2, 3/4	
Weight		0.50 kg (1.10 lbs)	


\* Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.2 bar (3 psig), Saturated Element.

\*\* Inlet pressure 6.3 bar (91.3 psig), Pressure drop 0.4 bar (6 psig), Saturated Element.

<sup>†</sup> Useful retention refers to volume below the quiet zone baffle.


<sup>§</sup> Without pressure indicator (DPI) – max. supply pressure for metal bowl version is 17 bar (250 psig).

## Dimensions mm (inches)

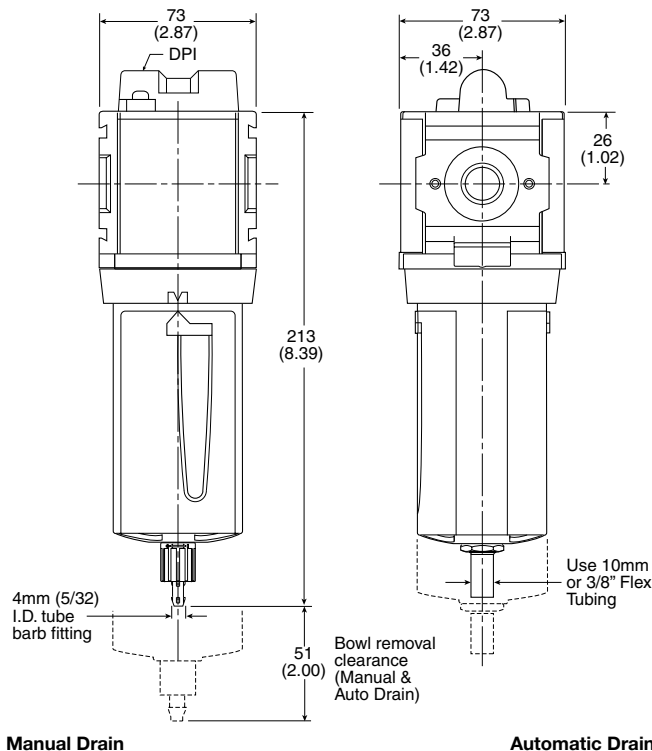


## Flow Charts

### P33 - 1.0 micron flow

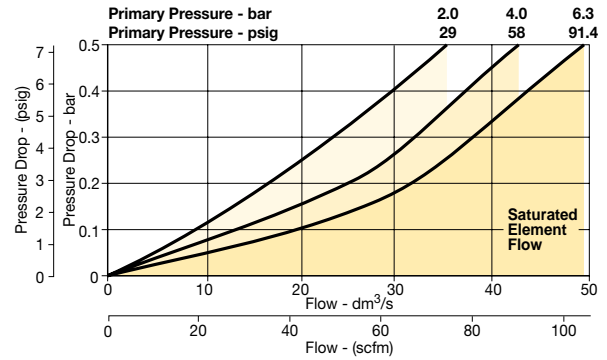

### P33 - 0.01 micron flow

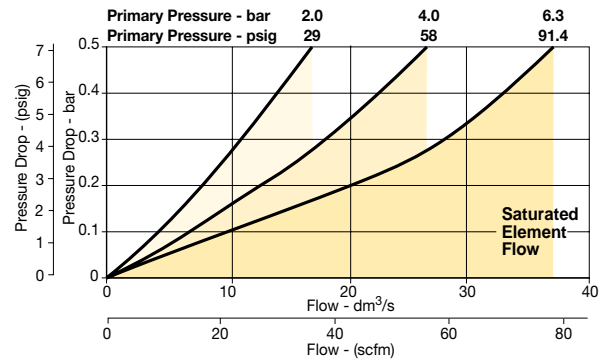

## Material Specifications

Body	Aluminum	
Body cap	ABS	
Bowls	Plastic bowl	Polycarbonate
	Metal bowl	Aluminum
Filter element	1.0 and .01 micron	Borosilicate cloth
Adsorber	Activated carbon	
Seals	Nitrile	
Sight gauge	Metal bowl	Polycarbonate

## Repair and Service Kits


Plastic bowl / Bowl guard manual drain	<b>P33KA00BGM</b>
Metal bowl / Sight gauge manual drain	<b>P33KA00BSM</b>
Auto drain	<b>P32KA00DA</b>
1µ coalescing filter element	<b>P33KA00ES9</b>
0.01µ coalescing filter element	<b>P33KA00ESC</b>
Activated carbon adsorber filter element	<b>P33KA00ESA</b>
L-bracket (fits to body)	<b>P33KA00ML</b>
T-bracket (fits to body connector)	<b>P32KA00MB</b>
T-bracket with body connector	<b>P32KA00MT</b>
Body connector	<b>P32KA00CB</b>
Differential pressure indicator (replacement)	<b>P32KA00RQ</b>

**Global Air Preparation System**


**Mini Regulator - P31**



**Symbols**



Self relieving regulator with gauge



Non relieving regulator

- Integral 1/4" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation.
- Relieving & Non-relieving types
- Non-rising knob

**Options:**

<b>P31R</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>B</b>	<b>N</b>	<b>N</b>	<b>P</b>																					
<b>Basic series</b> Global modular mini regulator <b>P31R</b>	<b>Engr level</b> Current <b>A</b>	<b>Thread type</b> BSPP <b>1</b> BSPT <b>2</b> NPT <b>9</b>	<b>Port size</b> 1/4" <b>2</b>	<b>Relief</b> Relieving <b>B</b> Non-relieving <b>N</b> Reverse flow-relieving <b>R</b>	<b>Adjustment range</b>			<b>Mounting</b> <b>P</b> Plastic panel mount nut																				
						<table border="1"> <tr><th colspan="2">With square gauge</th></tr> <tr><td>psig</td><td>bar</td></tr> <tr><td><b>30* = 1</b></td><td><b>2* = V</b></td></tr> <tr><td><b>60 = 3</b></td><td><b>4 = S</b></td></tr> <tr><td><b>125 = 5</b></td><td><b>8 = T</b></td></tr> <tr><th colspan="2">Without gauge†</th></tr> <tr><td>psig</td><td>bar</td></tr> <tr><td><b>30 = Y</b></td><td><b>2 = Y</b></td></tr> <tr><td><b>60 = L</b></td><td><b>4 = L</b></td></tr> <tr><td><b>125 = N</b></td><td><b>8 = N</b></td></tr> </table>		With square gauge		psig	bar	<b>30* = 1</b>	<b>2* = V</b>	<b>60 = 3</b>	<b>4 = S</b>	<b>125 = 5</b>	<b>8 = T</b>	Without gauge†		psig	bar	<b>30 = Y</b>	<b>2 = Y</b>	<b>60 = L</b>	<b>4 = L</b>	<b>125 = N</b>	<b>8 = N</b>	
With square gauge																												
psig	bar																											
<b>30* = 1</b>	<b>2* = V</b>																											
<b>60 = 3</b>	<b>4 = S</b>																											
<b>125 = 5</b>	<b>8 = T</b>																											
Without gauge†																												
psig	bar																											
<b>30 = Y</b>	<b>2 = Y</b>																											
<b>60 = L</b>	<b>4 = L</b>																											
<b>125 = N</b>	<b>8 = N</b>																											
<b>Bold items are most common.</b>				* Unit comes with 0-4 bar or 0-60 psig gauge respectively. † Order round gauges separately - see next page.																								

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) relieving	<b>P31RA92BNNP</b>	30 (64)	20 (300)	100.1 (3.94)	40 (1.58)	40 (1.58)
1/4"	8 bar (125 psig) + gauge	<b>P31RA92BN5P</b>	30 (64)	20 (300)	100.1 (3.94)	40 (1.58)	64.3 (2.53)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3) psig) set pressure and 1 bar (14.5 psig) pressure drop.

# Global Air Preparation System

## Specifications

Flow capacity*	1/4	30 dm <sup>3</sup> /s (64 scfm)
Operating temperature†	-20°C to 65.5°C (-4°F to 150°F)	
Max. supply pressure	20 bar (300 psig)	
Adjusting range pressure	0-2 bar (30 psig)	
	0-4 bar (60 psig)	
	0-8 bar (125 psig)	
	0-17 bar (250 psig)	
Port size	BSPP / BSPT / NPT	1/4
Gauge port (2 ea.)**	BSPP / BSPT / NPT	1/8
Weight	0.17 kg (0.37 lbs)	

\* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

\*\* Non-gauge option only.


† Units with square gauges: -15°C to 65.5°C (5°F to 150°F)

## Material Specifications

Body	Aluminum
Adjustment knob	Acetal
Body cap	ABS
Bonnet	PBT
Diaphragm assembly	Brass / Nitrile
Bottom plug	33% glass-filled nylon
Valve assembly	Brass / Nitrile
Springs	Steel
Seals	Nitrile
Panel nut	Acetal

## Dimensions mm (inches)

**NOTE:** 31.7 mm (1.25 in.) hole required for panel nut mounting.

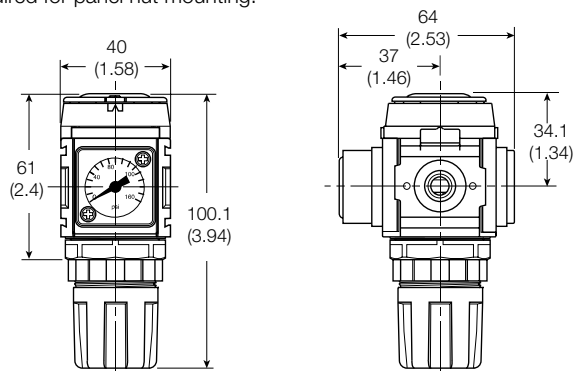

### WARNING


**Product rupture can cause serious injury. Do not connect regulator to bottled gas. Do not exceed Maximum primary pressure rating.**

### CAUTION:

**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

## Flow Charts

### 1/4 Regulator

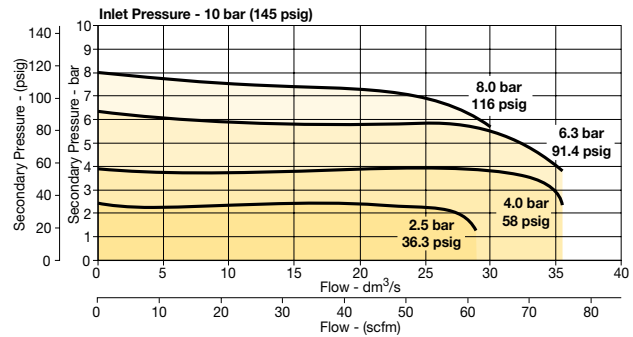

## Repair and Service Kits

Regulator repair kit - relieving	<b>P31KA00RB</b>
Regulator repair kit - non-relieving	<b>P31KA00RC</b>
Panel mount nut - aluminum	<b>P31KA00MM</b>
Panel mount nut - plastic	<b>P31KA00MP</b>
Angle bracket (uses panel mount threads)	<b>P31KB00MR</b>
C-bracket (fits to body)	<b>P31KA00MW</b>
T-bracket with body connector	<b>P31KA00MT</b>
Body connector	<b>P31KA00CB</b>

## Gauges

### Square flush mount gauge

0-4 bar	<b>K4511SCR04B</b>
0-10 bar	<b>K4511SCR11B</b>
0-60 psig	<b>K4511SCR060</b>
0-150 psig	<b>K4511SCR150</b>

### 1.00" Round 1/8" center back mount

0-60 psig / 0-4 bar	<b>K4510N18060</b>
0-160 psig / 0-11 bar	<b>K4510N18160</b>

### 40mm Round 1/8" center back mount



(Not for use with Common Port Regulators)

0-30 psig / 0-2 bar	<b>K4515N18030</b>
0-60 psig / 0-4 bar	<b>K4515N18060</b>
0-160 psig / 0-11 bar	<b>K4515N18160</b>


For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

**Global Air Preparation System**


**Mini Common - P1 Regulator - P31**

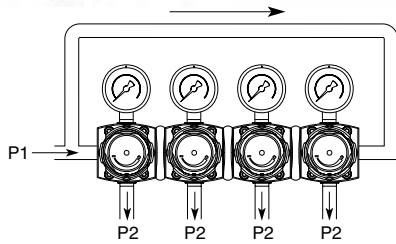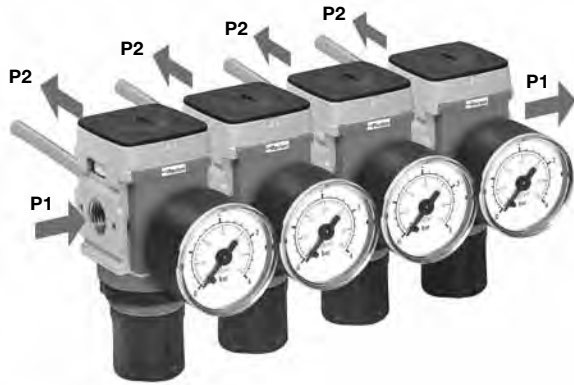

**Symbols**



Self relieving regulator with gauge



Non relieving regulator

- Manifold style regulator with line pressure on both sides.
- Pressure output is at front or rear.
- Integral 1/4" ports (NPT, BSPP & BSPT)
- Robust construction
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Relieving & Non-relieving types
- Non-rising knob

**Options:**

<b>P31H</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>B</b>	<b>N</b>	<b>N</b>	<b>P</b>
<b>Basic series</b> Global modular mini common regulator P31H	<b>Engr level</b> Current A	<b>Thread type</b> BSPP 1 BSPT 2 NPT 9	<b>Port size</b> 1/4 2	<b>Relief</b> Relieving B Non-relieving N			<b>Mounting</b> P Plastic panel mount nut
					<b>Adjustment range</b> <b>Without gauge</b> Y 2 bar; 30 psig; 0.2 MPa L 4 bar; 60 psig; 0.4 MPa N 8 bar; 125 psig; 0.8 MPa		

Order round gauges separately - see next page.

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) relieving	<b>P31HA92BNNP</b>	18 (38)	20 (300)	100.1 (3.94)	40 (1.58)	40 (1.58)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3 psig) set pressure and 1 bar (14.5 psig) pressure drop.



# Global Air Preparation System

## Specifications

Flow capacity*	1/4	18 dm <sup>3</sup> /s (38 scfm)
Operating temperature	-20°C to 65.5°C (-4°F to 150°F)	
Max. supply pressure	20 bar (300 psig)	
Adjusting range pressure	0-2 bar (30 psig) 0-4 bar (60 psig) 0-8 bar (125 psig) 0-17 bar (250 psig)	
P1 Port size (Inlet / Outlet)	BSPP / BSPT / NPT	1/4
P2 Regulated ports (2 ea.)	BSPP / BSPT / NPT	1/8
Weight	0.30 kg (0.66 lbs)	


\* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

## Materials of Construction

Body	Zinc
Adjustment knob	Acetal
Body cap	ABS
Bonnet	33% Glass-filled PBT
Diaphragm assembly	Brass / Nitrile
Bottom plug	33% Glass-filled nylon
Valve assembly	Brass / Nitrile

## Dimensions mm (inches)

**NOTE:** 31.7 mm (1.25 in.) hole required for panel nut mounting.

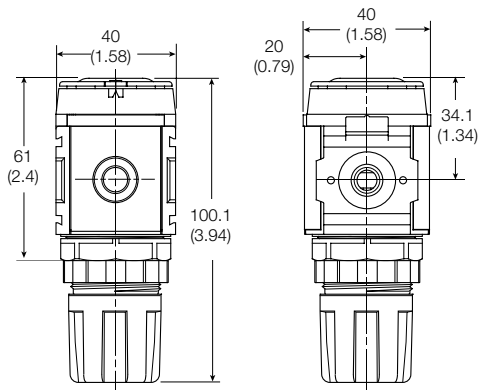

### WARNING


**Product rupture can cause serious injury.  
Do not connect regulator to bottled gas.  
Do not exceed Maximum primary pressure rating.**

## CAUTION:

**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

## Flow Charts

### 1/4 Common Regulator

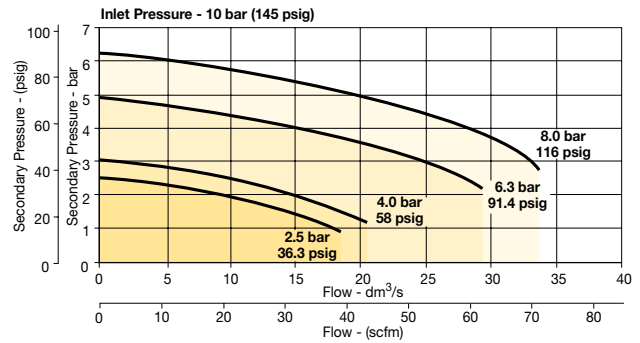

## Repair and Service Kits

Regulator repair kit - relieving	<b>P31KA00RB</b>
Regulator repair kit - non-relieving	<b>P31KA00RC</b>
Panel mount nut - aluminum	<b>P31KA00MM</b>
Panel mount nut - plastic	<b>P31KA00MP</b>
Angle bracket (uses panel mount threads)	<b>P31KB00MR</b>
T-bracket with body connector	<b>P31KA00MT</b>
Body connector	<b>P31KA00CB</b>

## Gauges

### 1.00" Round 1/8" center back mount

0-60 psig / 0-4 bar	<b>K4510N18060</b>
0-160 psig / 0-11 bar	<b>K4510N18160</b>


For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

**Global Air Preparation System**

**Compact Regulator – P32**



**Symbols**

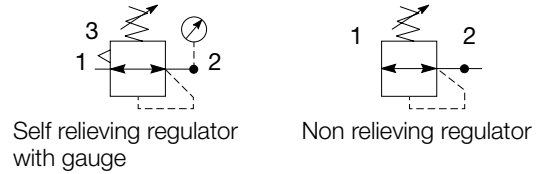

- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Relieving & Non-relieving types
- Non-rising knob

**Options:**

<b>P32R</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>B</b>	<b>N</b>	<b>N</b>	<b>P</b>
<b>Basic series</b> Global modular compact regulator <b>P32R</b>	<b>Engr level</b> Current <b>A</b>	<b>Thread type</b> BSPP <b>1</b> BSPT <b>2</b> NPT <b>9</b>	<b>Port size</b> 1/4 <b>2</b> 3/8 <b>3</b> 1/2 <b>4</b>	<b>Relief</b> Relieving <b>B</b> Non-relieving <b>N</b> Reverse flow-relieving <b>R</b>			<b>Mounting</b> <b>P</b> Plastic panel mount nut
					<b>Adjustment range</b>		
					<b>With round gauge</b>		
					<b>Z</b>	2 bar; 30 psig; 0.2 MPa	
					<b>M</b>	4 bar; 60 psig; 0.4 MPa	
					<b>G</b>	8 bar; 125 psig; 0.8 MPa	
					<b>J</b>	17 bar; 250 psig; 1.7 MPa	
					<b>Without gauge</b>		
					<b>Y</b>	2 bar; 30 psig; 0.2 MPa	
					<b>L</b>	4 bar; 60 psig; 0.4 MPa	
					<b>N</b>	8 bar; 125 psig; 0.8 MPa	
					<b>H</b>	17 bar; 250 psig; 1.7 MPa	

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) relieving	<b>P32RA92BNNP</b>	41 (81)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
1/4"	8 bar (125 psig) relieving + gauge	<b>P32RA92BNGP</b>	41 (81)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) relieving	<b>P32RA93BNNP</b>	65 (138)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) relieving + gauge	<b>P32RA93BNGP</b>	65 (138)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
1/2"	8 bar (125 psig) relieving	<b>P32RA94BNNP</b>	67 (142)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
1/2"	8 bar (125 psig) relieving + gauge	<b>P32RA94BNGP</b>	67 (142)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3 psig) set pressure and 1 bar (14.5 psig) pressure drop.

**CAUTION:**

**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

**⚠ WARNING**

**Product rupture can cause serious injury.  
Do not connect regulator to bottled gas.  
Do not exceed Maximum primary pressure rating.**



# Global Air Preparation System

## Specifications

Flow capacity*	1/4	41 dm <sup>3</sup> /s (81 scfm)
	3/8	65 dm <sup>3</sup> /s (138 scfm)
	1/2	67 dm <sup>3</sup> /s (142 scfm)
Operating temperature	-25°C to 65.5°C (-13°F to 150°F)	
Max. supply pressure	20 bar (300 psig)	
Adjusting range pressure	0-2 bar (30 psig) 0-4 bar (60 psig) 0-8 bar (125 psig) 0-17 bar (250 psig)	
Port size	BSPP / BSPT / NPT	1/4, 3/8, 1/2
Gauge port (2 ea.)	BSPP / BSPT / NPT	1/4
Weight	0.41 kg (0.90 lbs)	


\* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

## Material Specifications

Body	Aluminum	
Adjustment knob	Acetal	
Body cap	ABS	
Bonnet	33% Glass-filled nylon	
Diaphragm assembly	Nitrile / Zinc	
Bottom plug	33% Glass-filled nylon	
Valve assembly	Brass / Nitrile	
Springs	Main regulating valve	Steel S.S.
Seals	Nitrile	
Panel nut	Acetal	

## Dimensions mm (inches)

**NOTE:** 51 mm (2.00 in.) hole required for panel nut mounting.

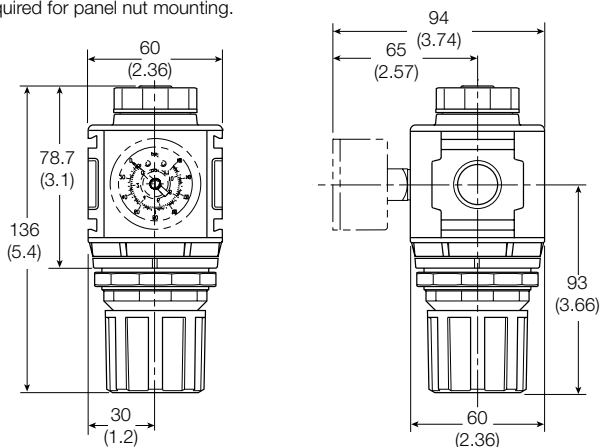


## Repair and Service Kits


Regulator repair kit - relieving	<b>P32KA00RB</b>
Regulator repair kit - non-relieving	<b>P32KA00RC</b>
Panel mount nut - aluminum	<b>P32KA00MM</b>
Panel mount nut - plastic	<b>P32KA00MP</b>
Angle bracket (uses panel mount threads)	<b>P32KA00MR</b>
T-bracket with body connector	<b>P32KA00MT</b>
T-bracket	<b>P32KA00MB</b>
Body connector	<b>P32KA00CB</b>

## Flow Charts


### 1/4 Regulator

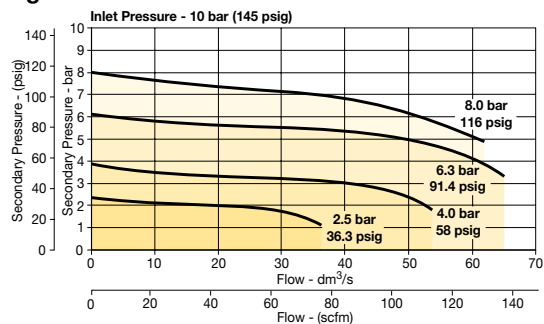

### 3/8 Regulator

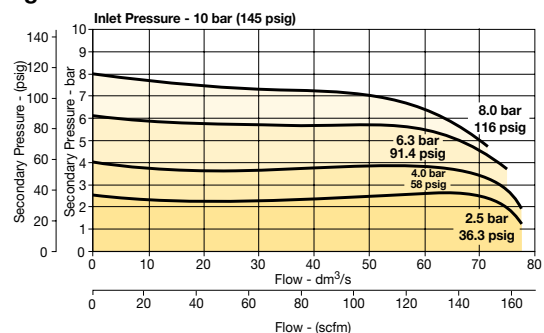

### 1/2 Regulator

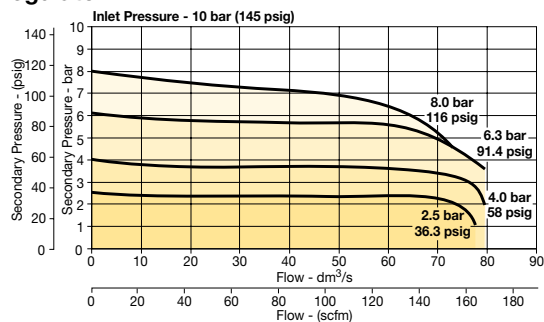

## Gauges

### 50mm (2") Round 1/4" center back mount

0-30 psig / 0-2 bar	<b>K4520N14030</b>
0-60 psig / 0-4 bar	<b>K4520N14060</b>
0-160 psig / 0-11 bar	<b>K4520N14160</b>
0-300 psig / 0-20 bar	<b>K4520N14300</b>


### Square flush mount gauge

0-4 bar	<b>K4511SCR04B</b>
0-10 bar	<b>K4511SCR11B</b>
0-60 psig	<b>K4511SCR060</b>
0-150 psig	<b>K4511SCR150</b>


For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

**Global Air Preparation System**


**Compact Common - P1 Regulator - P32**

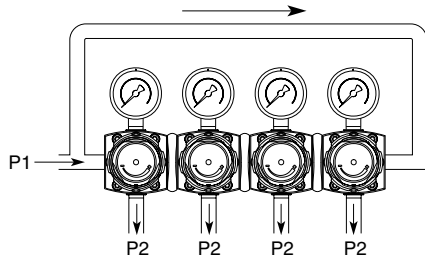

**Symbols**



Self relieving regulator with gauge



Non relieving regulator

- Manifold style regulator with line pressure on both sides.
- Pressure output is at front or rear.
- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- Robust construction
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Relieving & Non-relieving types
- Non-rising knob

**Options:**

<b>P32H</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>B</b>	<b>N</b>	<b>N</b>	<b>P</b>
<b>Basic series</b> Global modular compact regulator <b>P32H</b>	<b>Engr level</b> Current <b>A</b>	<b>Thread type</b> BSPP <b>1</b> BSPT <b>2</b> NPT <b>9</b>	<b>Port size</b> 1/4" <b>2</b> 3/8" <b>3</b> 1/2" <b>4</b>	<b>Relief</b> Relieving <b>B</b> Non-relieving <b>N</b>	<b>Mounting</b> <b>P</b> Plastic panel mount nut		
				<b>Adjustment range</b>			
				<b>Without gauge</b>			
				<b>Y</b> 2 bar; 30 psig; 0.2 MPa			
				<b>L</b> 4 bar; 60 psig; 0.4 MPa			
				<b>N</b> 8 bar; 125 psig; 0.8 MPa			
				<b>H</b> 17 bar; 250 psig; 1.7 MPa			

Order round gauges separately - see next page.

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) relieving	<b>P32HA92BNNP</b>	28 (59)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) relieving	<b>P32HA93BNNP</b>	28 (59)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)
1/2"	8 bar (125 psig) relieving	<b>P32HA94BNNP</b>	28 (59)	20 (300)	136 (5.4)	60 (2.36)	60 (2.36)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3 psig) set pressure and 1 bar (14.5 psig) pressure drop.

# Global Air Preparation System

## Specifications

Flow capacity*	1/4	28 dm <sup>3</sup> /s (59 scfm)
	3/8	28 dm <sup>3</sup> /s (59 scfm)
	1/2	28 dm <sup>3</sup> /s (59 scfm)
Operating temperature	-25°C to 65.5°C (-13°F to 150°F)	
Max. supply pressure	20 bar (300 psig)	
Adjusting range pressure	0-2 bar (30 psig) 0-4 bar (60 psig) 0-8 bar (125 psig) 0-17 bar (250 psig)	
Port size	BSPP / BSPT / NPT	1/4, 3/8, 1/2
Gauge port (2 ea.)	BSPP / BSPT / NPT	1/4
Weight	0.50 kg (1.10 lbs)	


\* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

## Material Specifications

Body	Zinc	
Adjustment knob	Acetal	
Body cap	ABS	
Bonnet	33% Glass-filled nylon	
Diaphragm assembly	Nitrile / Zinc	
Bottom plug	33% Glass-filled nylon	
Valve assembly	Brass / Nitrile	
Springs	Main regulating valve	Steel S.S.
Seals	Nitrile	
Panel nut	Acetal	

## Dimensions mm (inches)

**NOTE:** 51 mm (2.00 in.) hole required for panel nut mounting.

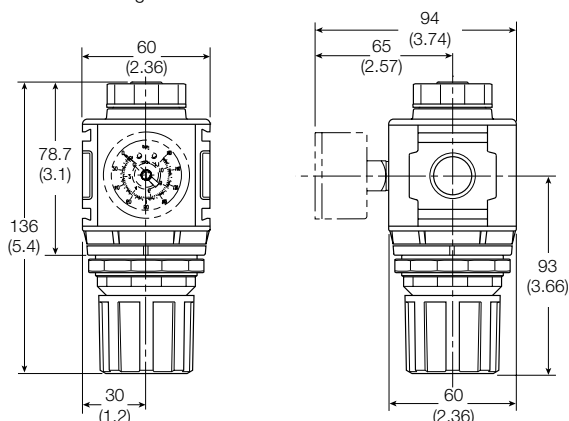

### WARNING


**Product rupture can cause serious injury.  
Do not connect regulator to bottled gas.  
Do not exceed Maximum primary pressure rating.**

### CAUTION:

**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

## Flow Charts

### P32 Common Port Regulator

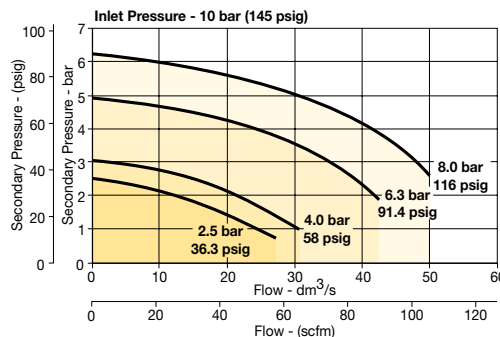

## Repair and Service Kits

Regulator repair kit - relieving	<b>P32KA00RB</b>
Regulator repair kit - non-relieving	<b>P32KA00RC</b>
Panel mount nut - aluminum	<b>P32KA00MM</b>
Panel mount nut - plastic	<b>P32KA00MP</b>
Angle bracket (uses panel mount threads)	<b>P32KA00MR</b>
T-bracket with body connector	<b>P32KA00MT</b>
T-bracket	<b>P32KA00MB</b>
Body connector	<b>P32KA00CB</b>

## Gauges

### Square flush mount gauge

0-4 bar	<b>K4511SCR04B</b>
0-10 bar	<b>K4511SCR11B</b>
0-60 psig	<b>K4511SCR060</b>
0-150 psig	<b>K4511SCR150</b>

### 50mm (2") Round 1/4" center back mount

0-30 psig / 0-2 bar	<b>K4520N14030</b>
0-60 psig / 0-4 bar	<b>K4520N14060</b>
0-160 psig / 0-11 bar	<b>K4520N14160</b>
0-300 psig / 0-20 bar	<b>K4520N14300</b>


For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

**Global Air Preparation System**


**Standard Regulator - P33**



**Symbols**



Self relieving regulator with gauge



Non relieving regulator

- Integral 1/2" or 3/4" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Relieving & Non-relieving types
- Non-rising knob

**Options:**

<b>P33R</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>B</b>	<b>N</b>	<b>N</b>	<b>P</b>
<b>Basic series</b> Global modular standard regulator P33R	<b>Engr level</b> Current A	<b>Thread type</b> BSPP 1 BSPT 2 NPT 9	<b>Port size</b> 1/2 4 3/4 6	<b>Relief</b> Relieving B Non-relieving N Reverse flow-relieving R			<b>Mounting</b> P Plastic panel mount nut
					<b>Adjustment range</b>		
					<b>With round gauge</b>		
					Z	2 bar; 30 psig; 0.2 MPa	
					M	4 bar; 60 psig; 0.4 MPa	
					G	8 bar; 125 psig; 0.8 MPa	
					J	17 bar; 250 psig; 1.7 MPa	
					<b>Without gauge</b>		
					Y	2 bar; 30 psig; 0.2 MPa	
					L	4 bar; 60 psig; 0.4 MPa	
					N	8 bar; 125 psig; 0.8 MPa	
					H	17 bar; 250 psig; 1.7 MPa	

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/2"	8 bar (125 psig) relieving	<b>P33RA94BNNP</b>	100 (212)	20 (300)	149 (5.9)	73 (2.9)	73 (2.9)
1/2"	8 bar (125 psig) relieving + gauge	<b>P33RA94BNGP</b>	100 (212)	20 (300)	149 (5.9)	73 (2.9)	73 (2.9)
3/4"	8 bar (125 psig) relieving	<b>P33RA96BNNP</b>	100 (212)	20 (300)	149 (5.9)	73 (2.9)	73 (2.9)
3/4"	8 bar (125 psig) relieving + gauge	<b>P33RA96BNGP</b>	100 (212)	20 (300)	149 (5.9)	73 (2.9)	73 (2.9)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3) psig set pressure and 1 bar (14.5 psig) pressure drop.

# Global Air Preparation System

## Specifications

Flow capacity*	1/2	100 dm <sup>3</sup> /s (212 scfm)
	3/4	100 dm <sup>3</sup> /s (212 scfm)
Operating temperature	-25°C to 65.5°C (-13°F to 150°F)	
Max. supply pressure	20 bar (300 psig)	
Adjusting range pressure	0-2 bar (30 psig) 0-4 bar (60 psig) 0-8 bar (125 psig) 0-17 bar (250 psig)	
Port size	BSP / BSPT / NPT	1/2, 3/4
Gauge port (2 ea.)	BSP / BSPT / NPT	1/4
Weight	0.62 kg (1.37 lbs)	


\* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

## Material Specifications

Body	Aluminum	
Adjustment knob	Acetal	
Body cap	ABS	
Bonnet	33% Glass-filled nylon	
Diaphragm assembly	Nitrile / Zinc	
Valve assembly	Brass / Nitrile / Acetal	
Springs	Main regulating valve	Steel S.S.
Seals	Nitrile	
Panel nut	Acetal	

## Dimensions mm (inches)

**NOTE:** 61 mm (2.40 in.) hole required for panel nut mounting.

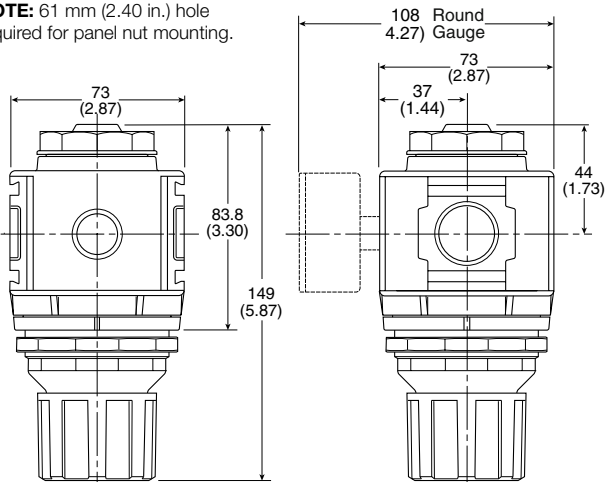

### WARNING


**Product rupture can cause serious injury. Do not connect regulator to bottled gas. Do not exceed Maximum primary pressure rating.**

### CAUTION:


**REGULATOR PRESSURE ADJUSTMENT** – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

## Flow Charts

### 1/2 Regulator

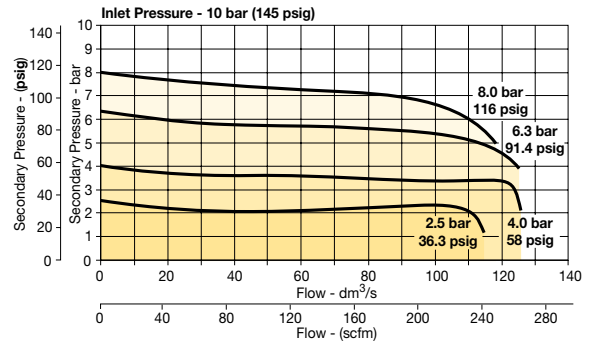

### 3/4 Regulator

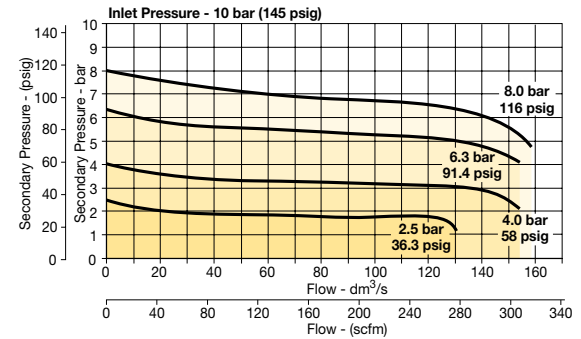

## Repair and Service Kits

Regulator repair kit - relieving	<b>P33KA00RB</b>
Regulator repair kit - non-relieving	<b>P33KA00RC</b>
Panel mount nut - aluminum	<b>P33KA00MM</b>
Panel mount nut - plastic	<b>P33KA00MP</b>
Angle bracket (uses panel mount threads)	<b>P33KA00MR</b>
T-bracket with body connector	<b>P32KA00MT</b>
T-bracket	<b>P32KA00MB</b>
Body connector	<b>P32KA00CB</b>

## Gauges

### 50mm (2") Round 1/4" center back mount

0-30 psig / 0-2 bar	<b>K4520N14030</b>
0-60 psig / 0-4 bar	<b>K4520N14060</b>
0-160 psig / 0-11 bar	<b>K4520N14160</b>
0-300 psig / 0-20 bar	<b>K4520N14300</b>


For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

**Global Air Preparation System**

**Mini Filter / Regulator - P31**



**Symbols**



- Integral 1/4" ports (NPT, BSPP & BSPT)
  - High efficiency 5 micron element as standard
  - Excellent water removal efficiency
  - Robust but lightweight aluminum construction
  - Positive bayonet latch to ensure correct & safe fitting
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation

**Options:**

<b>P31E</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>E</b>	<b>G</b>	<b>M</b>	<b>B</b>	<b>N</b>	<b>5</b>	<b>P</b>
<b>Basic series</b> Global modular mini filter / regulator P31E	<b>Engr level</b> Current A	<b>Thread type</b> BSPP 1 BSPT 2 NPT 9	<b>Element</b> 5µ Element E	<b>Port size</b> 1/4 2	<b>Bowl type</b> Poly bowl with bowl guard G Metal bowl without sight gauge M	<b>Drain type</b> B Pulse drain M Manual drain	<b>Relief</b> B Relieving N Non-relieving	<b>Mounting</b> P Plastic panel mount nut	<b>Adjustment range</b>	
								<b>With square gauge</b>		
								psig	bar	
								30* = 1	2* = V	
								60 = 3	4 = S	
								125 = 5	8 = T	
								<b>Without gauge†</b>		
								psig	bar	
								30 = Y	2 = Y	
								60 = L	4 = L	
								125 = N	8 = N	

\* Unit comes with 0-4 bar or 0-60 psig gauge respectively.  
† Order round gauges separately - see next page.

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) relieving - poly bowl - manual drain	<b>P31EA92EGMBN5P</b>	14 (30)	10 (150)	164.1 (6.46)	40 (1.58)	64 (2.53)
1/4"	8 bar (125 psig) relieving - poly bowl - pulse drain	<b>P31EA92EGBBN5P</b>	14 (30)	10 (150)	164.1 (6.46)	40 (1.58)	64 (2.53)
1/4"	8 bar (125 psig) relieving - metal bowl - manual drain	<b>P31EA92EMMBN5P</b>	14 (30)	17 (250)	164.1 (6.46)	40 (1.58)	64 (2.53)
1/4"	8 bar (125 psig) relieving - metal bowl - pulse drain	<b>P31EA92EMBBN5P</b>	14 (30)	17 (250)	164.1 (6.46)	40 (1.58)	64 (2.53)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3 psig) set pressure and 1 bar (14.5 psig) pressure drop.





**Global Air Preparation System**

**Specifications**

Flow capacity*	1/4	14 dm <sup>3</sup> /s (30.0 scfm)
Operating temperature†	Plastic bowl	-10°C to 52°C (14°F to 125°F)
	Metal bowl	-10°C to 65.5°C (14°F to 150°F)
Max. supply pressure	Plastic bowl	10 bar (150 psig)
	Metal bowl	17 bar (250 psig)
Standard filtration	5 micron	
Useful retention	12 cm <sup>3</sup> (0.4 US oz.)	
Adjusting range pressure	0-2 bar (30 psig)	
	0-4 bar (60 psig)	
	0-8 bar (125 psig)	
	0-17 bar (250 psig)	
Port size	BSPP / BSPT / NPT	1/4
Gauge port (2 ea.)**	BSPP / BSPT / NPT	1/8
Weight	0.19 kg (0.42 lbs)	

\* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).  
 \*\* Non-gauge option only.  
 † Units with square gauges: -15°C to 65.5°C (5°F to 150°F)


**Air quality:**

Within ISO 8573-1: 1991 Class 3 (Particulates)  
 Within ISO 8573-1: 2001 Class 6 (Particulates)

**⚠ WARNING**

**Product rupture can cause serious injury.  
 Do not connect regulator to bottled gas.  
 Do not exceed Maximum primary pressure rating.**


**Dimensions mm (inches)**

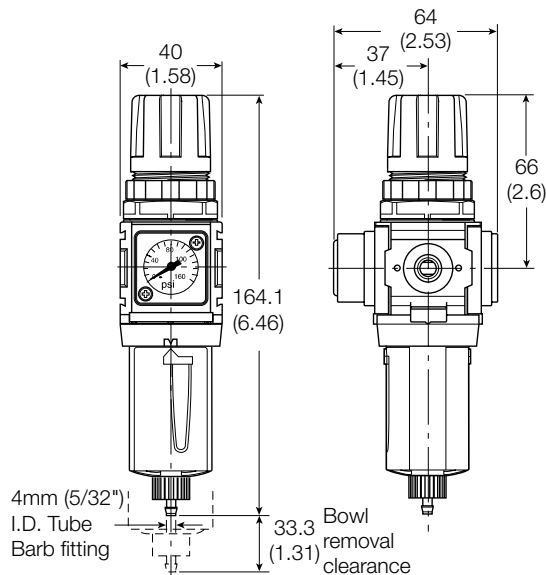

**Note:**  
 Flush-mounted gauge kits will not fit units originally purchased with threaded gauge ports.

**Flow Charts**

**1/4 Filter / Regulator**

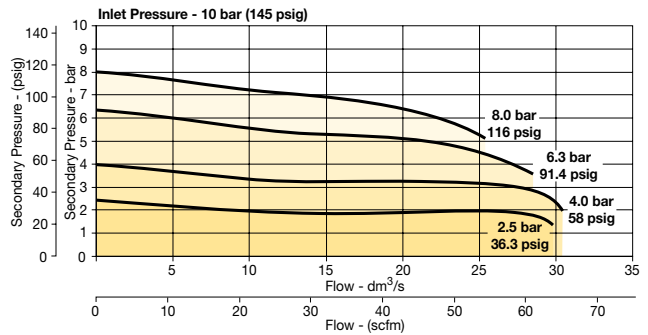

**Material Specifications**

Body	Aluminum	
Adjustment knob	Acetal	
Body cap	ABS	
Bonnet	PBT	
Bowl	Plastic bowl	Polycarbonate
	Metal bowl	Aluminum
Bowl guard	Nylon	
Filter element	Polyethylene	
Seals	Nitrile	
Springs	Steel	
Valve assembly	Brass / Nitrile	
Diaphragm assembly	Brass / Nitrile	
Panel nut	Acetal	

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

**Repair and Service Kits**

Plastic bowl / Bowl guard manual drain	<b>P31KA00BGM</b>
Metal bowl / w/o sight gauge manual drain	<b>P31KA00BMM</b>
Plastic bowl / Bowl guard pulse drain	<b>P31KA00BGB</b>
Metal bowl / w/o sight gauge pulse drain	<b>P31KA00BMB</b>
5µ particle filter element	<b>P31KA00ESE</b>
Regulator repair kit - relieving	<b>P31KA00RB</b>
Regulator repair kit - non-relieving	<b>P31KA00RC</b>
Panel mount nut - aluminum	<b>P31KA00MM</b>
Panel mount nut - plastic	<b>P31KA00MP</b>
Angle bracket (uses panel mount threads)	<b>P31KA00MR</b>
C-bracket (fits to body)	<b>P31KA00MW</b>
T-bracket with body connector	<b>P31KA00MT</b>
Body connector	<b>P31KA00CB</b>

**Gauges**

**Square flush mount gauge**

0-4 bar	<b>K4511SCR04B</b>
0-10 bar	<b>K4511SCR11B</b>
0-60 psig	<b>K4511SCR060</b>
0-150 psig	<b>K4511SCR150</b>

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.




**Global Air Preparation System**

**Compact Filter / Regulator - P32**



**Symbols**



- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- High efficiency 5 micron element as standard
- Excellent water removal efficiency
- Robust but lightweight aluminum construction
- Positive bayonet latch to ensure correct & safe fitting
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar, (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation

**Options:**

<b>P32E</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>E</b>	<b>G</b>	<b>M</b>	<b>B</b>	<b>N</b>	<b>N</b>	<b>P</b>
<b>Basic series</b> Global modular mini filter / regulator <b>P32E</b>	<b>Engr level</b> Current <b>A</b>	<b>Thread type</b> BSPP <b>1</b> BSPT <b>2</b> NPT <b>9</b>	<b>Element</b> 5µ Element <b>E</b>	<b>Port size</b> 1/4" <b>2</b> 3/8" <b>3</b> 1/2" <b>4</b>	<b>Drain type</b> M Manual drain A Auto drain	<b>Relief</b> B Relieving N Non-relieving	<b>Mounting</b> P Plastic panel mount nut	<b>Bowl type</b> Poly bowl with bowl guard <b>G</b> Metal bowl without sight gauge <b>M</b> Metal bowl with sight gauge <b>S</b>	<b>Adjustment range</b> <b>With round gauge</b> Z 2 bar; 30 psig; 0.2 MPa M 4 bar; 60 psig; 0.4 MPa G 8 bar; 125 psig; 0.8 MPa J* 17 bar; 250 psig; 1.7 MPa <b>Without gauge</b> Y 2 bar; 30 psig; 0.2 MPa L 4 bar; 60 psig; 0.4 MPa N 8 bar; 125 psig; 0.8 MPa H* 17 bar; 250 psig; 1.7 MPa	

\* Not available with poly bowl with bowl guard

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	8 bar (125 psig) relieving - poly bowl - manual drain	<b>P32EA92EGMBNGP</b>	42 (89)	10 (150)	254 (10.0)	60 (2.36)	60 (2.36)
1/4"	8 bar (125 psig) relieving - poly bowl - auto drain	<b>P32EA92EGABNGP</b>	42 (89)	10 (150)	248 (9.76)	60 (2.36)	60 (2.36)
1/4"	8 bar (125 psig) relieving - metal bowl - manual drain	<b>P32EA92ESMBNGP</b>	42 (89)	17 (250)	245 (9.66)	60 (2.36)	60 (2.36)
1/4"	8 bar (125 psig) relieving - metal bowl - auto drain	<b>P32EA92ESABNGP</b>	42 (89)	17 (250)	254 (10.0)	60 (2.36)	95 (3.74)
3/8"	8 bar (125 psig) relieving - poly bowl - manual drain	<b>P32EA93EGMBNGP</b>	58 (123)	10 (150)	254 (10.0)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) relieving - poly bowl - auto drain	<b>P32EA93EGABNGP</b>	58 (123)	10 (150)	248 (9.76)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) relieving - metal bowl - manual drain	<b>P32EA93ESMBNGP</b>	58 (123)	17 (250)	245 (9.66)	60 (2.36)	60 (2.36)
3/8"	8 bar (125 psig) relieving - metal bowl - auto drain	<b>P32EA93ESABNGP</b>	58 (123)	17 (250)	254 (10.0)	60 (2.36)	95 (3.74)
1/2"	8 bar (125 psig) relieving - poly bowl - manual drain	<b>P32EA94EGMBNGP</b>	64 (136)	10 (150)	245 (9.66)	60 (2.36)	95 (3.74)
1/2"	8 bar (125 psig) relieving - poly bowl - auto drain	<b>P32EA94EGABNGP</b>	64 (136)	10 (150)	248 (9.76)	60 (2.36)	95 (3.74)
1/2"	8 bar (125 psig) relieving - metal bowl - manual drain	<b>P32EA94ESMBNGP</b>	64 (136)	17 (250)	245 (9.66)	60 (2.36)	60 (2.36)
1/2"	8 bar (125 psig) relieving - metal bowl - auto drain	<b>P32EA94ESABNGP</b>	64 (136)	17 (250)	254 (10.0)	60 (2.36)	60 (2.36)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3 psig) set pressure and 1 bar (14.5 psig) pressure drop.



# Global Air Preparation System

## Specifications

Flow capacity*	1/4	42 dm <sup>3</sup> /s (89 scfm)
	3/8	58 dm <sup>3</sup> /s (123 scfm)
	1/2	64 dm <sup>3</sup> /s (136 scfm)
Operating temperature	Plastic bowl	-25°C to 52°C (-13°F to 125°F)
	Metal bowl	-25°C to 65.5°C (-13°F to 150°F)
Max. supply pressure	Plastic bowl	10 bar (150 psig)
	Metal bowl	17 bar (250 psig)
Standard filtration		5 micron
Useful retention†		51 cm <sup>3</sup> (1.7 US oz.)
Adjusting range pressure		0-2 bar (30 psig)
		0-4 bar (60 psig)
		0-8 bar (125 psig)
		0-17 bar (250 psig)
Port size	BSPP / BSPT / NPT	1/4, 3/8, 1/2
Gauge port (2 ea.)	BSPP / BSPT / NPT	1/4
Weight		0.53 kg (1.17 lbs)

\* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).  
 † Useful retention refers to volume below the quiet zone baffle.


### Air quality:

Within ISO 8573-1: 1991 Class 3 (Particulates)  
 Within ISO 8573-1: 2001 Class 6 (Particulates)

## Material Specifications

Body	Aluminum	
Adjustment knob	Acetal	
Body cap	ABS	
Element retainer / Baffle	Acetal	
Bowl	Plastic bowl	Polycarbonate
	Metal bowl	Zinc
Bowl guard	Nylon	
Filter element	Sintered polyethylene	
Seals	Nitrile	
Springs	Main regulating / valve	Steel / S.S.
Valve assembly	Brass / Nitrile	
Diaphragm assembly	Nitrile / Zinc	
Panel nut	Acetal	
Sight gauge	Metal bowl	Polycarbonate


## Dimensions mm (inches)

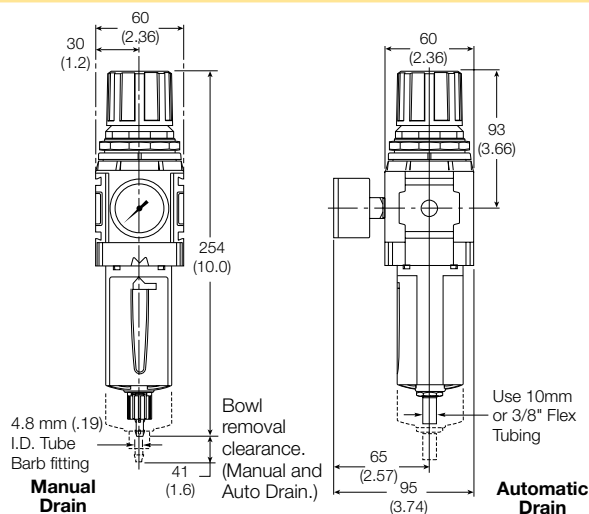


**WARNING**  
 Product rupture can cause serious injury.  
 Do not connect regulator to bottled gas.  
 Do not exceed Maximum primary pressure rating.

## Flow Charts


### 1/4 Filter / Regulator

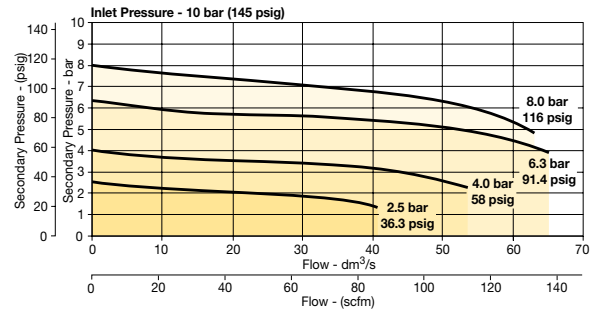

### 3/8 Filter/Regulator

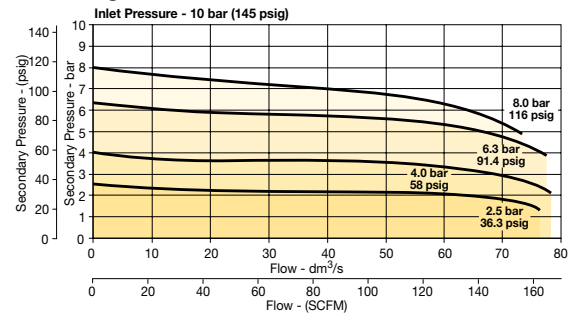

### 1/2 Filter/Regulator

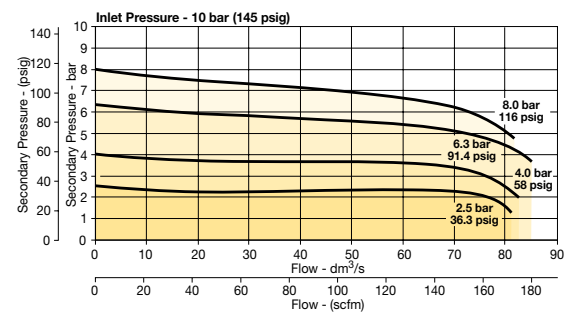

## Repair and Service Kits

Plastic bowl / Bowl guard manual drain	<b>P32KA00BGM</b>
Metal bowl / Sight gauge manual drain	<b>P32KA00BSM</b>
Auto drain	<b>P32KA00DA</b>
5µ particle filter element	<b>P32KA00ESE</b>
Regulator repair kit - relieving	<b>P32KA00RB</b>
Regulator repair kit - non-relieving	<b>P32KA00RC</b>
Panel mount nut - aluminum	<b>P32KA00MM</b>
Panel mount nut - plastic	<b>P32KA00MP</b>
Angle bracket (fits to panel mount threads)	<b>P32KA00MR</b>
T-bracket (fits to body connector)	<b>P32KA00MB</b>
T-bracket with body connector	<b>P32KA00MT</b>
Body connector	<b>P32KA00CB</b>

## Gauges

### 50mm (2") Round 1/4" center back mount

0-30 psig / 0-2 bar	<b>K4520N14030</b>
0-60 psig / 0-4 bar	<b>K4520N14060</b>
0-160 psig / 0-11 bar	<b>K4520N14160</b>
0-300 psig / 0-20 bar	<b>K4520N14300</b>

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.




**Global Air Preparation System**

**Standard Filter / Regulator - P33**



**Symbols**



- Integral 1/2" or 3/4" ports (NPT, BSPP & BSPT)
- High efficiency 5 micron element as standard
- Excellent water removal efficiency
- Robust but lightweight aluminum construction
- Positive bayonet latch to ensure correct & safe fitting
- Secondary pressure ranges 0-2 bar (0-30 psig), 0-4 bar (0-60 psig), 0-8 bar (0-125 psig), 0-17 bar (0-250 psig)
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation

**Options:**

<b>P33E</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>E</b>	<b>G</b>	<b>M</b>	<b>B</b>	<b>N</b>	<b>N</b>	<b>P</b>
<b>Basic series</b> Global modular standard filter / regulator P33E	<b>Engr level</b> Current A	<b>Thread type</b> BSPP 1 BSPT 2 NPT 9	<b>Element</b> 5µ Element E	<b>Port size</b> 1/2 4 3/4 6	<b>Bowl type</b> Poly bowl with bowl guard G Metal bowl without sight gauge M Metal bowl with sight gauge S	<b>Drain type</b> M Manual drain A Auto drain	<b>Relief</b> B Relieving N Non-relieving	<b>Adjustment range</b> <b>With round gauge</b> Z 2 bar; 30 psig; 0.2 MPa M 4 bar; 60 psig; 0.4 MPa G 8 bar; 125 psig; 0.8 MPa J* 17 bar; 250 psig; 1.7 MPa <b>Without gauge</b> Y 2 bar; 30 psig; 0.2 MPa L 4 bar; 60 psig; 0.4 MPa N 8 bar; 125 psig; 0.8 MPa H* 17 bar; 250 psig; 1.7 MPa	<b>Mounting</b> p Plastic panel mount nut	

**Bold items are most common.**

\* Not available with poly bowl with bowl guard

Port size	Description	Order code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/2"	8 bar (125 psig) relieving - poly bowl - manual drain	<b>P33EA94EGMBNGP</b>	90 (191)	10 (150)	291 (11.44)	73 (2.9)	73 (2.9)
1/2"	8 bar (125 psig) relieving - poly bowl - auto drain	<b>P33EA94EGABNGP</b>	90 (191)	10 (150)	285 (11.22)	73 (2.9)	73 (2.9)
1/2"	8 bar (125 psig) relieving - metal bowl - manual drain	<b>P33EA94ESMBNGP</b>	90 (191)	17 (250)	282 (11.0)	73 (2.9)	73 (2.9)
1/2"	8 bar (125 psig) relieving - metal bowl - auto drain	<b>P33EA94ESABNGP</b>	90 (191)	17 (250)	291 (11.44)	73 (2.9)	108 (4.27)
3/4"	8 bar (125 psig) relieving - poly bowl - manual drain	<b>P33EA96EGMBNGP</b>	98 (208)	10 (150)	282 (11.0)	73 (2.9)	108 (4.27)
3/4"	8 bar (125 psig) relieving - poly bowl - auto drain	<b>P33EA96EGABNGP</b>	98 (208)	10 (150)	285 (11.22)	73 (2.9)	108 (4.27)
3/4"	8 bar (125 psig) relieving - metal bowl - manual drain	<b>P33EA96ESMBNGP</b>	98 (208)	17 (250)	291 (11.44)	73 (2.9)	73 (2.9)
3/4"	8 bar (125 psig) Relieving - Metal bowl - Auto drain	<b>P33EA96ESABNGP</b>	98 (208)	17 (250)	282 (11.0)	73 (2.9)	73 (2.9)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 10 bar (145 psig) inlet pressure, 6.3 bar (91.3 psig) set pressure and 1 bar (14.5 psig) pressure drop.



# Global Air Preparation System

## Specifications

Flow capacity*	1/2	90 dm <sup>3</sup> /s (191 scfm)
	3/4	98 dm <sup>3</sup> /s (208 scfm)
Operating temperature	Plastic bowl	-25°C to 52°C (-13°F to 125°F)
	Metal bowl	-25°C to 65.5°C (-13°F to 150°F)
Supply pressure	Plastic bowl	10 bar (150 psig)
	Metal bowl	17 bar (250 psig)
Standard filtration	5 micron	
Useful retention†	85 cm <sup>3</sup> (2.8 US oz.)	
Adjusting range pressure	0-2 bar (30 psig)	
	0-4 bar (60 psig)	
	0-8 bar (125 psig)	
	0-17 bar (250 psig)	
Port size	BSP / BSPT / NPT	1/2, 3/4
Gauge port (2 ea.)	BSP / BSPT / NPT	1/4
Weight	0.85 kg (1.87 lbs)	

\* Inlet pressure 10 bar (145 psig). Secondary pressure 6.3 bar (91.3 psig).

† Useful retention refers to volume below the quiet zone baffle.

### Air quality:


Within ISO 8573-1: 1991 Class 3 (Particulates)

Within ISO 8573-1: 2001 Class 6 (Particulates)

## Material Specifications

Body	Aluminum	
Adjustment knob	Acetal	
Body cap	ABS	
Element retainer / Baffle	Acetal	
Bowls	Plastic bowl	Polycarbonate
	Metal bowl	Aluminum
Filter element	Sintered Polyethylene	
Seals	Nitrile	
Springs	Main regulating / Valve	Steel / S.S.
Valve assembly	Brass / Nitrile	
Diaphragm assembly	Nitrile / Zinc	
Panel nut	Acetal	
Sight gauge	Metal bowl	Polycarbonate

## Dimensions mm (inches)

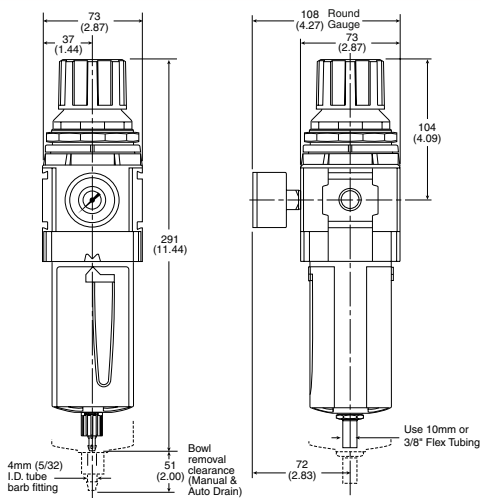

Manual Drain

Automatic Drain




### WARNING


Product rupture can cause serious injury.  
Do not connect regulator to bottled gas.  
Do not exceed Maximum primary pressure rating.

## Flow Charts

### 1/2 Filter / Regulator

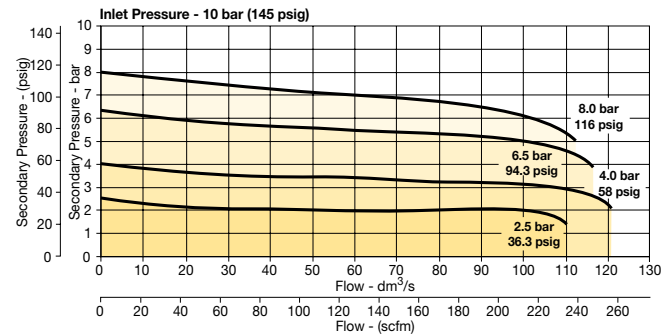

### 3/4 Filter/Regulator

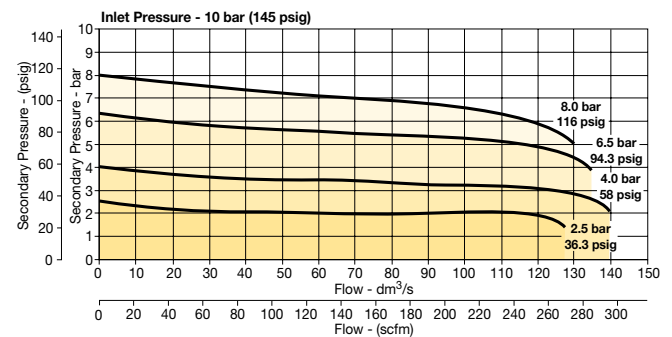

## Repair and Service Kits

Plastic bowl / Bowl guard manual drain	<b>P33KA00BGM</b>
Metal bowl / Sight gauge manual drain	<b>P33KA00BSM</b>
Auto drain	<b>P32KA00DA</b>
5µ particle filter element	<b>P33KA00ESE</b>
Regulator repair kit - Relieving	<b>P33KA00RB</b>
Regulator repair kit - Non-relieving	<b>P33KA00RC</b>
Panel mount nut - Aluminum	<b>P33KA00MM</b>
Panel mount nut - Plastic	<b>P33KA00MP</b>
Angle bracket (fits to panel mount threads)	<b>P33KA00MR</b>
T-bracket (fits to body connector)	<b>P32KA00MB</b>
T-bracket with body connector	<b>P32KA00MT</b>
Body connector	<b>P32KA00CB</b>

## Gauges

### 50mm (2") Round 1/4" center back mount

0-30 psig / 0-2 bar	<b>K4520N14030</b>
0-60 psig / 0-4 bar	<b>K4520N14060</b>
0-160 psig / 0-11 bar	<b>K4520N14160</b>
0-300 psig / 0-20 bar	<b>K4520N14300</b>

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.




**Global Air Preparation System**

**Mini Lubricator - P31**



**Symbol**



Lubricator with drain

- Integral 1/4" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Proportional oil delivery over a wide range of air flows
- Finger tip ratchet control for precise oil drip rate adjustment

**Options:**

<b>P31L</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>L</b>	<b>G</b>	<b>N</b>	<b>N</b>
<b>Basic series</b> Global modular mini lubricator <b>P31L</b>	<b>Engr level</b> Current <b>A</b>	<b>Thread type</b> BSPP 1 BSPT 2 NPT 9	<b>Port size</b> 1/4 2	<b>Lube type</b> Oil mist standard sight dome <b>L</b>		<b>Drain type</b> N No drain closed end	<b>Mounting</b> N No bracket
					<b>Bowl type</b> G Poly bowl with bowl guard M Metal bowl without sight gauge		

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - No drain	<b>P31LA92LGNN</b>	13 (28)	10 (150)	147.5 (5.80)	40 (1.58)	42.7 (1.68)
1/4"	Metal bowl - No drain	<b>P31LA92LMNN</b>	13 (28)	17 (250)	147.5 (5.80)	40 (1.58)	42.7 (1.68)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 bar (4.9 psig) pressure drop.

**Global Air Preparation System**

**Specifications**

Flow capacity*	1/4	13 dm <sup>3</sup> /s (28 scfm)
Operating temperature	Plastic bowl	-10°C to 52°C (14°F to 125°F)
	Metal bowl	-10°C to 65.5°C (14°F to 150°F)
Max. supply pressure	Plastic bowl	10 bar (150 psig)
	Metal bowl	17 bar (250 psig)
Useful retention		18 cm <sup>3</sup> (0.6 US oz.)
Port size	BSPP / BSPT / NPT	1/4
Weight		0.13 kg (0.29 lbs)


\* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).

**Material Specifications**


Body	Aluminum	
Body cap	ABS	
Bowl	Plastic bowl	Polycarbonate
	Metal bowl	Aluminum
Seals	Nitrile	
Sight dome	Polycarbonate	
Suggested lubricant	ISO / ASTM VG32	
Pick-up filter	Sintered bronze	

**Flow Charts**

**1/4 Lubricator**

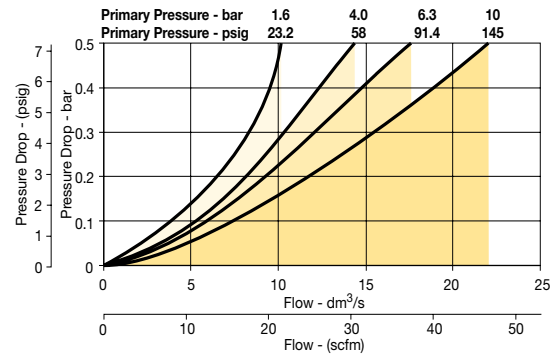

**Dimensions mm (inches)**

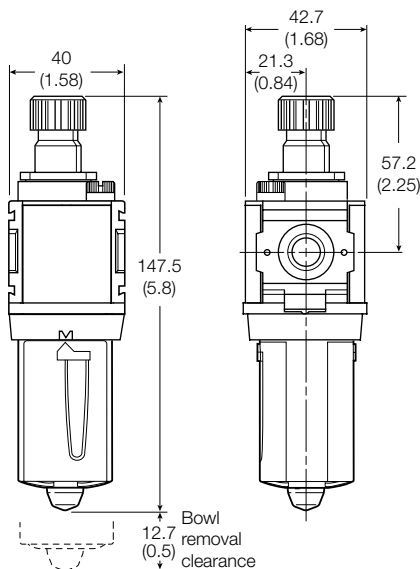

**Repair and Service Kits**

Plastic bowl / Bowl guard no drain	<b>P31KA00BGN</b>
Drip control assembly	<b>P32KA00PG</b>
Fill plug	<b>P31KA00PL</b>
C-bracket (fits to body)	<b>P31KA00MW</b>
T-bracket with body connector	<b>P31KA00MT</b>
Body connector	<b>P31KA00CB</b>


**Suggested Lubricant ..... F442 Oil**

Petroleum based oil of 100 to 200 SUS viscosity at 38°C (100°F) and an aniline point greater than 93°C (200°F)  
 (DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

**Global Air Preparation System**

**Compact Lubricator - P32**

**Symbol**



Lubricator with drain

- Integral 1/4", 3/8" or 1/2" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Proportional oil delivery over a wide range of air flows
- Finger tip ratchet control for precise oil drip rate adjustment
- Fill from top under system pressure

**Options:**

**P32L    A    9    2    L    G    N    N**

<b>Basic series</b> Global modular compact lubricator <b>P32L</b>	<b>Engr level</b> Current <b>A</b>	<b>Thread type</b> BSPP    1 BSPT    2 NPT    9	<b>Port size</b> 1/4    2 3/8    3 1/2    4	<b>Lube type</b> Oil mist standard sight dome <b>L</b>	<b>Drain type</b> N    No drain closed end	<b>Bowl type</b> <b>G</b> Poly bowl with bowl guard M    Metal bowl without sight gauge S    Metal bowl with sight gauge	<b>Mounting</b> N    No bracket
---	---------------------------------------	--	--	---	---	---	------------------------------------

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/4"	Poly bowl - No drain	<b>P32LA92LGNN</b>	18 (38)	10 (150)	211 (8.30)	60 (2.36)	60 (2.36)
1/4"	Metal bowl - No drain	<b>P32LA92LSNN</b>	18 (38)	17 (250)	211 (8.30)	60 (2.36)	60 (2.36)
3/8"	Poly bowl - No drain	<b>P32LA93LGNN</b>	32 (68)	10 (150)	211 (8.30)	60 (2.36)	60 (2.36)
3/8"	Metal bowl - No drain	<b>P32LA93LSNN</b>	32 (68)	17 (250)	211 (8.30)	60 (2.36)	60 (2.36)
1/2"	Poly bowl - No drain	<b>P32LA94LGNN</b>	47 (100)	10 (150)	211 (8.30)	60 (2.36)	60 (2.36)
1/2"	Metal bowl - No drain	<b>P32LA94LSNN</b>	47 (100)	17 (250)	211 (8.30)	60 (2.36)	60 (2.36)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 bar (4.9 psig) pressure drop.



**Global Air Preparation System**

**Specifications**


Flow capacity*	1/4	18 dm <sup>3</sup> /s (38 scfm)
	3/8	32 dm <sup>3</sup> /s (68 scfm)
	1/2	47 dm <sup>3</sup> /s (100 scfm)
Operating temperature	Plastic bowl	-10°C to 52°C (14°F to 125°F)
	Metal bowl	-10°C to 65.5°C (14°F to 150°F)
Max. supply pressure	Plastic bowl	10 bar (150 psig)
	Metal bowl	17 bar (250 psig)
Useful retention		121 cm <sup>3</sup> (4.09 US oz.)
Port size	BSPP / BSPT / NPT	1/4, 3/8, 1/2
Weight		0.31 kg (0.68 lbs)

\* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).

**Material Specifications**


Body	Aluminum	
Body cap	ABS	
Bowls	Plastic bowl	Polycarbonate
	Metal bowl	Aluminum
Seals	Nitrile	
Sight dome	Polycarbonate	
Sight gauge	Metal bowl	Polycarbonate
Suggested lubricant	ISO / ASTM VG32	
Pick-up filter	Sintered bronze	

**Dimensions mm (inches)**

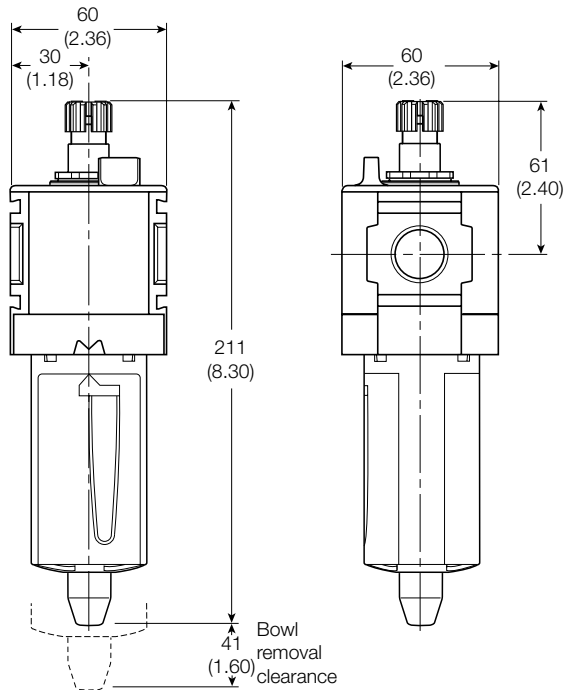


**Flow Charts**


**1/4 Lubricator**

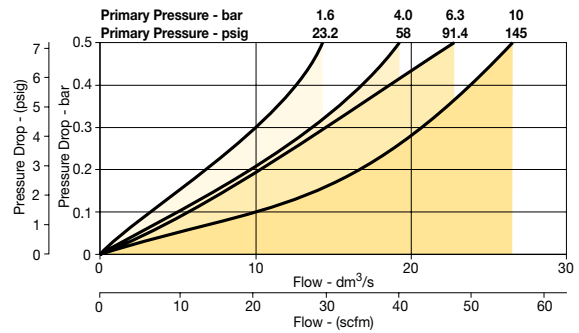

**3/8 Lubricator**

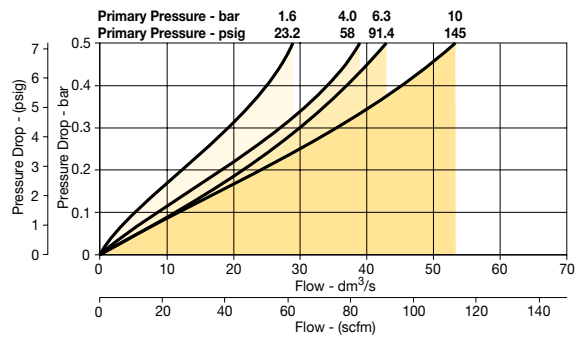

**1/2 Lubricator**

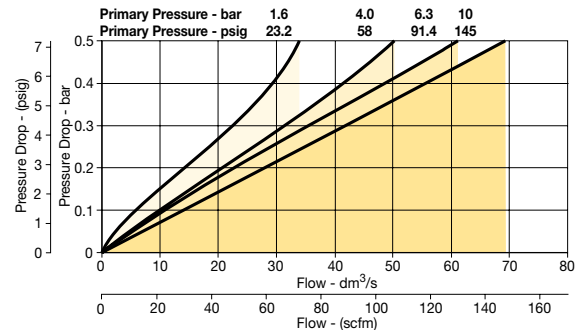

**Repair and Service Kits**

Plastic bowl / Bowl guard no drain	<b>P32KA00BGN</b>
Drip control assembly	<b>P32KA00PG</b>
Fill plug	<b>P32KA00PL</b>
L-bracket (fits to body)	<b>P32KA00ML</b>
T-bracket (fits to body connector)	<b>P32KA00MB</b>
T-bracket with body connector	<b>P32KA00MT</b>
Body connector	<b>P32KA00CB</b>

**Suggested Lubricant ..... F442 Oil**


Petroleum based oil of 100 to 200 SUS viscosity at 38°C (100°F) and an aniline point greater than 93°C (200°F)  
 (DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

**Global Air Preparation System**

**Standard Lubricator - P33**



**Symbol**



Lubricator with drain

- Integral 1/2" or 3/4" ports (NPT, BSPP & BSPT)
- Robust but lightweight aluminum construction
- Proportional oil delivery over a wide range of air flows
- Finger tip ratchet control for precise oil drip rate adjustment
- Fill from top under system pressure

**Options:**

<b>P33L</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>L</b>	<b>G</b>	<b>N</b>	<b>N</b>
<b>Basic series</b> Global modular standard lubricator P33LA	<b>Engr level</b> Current A	<b>Thread type</b> BSPP 1 BSPT 2 NPT 9	<b>Port size</b> 1/2 4 3/4 6	<b>Lube type</b> Oil mist standard sight dome L	<b>Drain type</b> N No drain closed end	<b>Bowl type</b> G Poly bowl with bowl guard M Metal bowl without sight gauge S Metal bowl with sight gauge	<b>Mounting</b> N No bracket

**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm <sup>3</sup> /s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)
1/2"	Poly bowl - No drain	<b>P33LA94LGNN</b>	48 (102)	10 (150)	234 (9.21)	73 (2.9)	73 (2.9)
1/2"	Metal bowl - No drain	<b>P33LA94LSNN</b>	48 (102)	17 (250)	234 (9.21)	73 (2.9)	73 (2.9)
3/4"	Poly bowl - No drain	<b>P33LA96LGNN</b>	68 (144)	10 (150)	234 (9.21)	73 (2.9)	73 (2.9)
3/4"	Metal bowl - No drain	<b>P33LA96LSNN</b>	68 (144)	17 (250)	234 (9.21)	73 (2.9)	73 (2.9)

† Standard part numbers shown in bold. For other models refer to Options chart above.

‡ Flow with 6.3 bar (91.3 psig) inlet pressure and 0.34 bar (4.9 psig) pressure drop.

# Global Air Preparation System

## Specifications


Flow capacity*	1/2	48 dm <sup>3</sup> /s (102 scfm)
	3/4	68 dm <sup>3</sup> /s (144 scfm)
Operating temperature	Plastic bowl	-10°C to 52°C (14°F to 125°F)
	Metal Bowl	-10°C to 65.5°C (14°F to 150°F)
Max. supply pressure	Plastic bowl	10 bar (150 psig)
	Metal bowl	17 bar (250 psig)
Useful retention		181 cm <sup>3</sup> (6.1 US oz.)
Port size	BSPP / BSPT / NPT	1/2, 3/4
Weight		0.47 kg (1.04 lbs)

\* Inlet pressure 6.3 bar (91.3 psig). Pressure drop 0.34 bar (4.9 psig).

## Material Specifications


Body	Aluminum	
Body cap	ABS	
Bowls	Plastic bowl	Polycarbonate
	Metal bowl	Aluminum
Seals	Nitrile	
Sight dome	Polycarbonate	
Sight gauge	Metal bowl	Polycarbonate
Suggested lubricant	ISO / ASTM VG32	
Pick-up filter	Sintered bronze	

## Dimensions mm (inches)

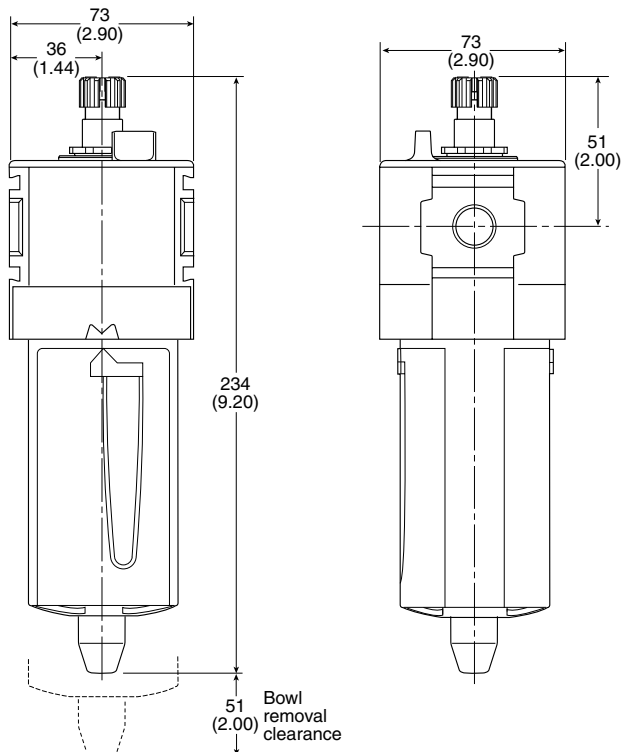


## Flow Charts

### 1/2 Lubricator

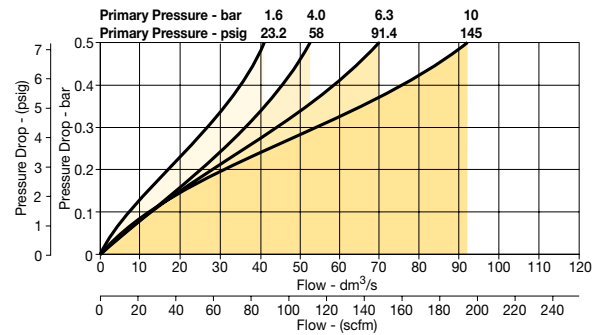

### 3/4 Lubricator

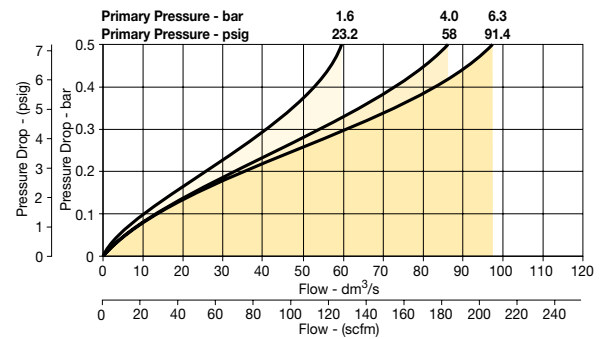

## Repair and Service Kits

Plastic bowl / Bowl guard no drain	<b>P33KA00BGN</b>
Drip control assembly	<b>P32KA00PG</b>
Fill plug	<b>P32KA00PL</b>
L-bracket (fits to body)	<b>P33KA00ML</b>
T-bracket (fits to body connector)	<b>P32KA00MB</b>
T-bracket with body connector	<b>P32KA00MT</b>
Body connector	<b>P32KA00CB</b>

### Suggested Lubricant ..... F442 Oil

Petroleum based oil of 100 to 200 SUS viscosity at 38°C (100°F) and an aniline point greater than 93°C (200°F) (DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

Global Air Preparation System

Proportional Regulators - P31P & P32P



P31P Series  
Bottom exhaust



P32P Series  
Bottom exhaust

- Very fast response times
- Accurate output pressure
- Micro parameter settings
- Selectable I/O parameters
- Quick, full flow exhaust
- LED display indicates output pressure
- No air consumption in steady state
- Multiple mounting options
- Protection to IP65
- P31P flows to 19 dm<sup>3</sup>/s (40 scfm)
- P32P flows to 57 dm<sup>3</sup>/s (120 scfm)

Options:

<b>P31P</b>	<b>A</b>	<b>9</b>	<b>2</b>	<b>A</b>	<b>D</b>	<b>2</b>	<b>V</b>	<b>D</b>	<b>1</b>	<b>A</b>
-------------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

Body size	<b>P31P</b>
Global modular mini (1/4")	P31P
Global modular compact (1/2")	P32P

Engr level	<b>A</b>
Current	A

Thread type	<b>1</b>
BSPP	1
BSPT	2
NPT	9

Port size	<b>2</b>
Global modular mini (1/4")	2
Global modular compact (1/2")	4

Version	<b>A</b>
Bottom ported exhaust (NC)	A
Bottom ported forced exhaust (NO) <sup>†</sup>	E

<sup>†</sup> When the supply voltage is lost the unit will automatically exhaust the regulated pressure to 0 bar (atmospheric pressure)

Power supply	<b>2</b>
24 volts	2

Control signal	<b>V</b>
0-10V <sup>‡</sup>	V

<sup>‡</sup> Factory setting is 0-10 V control signal. 4-20 mA control signal available via parameter 4 on keypad.

Pressure range	<b>Z</b>
0 - 2 bar (0-29 PSIG)	Z
0 - 10 bar (0-145 PSIG)	D

Input Connector	<b>1</b>
M12 (4-pin)	1

Output signal	<b>D</b>
Digital, PNP	D
PNP or 0-10V	P
NPN or 0-10V	N
4-20mA fixed	M


  

D) Digital PNP output only, no analog output selectable  
 P) Digital PNP and analogue 0-10V outputs selectable, by means of parameter 6. (Factory default 0-10V)  
 N) Digital NPN and analog 0-10 V outputs selectable by means of parameter 6. Factory default 0-10V)  
 M) Analog 4-20mA output only.  
 Note: On all analog outputs the F.S. value can be adjusted by means of parameter 8.


**Bold items are most common.**

P31P Mounting brackets

Order Code	Description
<b>P3HKA00ML</b>	L-Bracket mounting kit
<b>P3HKA00MC</b>	Foot bracket mounting kit




L-Bracket




Foot Bracket

P32P Mounting brackets

Order Code	Description
<b>P3KKA00ML</b>	L-Bracket mounting kit
<b>P3KKA00MC</b>	Foot bracket mounting kit



L-Bracket



Foot Bracket

Cables

Order Code	Description
<b>CB-M12-4P-2M</b>	2 mtr. cable with moulded straight M12x1 connector

**Global Air Preparation System**

**Technical Information**

**Working medium**

Compressed air or inert gasses, filtered to 40µ.

**Supply pressure**

Max. Operating Pressure:  
 2 bar unit: ..... 3 bar (43.5 psig)  
 10 bar unit: ..... 10.5 bar (152 psig)  
 Min. Operating Pressure ..... P2 Pressure + 0.5 bar (7.3 psig)

**Pressure control range**

Available in three pressure ranges, 0-2 bar (0-29 psig), 0-7 bar (0-101.5 psig) or 0-10 bar (0-145 psig). Pressure range can be changed through the software at all times. (parameter 19)

**Temperature range**

0°C up to +50°C (32°F up to 122°F)

**Weights:**

P31P = 0.291 kg (0.64 lbs)  
 P32P = 0.645 kg (1.42 lbs)

**Air consumption**

No consumption in stable regulated situation.

**Display**

The regulator is provided with a digital display, indicating the output pressure, either in bar or psig. The factory setting is as indicated on the label, can be changed through to software at all times (parameter 14)

**Supply voltage**

24 VDC +/- 10%

**Power consumption**

Max. 1.1W with unloaded signal outputs

**Control signals**

The electronic pressure regulator can be externally controlled through an analogue control signal of either 0-10V or 4-20mA. (parameter 4).

**Output signals**

As soon as the output pressure is within the signal band a signal is given of 24VDC, PNP Ri = 1 kOhm Outside the signal band this connection is 0V.


**Connections**

**(In case of output signal (Option D))**

Central M12 connector 4-pole  
 The electrical connections are as follows:

Pin No.	Function	Color	
1	24 V	Supply	Brown
2	0 to 10 V	Control Signal Ri = 100k Ω	White
	4 to 20mA	Control Signal Ri = 500 Ω	
3	0 V (GND)	Supply	Blue
4	24 V	Alarm Output Signal	Black

**Schematic**

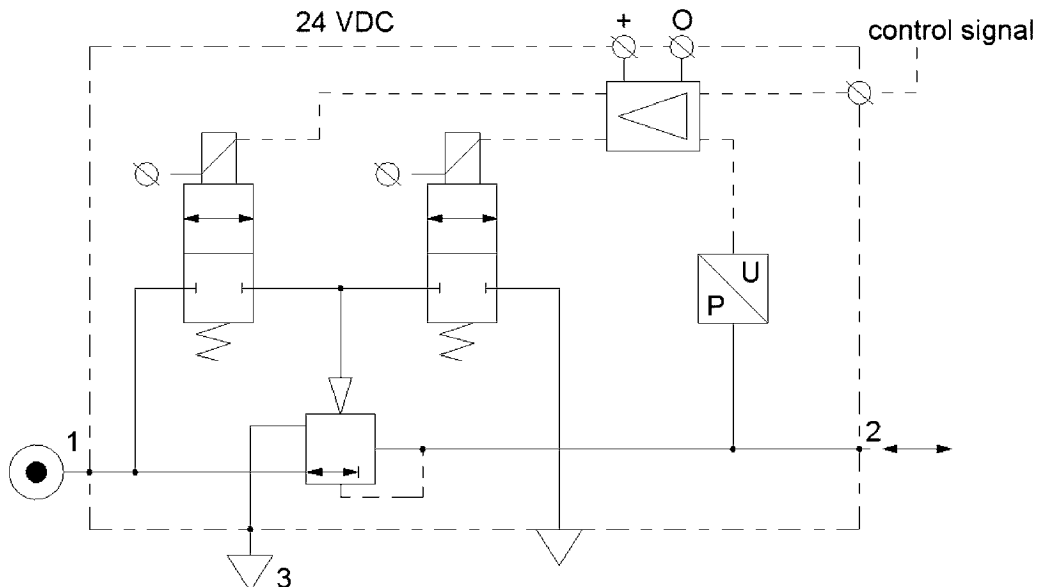

# Global Air Preparation System

## Technical information

### Dead band

The dead band is preset at 1.3% of Full Scale\*, adjustable via parameter 13.

### Accuracy

Linearity: = < 0.3% of Full Scale.\*

### Proportional band

The proportional band is preset at 10% of Full Scale.\*

### Fail safe operation

- If the P31P / P32P unit has an "O" or "A" in the 12th digit of the model number
  - When the supply voltage drops, the electronic control reverts to the fail safe mode. The last known output pressure is maintained at approximately the same level depending upon air consumption. The digital display indicates the last known pressure setting.
  - When the supply voltage is reinstated to the correct level, the valve moves from the fail safe mode and the output pressure immediately follows the control signal requirement. The display indicates the actual output pressure.
  - Note: In the event of loss of both power and inlet pressure the unit will exhaust downstream pressure.
- If the P31P / P32P unit has an "E" in the 12th digit of the model number
  - When the supply voltage drops, the electronic control reverts to "Forced Exhaust Mode" and will automatically exhaust the downstream (regulated) pressure.
  - When the supply voltage is reinstated to the correct level the unit will return to normal operation and follows the control signal requirement. The display indicates the actual pressure.
- If the unit has been programmed in manual mode (not with a control signal) the unit will EXHAUST and the regulator will need to be reset when power is applied.

### Full exhaust

Complete exhaust of the regulator is defined as  $P2 \leq 1\%$  Full Scale

### \* Full scale (F.S.)

For 2 bar (29 psig) versions this will be 2 bar (29 psig), for the 10 bar (145 psig) version full scale will be 10 bar (145 psig).

### Degree of protection

IP65

### EU conformity

CE: standard

EMC: according to directive 89/336/EEC

The new pressure regulator is in accordance with:

- EN 61000-6-1:2001**      **EN 61000-6-2:2001**
- EN 61000-6-3:2001**      **EN 61000-6-4:2001**

These standards ensure that this unit meets the highest level of EMC protection.

### Mounting position

Preferably vertical, with the cable gland on top.

### Materials: P31P & P32P

- Magnet Core ..... Steel
- Solenoid Valve Poppet ..... FPM
- Solenoid Valve Housing ..... Techno Polymer
- Regulator Body (P31P & P32P versions) ..... Aluminium
- Regulator Top Housing ..... Nylon
- Valve Head ..... Brass & NBR
- Remaining Seals ..... NBR

## Advanced functionality

### Pilot valve protection

When the required output pressure can not be achieved because of a lack of input pressure the unit will open fully and will display NoP. Approximately every 10 seconds the unit will retry. The output pressure will then be approximately equal to the inlet pressure. As soon as the input pressure is back on the required level, the normal control function follows.

### Safety exhaust

Should the **control signal** fall below 0.1 volts the valve will automatically dump downstream system pressure .

### Input protection

The unit has built-in protection against failure and burnout resulting from incorrect input value, typically:

The 24VDC supply is incorrectly connected to the setpoint input, the display will show 'OL', as an overload indication. The unit will need to be rewired and when correctly connected will operate normally.

The overload indicator 'OL' will also appear should the wrong input value be applied or the wrong input value be programmed: 4 - 20m instead of 0 - 10V. To correct this a different set point value should be input or the unit reprogrammed to correct the set point value acceptance. (via parameter 4).

Response time	P31P	P32P
2 to 4 bar	25 msecs	35 msecs
1 to 6 bar	55 msecs	135 msecs
4 to 2 bar	70 msecs	85 msecs
6 to 1 bar	80 msecs	225 msecs


To fill volume of:  
 100cm<sup>3</sup> - P31P  
 330cm<sup>3</sup> - P32P  
 connected to the outlet of the regulator.

### Settings


The regulator is pre-set at the factory. If required, adjustments can be made.

## Flow Charts

### P31P Regulator 1/4" Ports

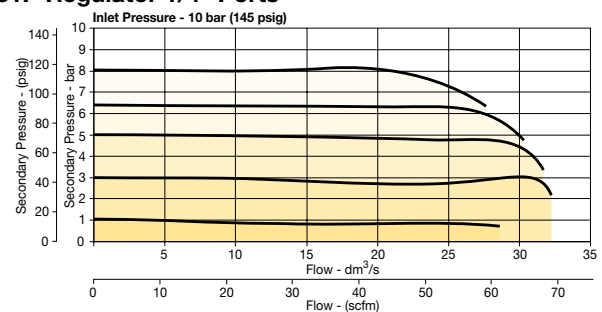

### P32P Regulator 1/2" Ports

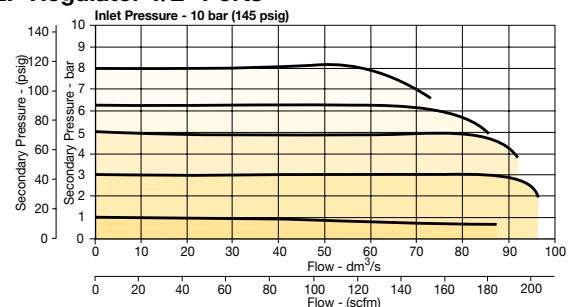

## Global Air Preparation System

### How to change parameters

Pressing the Accept key “acc” for more than 3 seconds, will activate parameter change mode. The user can then select the parameters by pressing up or down key. (display will show Pxx). When parameter number is correct, pressing accept again will enter parameter number.(display will show parameter value).

Pressing the up or down key will change the parameter itself. (display will flash indicating parameter editing mode). Pressing the accept key will accept the new parameter value. (all digits will flash whilst being accepted).

After releasing all keys , the next parameter number will be presented on the display. (you may step to the next parameter). When no key is pressed, after 3 seconds the display will show the actual output pressure.

When the unit is initially powered up allow approximately 10 seconds for the unit to “boot-up” before changing parameter settings.

Only parameter numbers 0, 4, 6, 8, 9, 14, 18, 19, 20, 12, 13 and 21 are accessible to edit. All other parameters are fixed.

#### Manual mode:

When keys DOWN and UP are pressed during startup, (connecting to the 24V power supply) manual mode is activated. This means that the user is able to in/decrease the output pressure of the regulator, by pressing the UP or DOWN key. During this action the display will blink, indicating that the manual mode is activated. After powering up again, the unit will revert back to normal mode.















### Back to Factory Setting

After start up. (Power is on)

Entering this value in parameter 0 will store the calibrated factory data into the working parameters.

(Default calibration data is used)















### Parameter Number 0 – Reset Back to Factory Settings

Step	1	2	3	4	5	
Press 	 3-6 seconds	 or 		 or 		
Until Display Reads			 Flashing Decimal	 Flashing Decimal	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 0.	Displays current parameter value.	Edits parameter. 3 = standard factory settings. If other than 3, use Up or Down Arrow and accept 3	Accepts and saves new parameter setting.	Sequences to next parameter.

### Set Control Signal

The unit is factory set for 0-10 V control signal. If 4-20 mA control signal is required, change parameter 4.

### Parameter Number 4 – Set Control Signal in Volts or Milliamps

Step	1	2	3	4	5	
Press 	 3-6 seconds	 or 		 or 		
Until Display Reads			 Flashing Decimal	 Flashing Decimal	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 4.	Displays current parameter value. 1 = V 0 = mA	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.













**Global Air Preparation System**

**Set Output Signal**

Parameter 6 is used to set the type of output signal to your PLC.  
This parameter is used as follows:

- Output Signal option “0” = Digital Output – PNP
  - Factory set at “0” Non Adjustable
- Output Signal option “P” = Digital PNP or Analog 1-10V
  - Factory set at “1” for Analog Signal
  - Convert to Digital PNP by changing parameter to “0” setting
- Output Signal option “N” = Digital NPN or Analog 1-10V
  - Factory set at “1” Analog Signal
  - Convert to Digital NPN by changing parameter to “0”
- Output Signal option “M” = Analog 4-20 mA
  - Factory set at “2” Non Adjustable













**Parameter Number 6 – Set Output Signal**

Step	1	2	3	4	5	
 Press 3-6 seconds						
Until Display Reads			 Flashing Decimal	 Flashing Decimal (Value 0, 1 or 2)	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 6.	Displays current parameter value. 1 = m factory default for P3H with analog options	Edits parameter. 0 = digital (NPN or PNP) 1 = analog 0..10V 2 = analog 4..20 mA	Accepts and saves new parameter setting.	Sequences to next parameter.

**Adjust Span Analog Output Signal**

Set value is a % of Full Analog range. As an example for a 0-10V output signal, the original factory setting of 100% will give you an adjustment of 0-10V. If you reset Parameter 8 to 50%, the new output range would be 0-5V or 50% of the full range. In the event that the output signal is to low, in a certain application, you can adjust it by increasing Parameter 8 to a maximum value of 130% of scale. Note that all values are nominal and that an actual measurement may be required to ensure signal strength.

**Parameter Number 8 – Adjust Span Analog Output Signal**

Step	1	2	3	4	5	
 Press 3-6 seconds						
Until Display Reads			 Flashing Decimal (For 2 bar versions value = 92)	 Flashing Decimal (Value between 0 and 130)	 Flashing	
Description	Accesses changeable parameters.	Accesses parameter no. 8.	Displays current parameter value.	Edits parameter.	Accepts and saves new parameter setting and implements the new analog signal span.	Sequences to next parameter.















**Global Air Preparation System**

**Adjust Digital Display**

If necessary, adjustments can be made to the digital display when using an external pressure sensor.













**Parameter Number 9 – Adjust Digital Display Value (Pressure Calibration)**

Step	1	2	3	4	5	
<b>Press</b> 	 3-6 seconds					
<b>Until Display Reads</b>			 Flashing Decimal	 Flashing Decimal	 Flashing	
<b>Description</b>	Accesses changeable parameters.	Accesses parameter no. 9.	Displays current digital display	Use up or down arrows and accept to adjust the display value if using an external pressure sensor.	Accepts and saves new parameter setting.	Sequences to next parameter.

**Set Pressure Scale**

Units with NPT port threads are supplied with a factory set psig pressure scale. Use parameter 14 to change scale to bar.

**Parameter Number 14 – Set Pressure Scale in psig or bar**













Step	1	2	3	4	5	
<b>Press</b> 	 3-6 seconds					
<b>Until Display Reads</b>			 Flashing Decimal	 Flashing Decimal	 Flashing	
<b>Description</b>	Accesses changeable parameters.	Accesses parameter no. 14.	Displays current parameter value. 1 = psig 0 = bar 2 = MPA	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.

**Global Air Preparation System**

**Preset Minimum Pressure**

If there is a need for a pre-set Minimum pressure, use parameter 18. (Note: preset pressure is affected by % P19.)

**Parameter Number 18 – Set Minimum Preset Pressure**

Step	1	2	3	4	5	
<b>Press</b> 	 3-6 seconds					
<b>Until Display Reads</b>			 Flashing Decimal	 Flashing Decimal (value between 0 and 200)	 Flashing	
<b>Description</b>	Accesses changeable parameters.	Accesses parameter no. 18.	Displays current parameter value. Incremental value is: <u>2 bar unit:</u> x 2 mbar x % P19  <u>10 bar unit:</u> x 10 mbar x % P19	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.

**Set Pressure Correction**













Pressure correction allows the user to set a Maximum pressure as a percentage of secondary pressure F.S.

Example: If F.S. is 10 bar, set parameter 19 to 50 for Maximum preset pressure of 5 bar.

Pressure correction also affects the Minimum preset pressure in parameter 18.

Example: If F.S. is 10 bar and parameter 18 is set to a value of 100 (1 bar), and parameter 19 is set to 50%, then the actual Minimum preset pressure seen is 0.5 bar.

**Parameter Number 19 – Set Maximum Preset Pressure**

Step	1	2	3	4	5	
<b>Press</b> 	 3-6 seconds					
<b>Until Display Reads</b>			 Flashing Decimal	 Flashing Decimal (value between 0 and 100)	 Flashing	
<b>Description</b>	Accesses changeable parameters.	Accesses parameter no. 19.	Displays current parameter value. Incremental value is: % of F.S.	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.













**Global Air Preparation System**

**Behavior Control**

The regulation speed of the pressure regulator can be modified by means of one parameter. (P 20)

The value in this parameter has a range from 0-5. A higher value indicates slower regulation speed, but will be more stable.

**Parameter Number 20 – Set Behavior Control**

Step	1	2	3	4	5	
<b>Press</b> 	 3-6 seconds					
<b>Until Display Reads</b>			 Flashing Decimal	 Flashing Decimal (value between 0 and 5)	 Flashing	
<b>Description</b>	Accesses changeable parameters.	Accesses parameter no. 20.	Displays current parameter value.	Edits parameter 0 = custom set* 1 = fastest (narrow proportional band) 2 = fast 3 = normal 4 = slow 5 = slowest (proportional band is broad)	Accepts and saves new parameter setting.	Sequences to next parameter.













\* When the value 0 is entered, you are able to create your own custom settings true parameters 12, 13 and 21.

**Fine Settings**

**Set Proportional Band**

Proportional band is used for setting the reaction sensitivity of the regulator. The displayed value is X 10 mbar and has a range between 50 (0.5 bar) and 250 (2.5 bar).

**Parameter Number 12 – Set Proportional Band (P20 Must be Set to 0)**













Step	1	2	3	4	5	
<b>Press</b> 	 3-6 seconds					
<b>Until Display Reads</b>			 Flashing Decimal	 Flashing Decimal (value between 50 and 250)	 Flashing	
<b>Description</b>	Accesses changeable parameters.	Accesses parameter no. 12.	Displays current parameter value. Incremental value is: x 10 mbar	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.

**Global Air Preparation System**

**Set Deadband**













Deadband is the Minimum limit of accuracy at which the regulator is set for normal operation. The displayed value is X 10 mbar and has a range between 4 (40 mbar) and 40 (400 mbar).

**Parameter Number 13 – Set Deadband (P20 Must be Set to 0)**








Step	1	2	3	4	5	
<b>Press</b> 	 3-6 seconds					
<b>Until Display Reads</b>			 Flashing Decimal	 Flashing Decimal (value between 4 and 40)	 Flashing	
<b>Description</b>	Accesses changeable parameters.	Accesses parameter no. 13.	Displays current parameter value. Incremental value is x 10 mbar	Edits parameter.	Accepts and saves new parameter setting.	Sequences to next parameter.

**Proportional Effect**


**Parameter Number 21 – Set Proportional Effect (P20 Must be Set to 0)**

Step	1	2	3	4	5	
<b>Press</b> 	 3-6 seconds					
<b>Until Display Reads</b>			 Flashing Decimal	 Flashing Decimal (value between 5 and 100)	 Flashing	
<b>Description</b>	Accesses changeable parameters.	Accesses parameter no. 21.	Displays current parameter value.	Edits parameter. 5 = fastest regulation 100 = slowest regulation.	Accepts and saves new parameter setting.	Sequences to next parameter.


**Parameter Number 39 – Displays Current Software Version**

Step	1	2	3	
<b>Press</b> 	 3-6 seconds			
<b>Until Display Reads</b>			 Flashing Decimal	
<b>Description</b>	Accesses changeable parameters.	Accesses parameter no. 39.	Displays current parameter value. XXX = current software version	


**P31P**

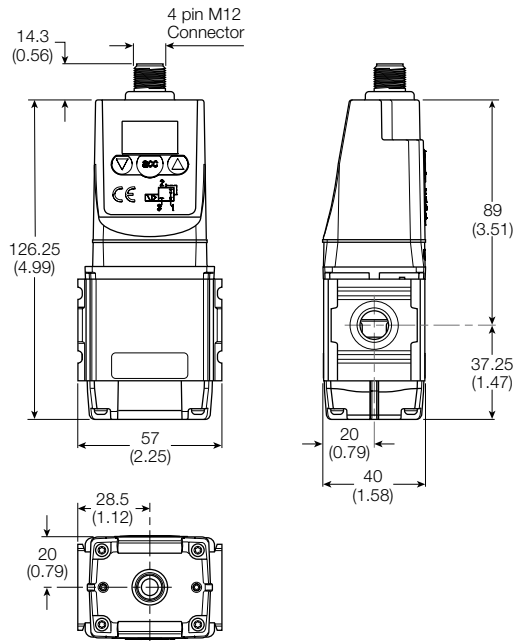


**P32P**

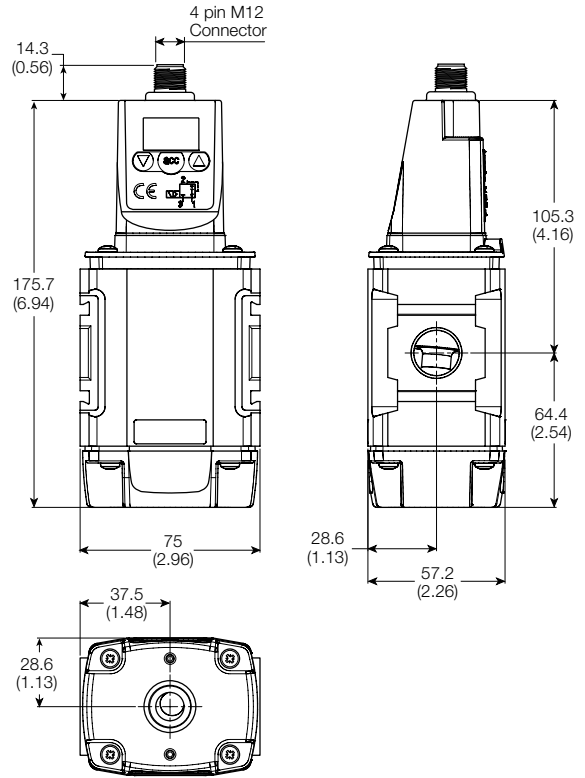


**L-Bracket**

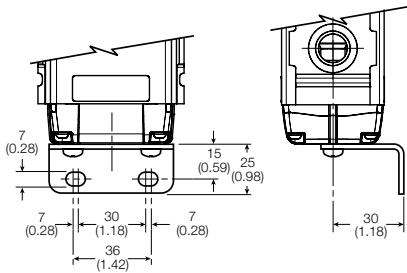


**L-Bracket**

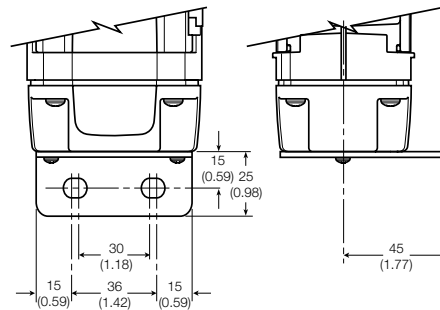

**Foot Bracket**

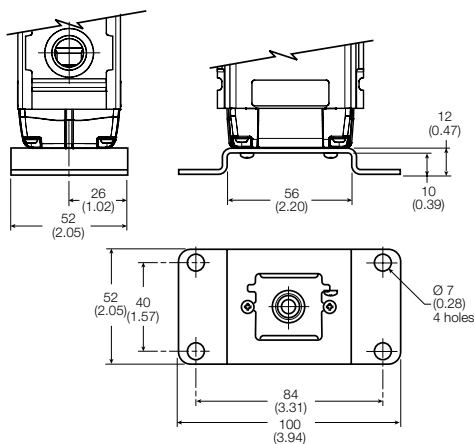

**Foot Bracket**

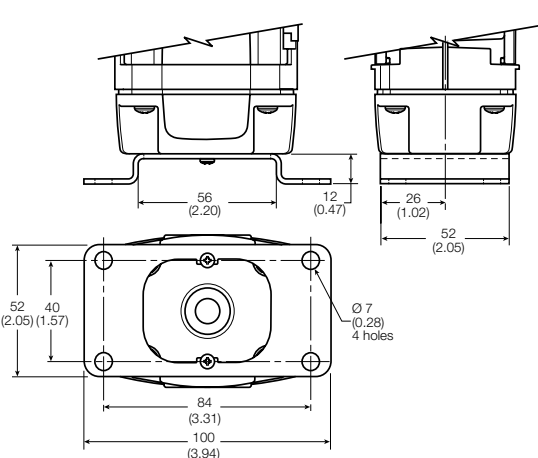

Dimensions are in mm (Inches)




**Global Air Preparation System**

**Combined Soft Start / Dump Valve**



**Symbol**



- Modular design with 1/4" or 1/2" integral ports (NPT, BSPP & BSPT)
- Provides for the safe introduction of pressure
- The 3-way, 2-position function automatically dumps downstream pressure on the loss of pilot signal
- Adjustable slow start
- Solenoid or air pilot options
- High flow & exhaust capability
- Silencer included

Parker Global Series Combined Soft Start / Dump Valves, provide for the safe introduction of pressure to machines or systems. Soft Start / Dump Valves when set, allow the pressure to gradually build to the set point before fully opening to deliver full flow at line pressure.

The controlled introduction of pressure can be an important safety factor and prevent damage to tooling when air pressure is introduced at machine or system start up.

To maintain these units in the open position a pilot supply to the air pilot operated version or an electrical signal to the solenoid operated version must be maintained. The valve will automatically dump when the holding signal is removed.

**Options:**

<b>P31T</b>		<b>A</b>	<b>9</b>	<b>2</b>	<b>S</b>	<b>G</b>	<b>N</b>	<b>Solenoid type only</b>	
<b>Body size</b>		<b>Engr level</b>				<b>Actuator interface</b>		<b>Solenoid voltage</b>	
Soft start / dump valve (1/4")	<b>P31T</b>	Current	<b>A</b>			<b>G</b> 15mm solenoid (P31 only)		<b>2CN</b> 24VDC non locking manual override	
Soft start / dump valve (1/2")	<b>P32T</b>					<b>C</b> 30mm solenoid		<b>3GN</b> 120VAC non locking manual override	
		<b>Thread type</b>				<b>P</b> Threaded air pilot		<b>1FN</b> 120VAC non locking manual override (P31 series only)	
		<b>BSPP</b> 1			<b>Pilot type</b>			<b>Solenoid type</b>	
		<b>BSPT</b> 2			<b>P</b> External air pilot			<b>C</b> 15mm (P31 series only)	
		<b>NPT</b> 9			<b>S</b> Solenoid pilot			<b>A</b> 30mm CNOMO coil (P32 only)	
								<b>D</b> 30mm CNOMO coil (M12 connection) (P32 only)	
		<b>Port size</b>							
		Global modular mini (1/4")	<b>2</b>						
		Global modular compact (1/2")	<b>4</b>						

Note: P32 unit used for both P32 & P33 series  
**Bold items are most common.**

Port size	Description	Order code†	Flow‡ dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)	Weight
1/4"	120VAC Solenoid & cable plug	<b>P31TA92SGNC1FN</b>	17 (36)	10 (150)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/4"	24VDC Solenoid & cable plug	<b>P31TA92SGNC2CN</b>	17 (36)	10 (150)	166‡ (6.5)	57 (2.2)	40 (1.5)	0.41kg (0.9lbs)
1/4"	External air pilot operated	<b>P31TA92PPN</b>	17 (36)	17 (250)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/2"	120VAC 30mm coil & cable plug included	<b>P32TA94SCNA3GN</b>	46 (97)	10 (150)	162.5‡ (6.3)	88 (3.4)	57.2 (2.2)	0.87kg (1.9lbs)
1/2"	24VDC 30mm coil & cable plug included	<b>P32TA94SCNA2CN</b>	46 (97)	10 (150)	227.5‡ (8.9)	88 (3.4)	57.2 (2.2)	0.91kg (2.0lbs)
1/2"	External air pilot operated	<b>P32TA94PPN</b>	46 (97)	17 (250)	162.5‡ (6.3)	75 (2.9)	57.2 (2.2)	0.87kg (1.9lbs)

‡ Includes exhaust silencer. Flow with 6.3 bar (91.3 psig) inlet and 1 bar (14.5 psig) pressure drop.  
 † Standard part numbers shown in bold. For other models refer to Options chart above.



# Global Air Preparation System

## Technical Information

Fluid:	Compressed air	
Max. pressure solenoid operated:	10 bar (150 psig)	
Max. pressure air pilot operated:	17 bar (250 psig)	
Min. operating pressure:	3 bar (44 psig)	
Temperature Max.* solenoid operated:	-10°C to 50°C (14°F to 122°F)	
Temperature Max.* air pilot operated:	-20°C to 80°C (-4°F to 176°F)	
Air pilot port:	1/8"	
Exhaust port:	<b>P31T</b> - 1/4" / <b>P32T</b> - 1/2"	
Typical flow with 6.3 bar inlet pressure and 1 bar pressure drop:	<b>P31T</b>	17 dm <sup>3</sup> /s (36 scfm)
	<b>P32T</b>	48 dm <sup>3</sup> /s (101 scfm)

\* Air supply must be dry enough to avoid ice formation at temperatures below +2°C  
Snap pressure: Full flow when downstream pressure reaches 50% of the inlet pressure

## Material Specifications

Body:	Aluminum
Body cover:	Polyester
Seals:	Nitrile NBR

## Mounting Brackets


Description	Order code
	<b>P31T</b>
L-bracket mounting kit	<b>P3HKA00ML</b>
Foot bracket mounting kit	<b>P3HKA00MC</b>

### Note:


For solenoid operators and cable plugs (connectors) see pages 68 to 69.

## Dimensions mm (inches)

### P31T

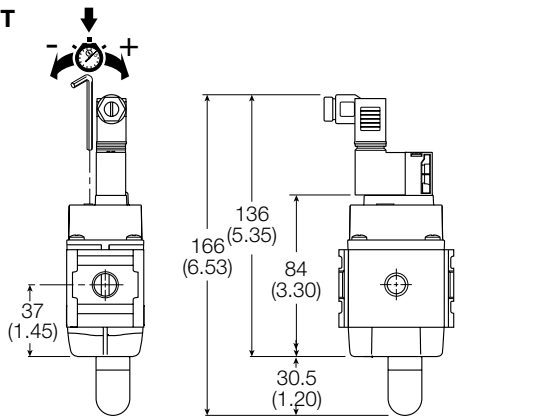


### Soft Start Function:

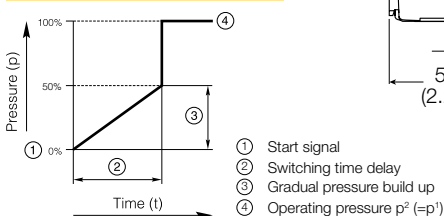


## Flow Charts


### 1/4 Soft Start & Dump Valve

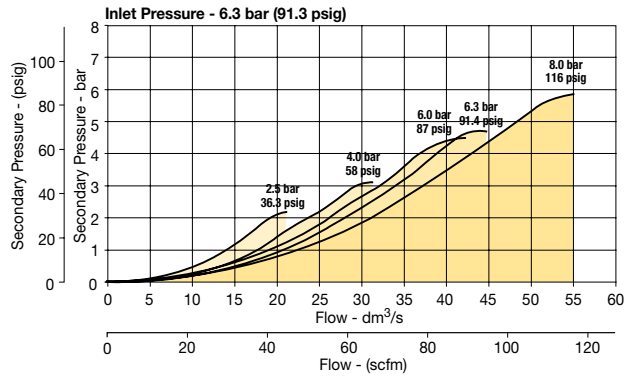

### 1/2 Soft Start & Dump Valve

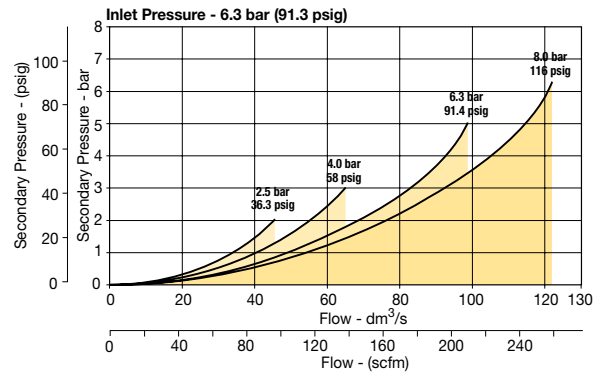


### P32T

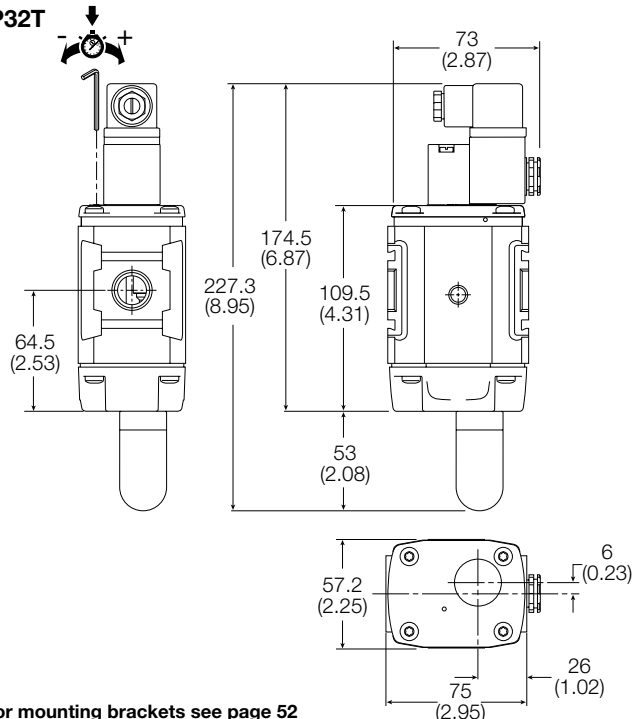


For mounting brackets see page 52

**Global Air Preparation System**

**Dump Valve**

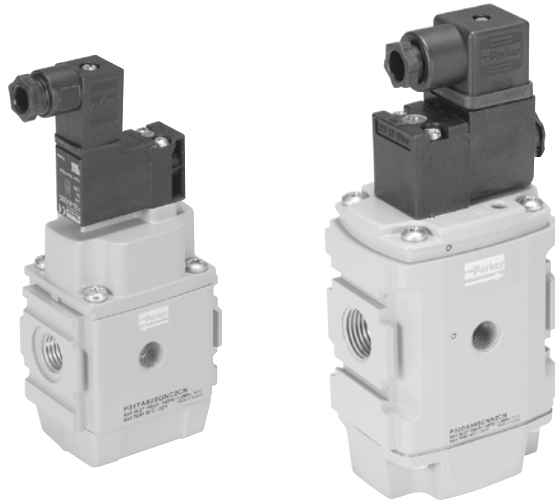

**Symbol**



- Modular design with 1/4" or 1/2" integral ports (NPT, BSPP & BSPT)
- The 3-way, 2-position function automatically dumps downstream pressure on the loss of pilot signal
- Solenoid or air pilot options
- High flow & exhaust capability
- Silencer included

Remotely operated dump valves automatically shut off upstream pressure and exhaust the downstream pressure when the pilot pressure is released.

To maintain these units in the open position a pilot supply to the air pilot operated version or an electrical signal to the solenoid operated version must be maintained. The valve will automatically dump when the holding signal is removed.

**Options:**

<b>P31D</b>		<b>A</b>	<b>9</b>	<b>2</b>	<b>S</b>	<b>G</b>	<b>N</b>	<b>Solenoid type only</b>	
<b>C</b>		<b>2CN</b>							
<b>Body size</b>		<b>Engr level</b>		<b>Thread type</b>		<b>Actuator interface</b>		<b>Solenoid voltage</b>	
Dump valve (1/4") P31D		Current A		BSPP 1		G 15mm solenoid (P31 only)		2CN 24VDC non locking manual override	
Dump valve (1/2") P32D				BSPT 2		C 30mm solenoid		3GN 120VAC non locking manual override	
				NPT 9				1FN 120VAC non locking manual override (P31 series only)	
						<b>Pilot type</b>		<b>Solenoid type</b>	
						P External air pilot		C 15mm (P31 series only)	
						S Solenoid pilot		A 30mm CNOMO coil (P32 only)	
								D 30mm CNOMO coil (M12 connection) (P32 only)	
<b>Note:</b>		<b>Port size</b>							
P32 unit used for both P32 & P33 series		Global modular mini (1/4") 2							
Bold items are most common.		Global modular compact (1/2") 4							

Port size	Description	Order code†	Flow dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)	Weight
1/4"	120VAC Solenoid & cable plug	<b>P31DA92SGNC1FN</b>	17 (36)	10 (150)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/4"	24VDC Solenoid & cable plug	<b>P31DA92SGNC2CN</b>	17 (36)	10 (150)	166+ (6.5)	57 (2.2)	40 (1.5)	0.41kg (0.9lbs)
1/4"	External air pilot operated	<b>P31DA92PPN</b>	17 (36)	17 (250)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/2"	120VAC 30mm coil & cable plug included	<b>P32DA94SCNA3GN</b>	51 (108)	10 (150)	162.5+ (6.3)	75 (2.9)	57.2 (2.2)	0.69kg (1.5lbs)
1/2"	24VDC 30mm coil & cable plug included	<b>P32DA94SCNA2CN</b>	51 (108)	10 (150)	227.5+ (8.9)	75 (2.9)	57.2 (2.2)	0.91kg (2.0lbs)
1/2"	External air pilot operated	<b>P32DA94PPN</b>	51 (108)	17 (250)	162.5+ (6.3)	75 (2.9)	57.2 (2.2)	0.87kg (1.9lbs)

‡ Includes exhaust silencer

† Standard part numbers shown in bold. For other models refer to Options chart above.





**Global Air Preparation System**

**Technical Information**

Fluid:	Compressed air	
Max. pressure solenoid operated:	10 bar (150 psig)	
Max. pressure air pilot operated:	17 bar (250 psig)	
Min. operating pressure:	3 bar (44 psig)	
Temperature Max.* solenoid operated:	-10°C to 50°C (14°F to 122°F)	
Temperature Max.* air pilot operated:	-20°C to 80°C (-4°F to 176°F)	
Air pilot port:	1/8"	
Exhaust port:	<b>P31D</b> - 1/4" / <b>P32D</b> - 1/2"	
Typical flow with 6.3 bar inlet pressure and 1 bar pressure drop:	<b>P31D</b>	17 dm <sup>3</sup> /s (36 scfm)
	<b>P32D</b>	51 dm <sup>3</sup> /s (108 scfm)

\* Air supply must be dry enough to avoid ice formation at temperatures below +2°C  
Snap pressure: Full flow when downstream pressure reaches 50% of the inlet pressure

**Material Specifications**

Body:	Aluminum
Body cover:	Polyester
Seals:	Nitrile NBR

**Mounting Brackets**


Description	Order code
	<b>P31D</b>
L-bracket mounting kit	<b>P3HKA00ML</b>
Foot bracket mounting kit	<b>P3HKA00MC</b>

**Note:**

For solenoid operators and cable plugs (connectors) see pages 68 to 69.


**Dimensions mm (inches)**

**P31D**

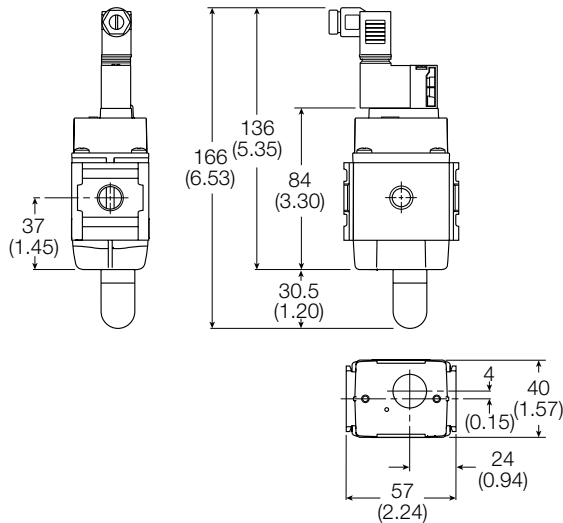


**Flow Charts**


**1/4 Remote Dump Valve**

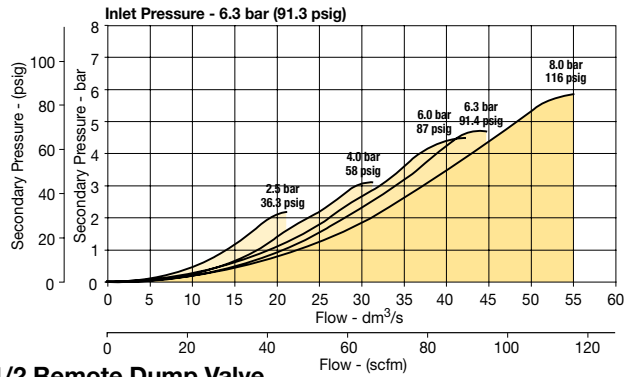

**1/2 Remote Dump Valve**

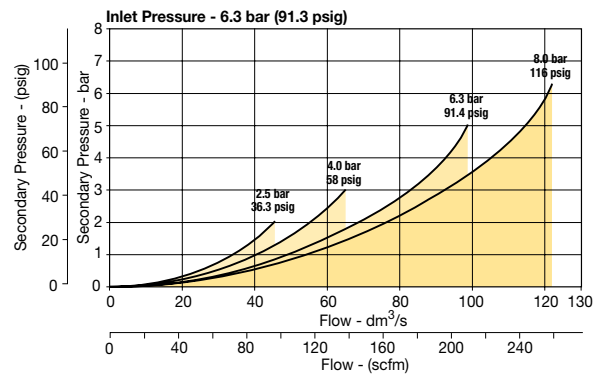

**P32D**

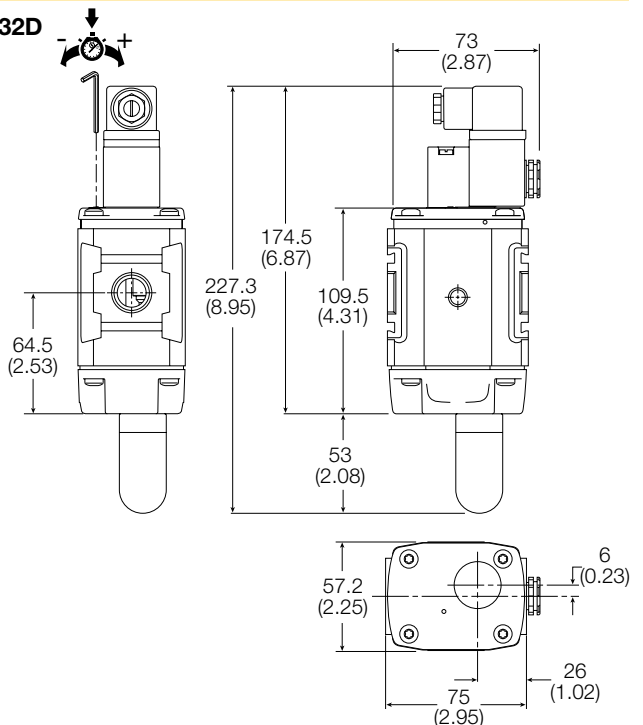

For mounting brackets see page 52




Global Air Preparation System

Soft Start Valve



Symbol



- Modular design with 1/4" or 1/2" integral ports (NPT, BSPP & BSPT)
- The 2-way, 2-position function provides for the safe introduction of pressure
- Adjustable slow start
- Solenoid or air pilot options
- High flow

Parker Global Series Soft Start Valves, provide for the safe introduction of pressure to machines or systems. Soft Start Valves, allow the pressure to gradually build to the set point before fully opening to deliver full flow at line pressure.

The controlled introduction of pressure can be an important safety factor and prevent damage to tooling when air pressure is introduced at machine or system start up.

**Note:** Soft Start Valves must be installed downstream of a 3/2 valve with exhaust capability

Options:

<b>P31S</b>		<b>A</b>	<b>9</b>	<b>2</b>	<b>S</b>	<b>G</b>	<b>N</b>	<b>Solenoid type only</b>		
<b>C</b>		<b>2CN</b>								
<b>Body size</b>		<b>Engr level</b>		<b>Thread type</b>		<b>Actuator interface</b>		<b>Solenoid voltage</b>		
Soft start (1/4")	P31S	Current	A	BSPP	1	0	Internal Pilot	2CN	24VDC non locking manual override	
Soft start (1/2")	P32S			BSPT	2	G	15mm solenoid (P31 only)	3GN	120VAC non locking manual override	
				NPT	9	C	30mm solenoid	1FN	120VAC non locking manual override (P31 series only)	
						P*	Threaded air pilot	<b>Solenoid type</b>		
						<b>Pilot type</b>		C	15mm (P31 series only)	
						P	External air pilot	A	30mm CNOMO coil (P32 only)	
						S	Solenoid pilot	D	30mm CNOMO coil (M12 connection) (P32 only)	
						Y	Internal air pilot			
<b>Note:</b>		<b>Port size</b>								
P32 unit used for both P32 & P33 series		Global modular mini (1/4")	2							
Bold items are most common.		Global modular compact (1/2")	4							

Port size	Description	Order code†	Flow dm³/s (scfm)	Max. bar (psig)	Height mm (inches)	Width mm (inches)	Depth mm (inches)	Weight
1/4"	120VAC Solenoid & cable plug	<b>P31SA92SGNC1FN</b>	17 (36)	10 (150)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/4"	24VDC Solenoid & cable plug	<b>P31SA92SGNC2CN</b>	17 (36)	10 (150)	166.0 (6.5)	57 (2.2)	40 (1.5)	0.41kg (0.9lbs)
1/4"	Internal air pilot operated	<b>P31SA92Y0N</b>	17 (36)	17 (250)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/4"	External air pilot (1/8" threaded)	<b>P31SA92PPN</b>	17 (36)	17 (250)	115.6 (4.5)	57 (2.2)	40 (1.5)	0.37kg (0.8lbs)
1/2"	120VAC 30mm coil & cable plug incl.	<b>P32SA94SCNA3GN</b>	48 (101)	10 (150)	162.5 (6.3)	88 (3.4)	57.2 (2.28)	0.87kg (1.5lbs)
1/2"	24VDC 30mm coil & cable plug	<b>P32SA94SCNA2CN</b>	48 (101)	10 (150)	227.5 (8.9)	88 (3.4)	57.2 (2.28)	0.90kg (2.0lbs)
1/2"	Internal air pilot operated	<b>P32SA94Y0N</b>	48 (101)	17 (250)	162.5 (6.3)	75 (2.9)	57.2 (2.28)	0.90kg (2.0lbs)
1/2"	External air pilot (1/8" threaded)	<b>P32SA94PPN</b>	48 (101)	17 (250)	162.5 (6.3)	75 (2.9)	57.2 (2.28)	0.87kg (1.5lbs)

† Standard part numbers shown in bold. For other models refer to Options chart above.

**Global Air Preparation System**

**Technical Information**

Fluid:	Compressed air	
Max. pressure solenoid operated:	10 bar (150 psig)	
Max. pressure air pilot operated:	17 bar (250 psig)	
Min. operating pressure:	3 bar (44 psig)	
Temperature Max.* solenoid operated:	-10°C to 50°C (14°F to 122°F)	
Temperature Max.* air pilot operated:	-20°C to 80°C (-4°F to 176°F)	
Air pilot port:	1/8"	
Typical flow with 6.3bar inlet pressure and 1 bar pressure drop:	<b>P31S</b>	17 dm <sup>3</sup> /s (36 scfm)
	<b>P32S</b>	48 dm <sup>3</sup> /s (101 scfm)

\* Air supply must be dry enough to avoid ice formation at temperatures below +2°C  
Snap pressure: Full flow when downstream pressure reaches 50% of the inlet pressure

**Material Specifications**

Body:	Aluminum
Body cover:	Polyester
Seals:	Nitrile NBR

**Mounting Brackets**


Description	Order code
	<b>P31S</b>
L-bracket mounting kit	<b>P3HKA00ML</b>
Foot bracket mounting kit	<b>P3HKA00MC</b>

**Note:**


For solenoid operators and cable plugs (connectors) see pages 68 to 69.

**Dimensions mm (inches)**


**P31S**

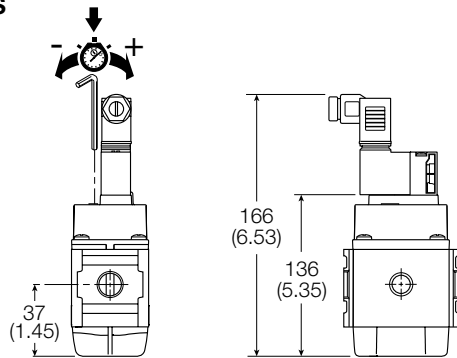

**P32S**

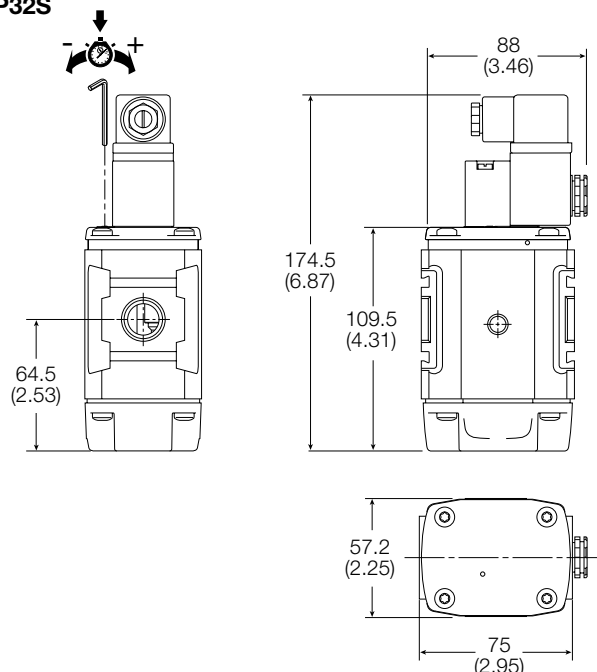


**Soft Start Function:**

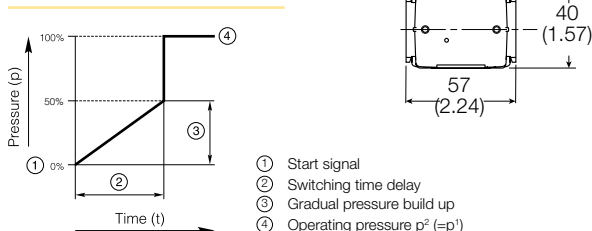


**Flow Charts**

**1/4 Soft Start Valve**

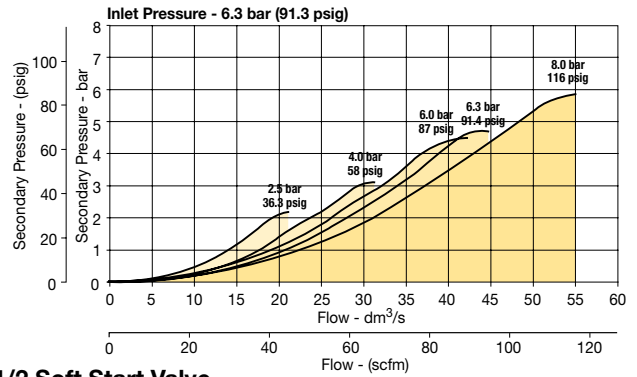

**1/2 Soft Start Valve**

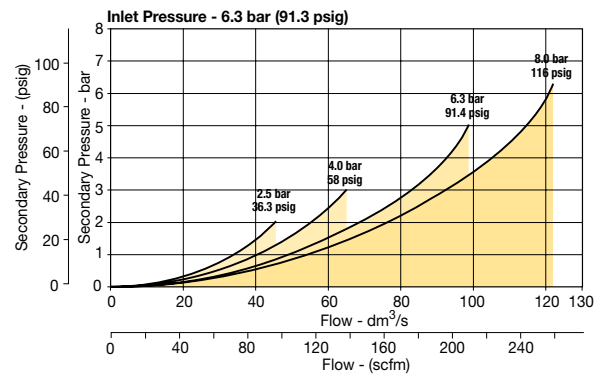

For mounting brackets see page 52





**Global Air Preparation System**


**Technical Information**

Pilot Solenoids:	According to VDE 0580
Enclosure rating:	According to DIN 400 50 IP 65
Connector socket:	According to DIN 43650 Form A
	Three solenoids, rated for continuous duty
Standard voltages:	24VDC
Power consumption (each solenoid):	
for primary and reset solenoids:	1.2 Watts on DC
Enclosure rating:	IP65, IEC 60529
Electrical connection:	M12, 5-pin
Ambient temperature:	15°F to 122°F (-10°C to 50°C)
Media temperature:	40°F to 175°F (4°C to 80°C)
Flow media:	Compressed Air, Filtered to Minimum 40 Micron
Inlet pressure:	30 to 150 PSIG (2 to 10 bar)
Pressure switch rating (Status indicator):	5 Amps at 30 Volts DC.
Monitoring:	Dynamically, cyclically, internally during each actuating and de-actuating movement. Monitoring function has memory and requires an overt act to reset unit after lockout.
Mounting orientation:	Vertically with pilot solenoids on top
Port threads:	3/4 NPT, 3/4 BSPP
Control reliable:	Category 4 (Cat 4); performance Level e (PLe) in accordance with Machine directive - EN ISO 13849-1 (Certification pending)



**Accessories - P33T Series**

Description	Part number
Black grill	<b>1834C05-001</b>
Body connector	<b>P32KA00CB</b>
Cables	
M12, 5-pin female to flying lead cable, TPE; 2 m (6.6 ft).....	<b>RKC 4.5-2/S1587</b>
M12, 5-pin male to flying lead cable, TPE; 2 m (6.6 ft).....	<b>RSC 4.5-2/S1587</b>
Port block kit	
1/2 NPT.....	<b>P32KA94CP</b>
3/4 NPT.....	<b>P32KA96CP</b>
1/2 BSPP.....	<b>P32KA14CP</b>
3/4 BSPP.....	<b>P32KA16CP</b>
1/2 BSPT.....	<b>P32KA24CP</b>
3/4 BSPT.....	<b>P32KA26CP</b>
Pressure switch	<b>1227A30-001</b>
Pressure transducer (Optional)	<b>1232H30-001</b>
T-bracket w/ body connector	<b>P32KA00MT</b>
T-bracket (Fits to body connector or port block)	<b>P32KA00MB</b>
Silencer(s) 3/4"	<b>5500A5013</b>
Solenoid (Main & reset)	<b>1527B7916-001</b>
Square flush mounting gauge kit, 0-160 psig.....	<b>K4511SCR160</b>


**Valve Wiring**

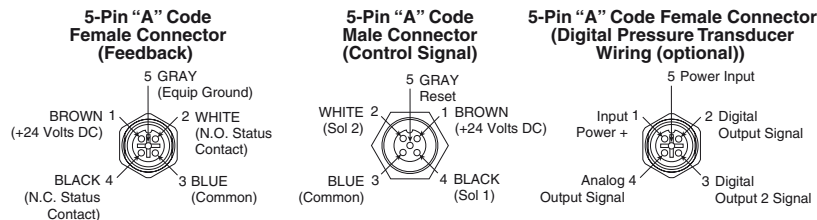

**Dimensions mm (inches)**

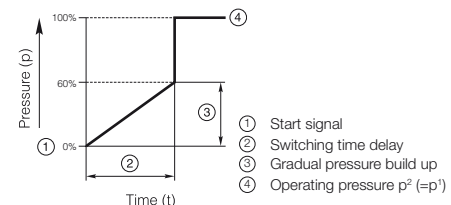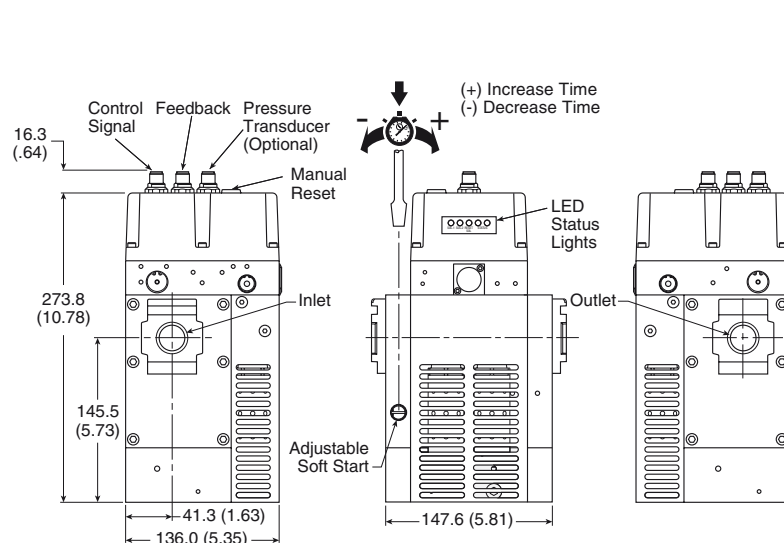

**Angle Mounting Bracket**

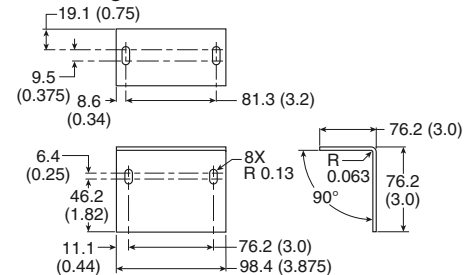

**Note:** Mounting bracket and installation screws included and required to install unit in the system.





**Global Air Preparation System**

**Valve De-actuated (ready-to-run):**

The flow of inlet air pressure to the inlet chamber of the main valve internals is restricted by a fixed orifice and an adjustable flow control as well as an air piloted 2-way normally closed poppet valve. The flow of inlet air pressure into the crossover passages is restricted by the size of the passage between the stem and the valve body opening. Flow is sufficient to quickly pressurize pilot supply / timing chambers 1 and 2. The inlet poppets prevent air flow from crossover passages into the outlet chamber. Air pressure acting on the inlet poppets and return pistons securely hold the valve elements in the closed position. (Reset adapter omitted for clarity.)

The green "Status" LED will be illuminated indicating the valve is operational.

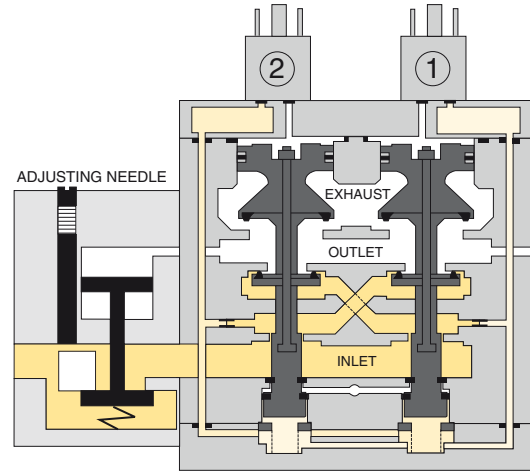



**Valve Actuated:**


Energizing the pilot valves simultaneously applies pressure to both pistons, forcing the internal parts to move to their actuated (open) position, where inlet air flow to crossover passages is fully open, inlet poppets are fully open and exhaust poppets are fully closed. The outlet is then pressurized at a rate allowed by the fixed orifice and the adjusted flow control. Once the air pressure in the outlet chamber reaches approximately 60% of inlet pressure, the air piloted 2-way normally closed poppet valve opens fully and the pressure in the inlet, crossovers, outlet, and timing chambers are quickly equalized. The adjustable flow control will control the time it takes for the outlet air pressure to reach approximately 60% of inlet pressure.

De-energizing the pilots quickly causes the valve elements to return to the ready-to-run position.

Solenoid 1, Solenoid 2 and the green "Status" LED's will be illuminated indicating the valve is operating properly.

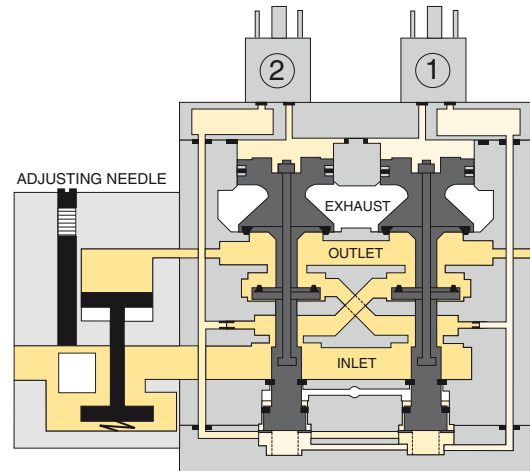

**Soft Start Function:**

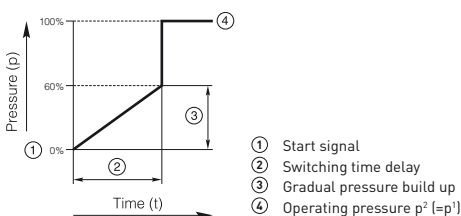



# Global Air Preparation System

## Valve Fault and Lock-out:

Whenever the valve elements operate in a sufficiently asynchronous manner, either on actuation or de-actuation, the valve will move to a locked-out position. In the locked-out position, one crossover and its related timing chamber will be exhausted, and the other crossover and its related timing chamber will be fully pressurized. The valve element (side 2) that is partially actuated has pilot air available to fully actuate it, but no air pressure on the return piston to fully de-actuate the valve element.

Air pressure in the crossover acts on the differential of side 2 stem diameters creating a latching force. Side 1 is in a fully closed position, and has no pilot air available to actuate, but has full pressure on the inlet poppet and return piston to hold the element in the fully closed position. Inlet air flow on side 1 into its crossover is restricted, and flows through the open inlet poppet on side 2, through the outlet into the exhaust port, and from the exhaust port to atmosphere. Residual pressure in the outlet is less than 1% of inlet pressure. The return springs are limited in travel, and can only return the valve elements to the intermediate (locked-out) position. Sufficient air pressure acting on the return pistons is needed to return the valve elements to a fully closed position.

The red "Status" LED will be illuminated indicating the valve in fault and lock-out must be reset

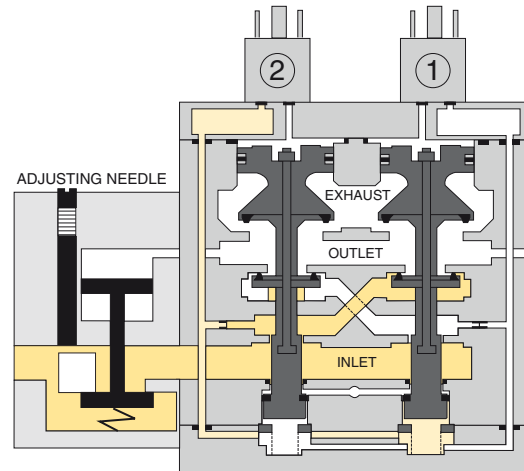

## Valve Reset (electrical or manual):




The reset procedure is as follows:

- Remove the electrical signals to the main coils
- Ensure there is air supplied to the valve
- Energize the reset solenoid for a minimum of 200 ms
- Allow a 200 ms delay after de-energizing the reset solenoid and re-energizing the main solenoids

The valve will remain in the locked-out position, even if the inlet air supply is removed and re-applied.

A remote reset signal must be applied to reset the valve. A momentary, remote electrical signal must be applied to the reset solenoid to apply pressure to the reset pistons in the valve. Actuation of the reset piston physically pushes the main valve elements to their closed position. Inlet air fully pressurizes the crossovers and holds the inlet poppets on seat. Actuation of the reset piston opens the reset poppet, thereby, immediately exhausting pilot supply air, thus, preventing valve operation during reset (Reset adapter added to illustration.). De-actuation of reset pistons causes the reset poppets to close and pilot supply to fully pressurize. Reset air pressure is applied by a 3/2 normally closed solenoid, or a manual push button mounted on the reset adapter in the top valve cover.

The green "Status" LED will be illuminated once the valve is reset.

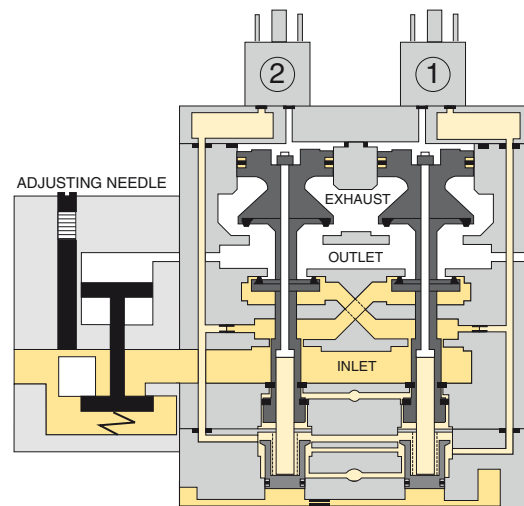

Global Air Preparation System

Solenoid Operators - CNOMO


Technical data -

Solenoid operators, coil combinations

	NC Normal Operator with 22 x 30 standard coil	NC Normal Operator with 30 x 30 standard coil
Working pressure	0 to 10 bar	0 to 10 bar
Ambient temperature	-10°C to 60°C *	-10°C to 60°C *
Power (DC)	4.8W	2.7W
Power (AC)	8.5VA	4.9VA
Voltage tolerance	+/-10%	+/-10%
Duty cycle	100%	100%
Insulation class	F	F
Electric connection	B Industrial	DIN 43650A
Protection	IP65	IP65
Approval		UL/CSA
Working media	All neutral media such as compressed air	

\* Limited to 50°C if use with 100% duty cycle

Solenoid Coils with M12 Connection



Voltage	Order code	Weight (Kg)
Direct current		
24VDC	<b>P2FC6449</b>	0.065

Transients

Interrupting the current through the solenoid coil produces momentary voltage peaks which, under unfavourable conditions, can amount to several hundred times the rated operating voltage. Normally, these transients do not cause problems, but to achieve the Maximum life of relays in the circuit (and particularly of transistors, thyristors and integrated circuits) it is desirable to provide protection by means of voltage-dependent resistors (varistors). All connectors/cable plugs EN175301-803 with LED's include this type of circuit protection.

Materials


Pilot Valve

Body:	Polyamide
Armature tube:	Brass
Plunger & core:	Corrosion resistant Cr-Ni steel
Seals:	Fluorocarbon
Screws:	Stainless steel

Coil

Encapsulation material:	Thermoplastic as standard Duroplast for M12 connection
-------------------------	---


Spare Base Solenoid Pilot Operator CNOMO NC



Description	Order code non-lock manual override	Weight (Kg)
Standard Duty	<b>P2FP23N4B</b>	0.065
No Override	<b>P2FP23N4A</b>	0.065

**Note:** Solenoid pilot operators are fitted to the Global range. Order the above part numbers for spares. The operators are supplied with mounting screws and interface 'O' rings. Coils and connectors must be ordered separately.

Solenoid Coils with DIN A or Industrial B Connection





Voltage	22mm x 30mm Order code B industrial standard	Weight (Kg)	30mm x 30mm Order code DIN 43650A standard	Weight (Kg)
Direct current				
24VDC	<b>P2FCB449</b>	0.093	<b>P2FCA449</b>	0.105
Alternative current				
110V 50Hz, 120V 60Hz	<b>P2FCB453</b>	0.093	<b>P2FCA453</b>	0.105




Global Air Preparation System


Solenoid Connectors / Cable Plugs EN175301-803

	Description	Order code 22mm Form B Industrial	Order code 30mm Form A DIN 43650A
	With standard screw	<b>PS2429BP</b>	<b>PS2028BP</b>
	With LED and protection 24VAC/DC	<b>PS243079BP</b>	<b>PS203279BP</b>
	With LED and protection 110VAC	<b>PS243083BP</b>	<b>PS203283BP</b>
	With cable	<b>PS2429JBP</b>	<b>PS2028JCP</b>
	Standard with 2m cable IP65	<b>PS2430J79BP</b>	<b>PS2032J79CP</b>
	24VAC/DC, 2m cable LED and protection IP65	<b>PS2430J83BP</b>	<b>PS2032J83CP</b>
	110VAC/DC, 2m cable LED and protection IP65	<b>PS2430J83BP</b>	<b>PS2032J83CP</b>

Solenoid coil dimensions mm (inches)

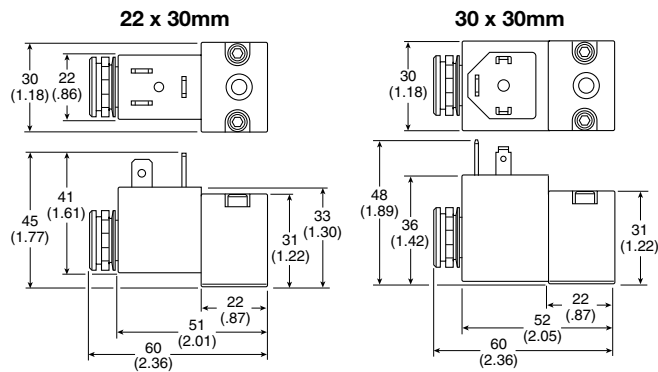

Electrical schematics




<b>PS243079BP</b>	<b>PS203279BP</b>
<b>PS2430J79BP</b>	<b>PS2032J79CP</b>
<b>PS243083BP</b>	<b>PS203283BP</b>
<b>PS2430J83BP</b>	<b>PS2032J83CP</b>
<b>PS294679BP</b>	<b>PS294683BP</b>
<b>PS2946J79BP</b>	<b>PS2946J83BP</b>

Cable plug dimensions mm (inches)


22mm Form B Industrial  
Cable plugs

**PS2429BP**




30mm DIN 43650A  
Cable plugs

**PS2028BP**



**Global Air Preparation System**

**Modular Ball Valves**



**Features**

The Modular Ball Valves provide shut off line pressure with a non-sticking 90° turn handle to prevent unauthorised adjustment. When the inlet pressure is turned off the downstream air pressure vents through the exhaust port. The padlock slide may be assembled on either side. It is recommended that this is assembled after mounting.

**Note:** This padlock slide is a permanent assembly and may not be removed later

**Ordering Information**

Model type	Port size	Exhaust port	Thread type	Flow dm <sup>3</sup> /s (scfm)	Modular ball valve flow from left to right
<b>P31</b>	1/4"	1/4"	NPT	20 (42.4)	<b>P31VA92LBNN</b>
<b>P32</b>	3/8"	1/4"	NPT	90 (190.7)	<b>P32VA93LBNN</b>
	1/2"	1/4"	NPT	122 (258.5)	<b>P32VA94LBNN</b>
<b>P33</b>	1/2"	1/2"	NPT	265 (561.5)	<b>P33VA94LBNN</b>
	3/4"	1/2"	NPT	320 (678)	<b>P33VA96LBNN</b>

For thread type:    BSPP 1  
                               BSPT 2  
                               NPT 9

**Specifications**


Operating temperature	-20°C to 80°C (-4°F to 176°F)	
Max. supply pressure	17 bar (250 psig)	
Port size	BSPP / BSPT / NPT	1/4, 3/8, 1/2, 3/4
Weight	<b>P31:</b>	0.19 kg (0.41 lbs)
	<b>P32:</b>	0.47 kg (1.00 lbs)
	<b>P33:</b>	0.80 kg (1.70 lbs)

**Materials of Construction**


Body	Aluminum	
Seals	PTFE	
Ball	<b>P31</b>	Brass
	<b>P32 / P33</b>	Chrome plated brass

**Dimensions mm (inches)**


**P31**

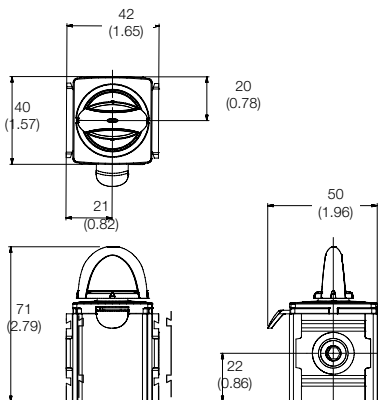

**P32**

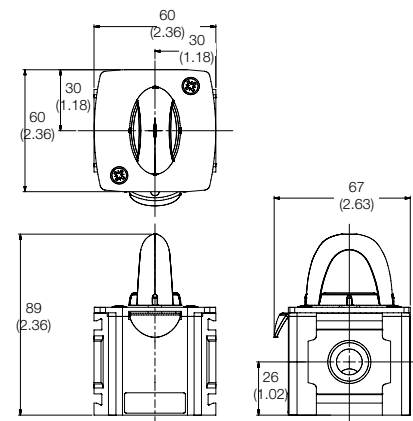

**P33**

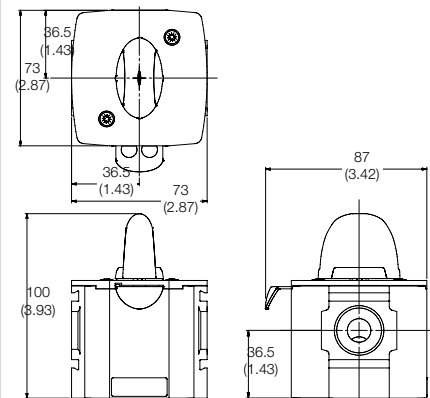


**Global Air Preparation System**

**Manifold Blocks**



**Symbol**



**Features**

- Available in 1/4" or 3/4" threaded inlet / outlet ports
- Two additional top and bottom auxiliary ports standard
- Can be mounted anywhere in the FRL system

**Ordering Information**

Model type	In / Out port size	Auxiliary port size top	Auxiliary port size bottom	Thread type	Order code
<b>P31</b>	1/4"	1/4"	1/4"	NPT	<b>P31MA92022N</b>
<b>P32</b>	1/2"	1/4"	1/2"	NPT	<b>P32MA94024N</b>
<b>P33</b>	3/4"	1/4"	1/2"	NPT	<b>P33MA96024N</b>

For thread type: BSPP 1  
 BSPT 2  
 NPT 9


**Specifications**

Operating temperature	-40°C to 65.5°C (-40°F to 150°F)
Max. supply pressure	20.7 bar (300 psig)
Weight	<b>P31:</b> 0.19 kg (0.26 lbs) <b>P33:</b> 0.34 kg (0.42 lbs)

**Material Specifications**

Body Aluminum


**Dimensions mm (inches)**

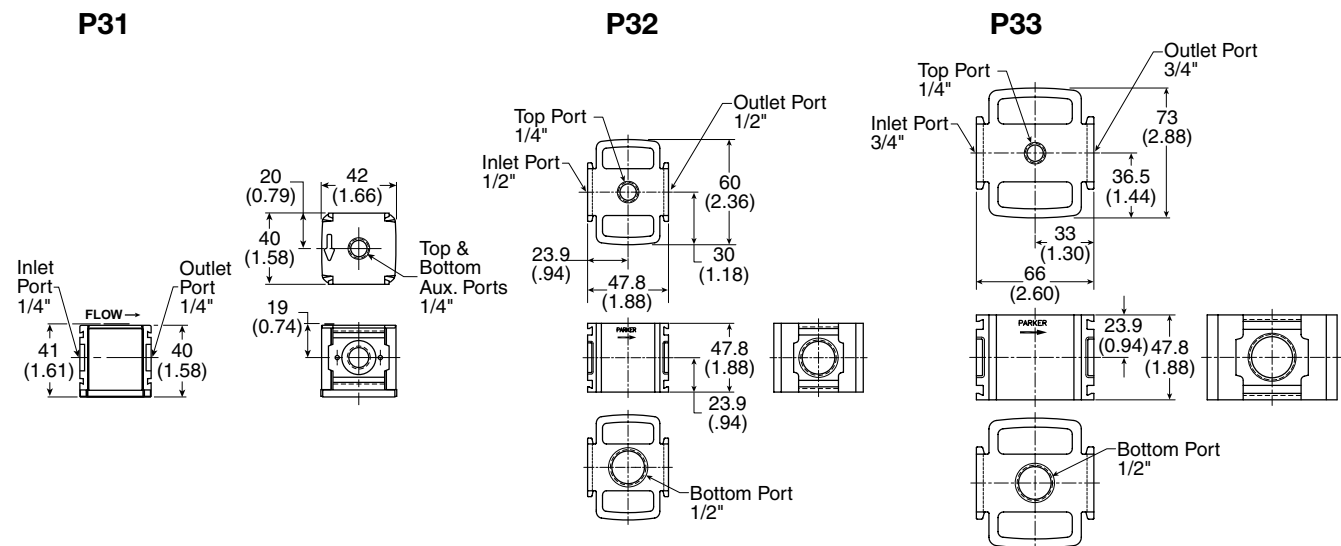


**Global Air Preparation System**

**Accessories - P31 Series**


**C-Bracket**  
(Fits to filter and lubricator body)  
**P31KA00MW**

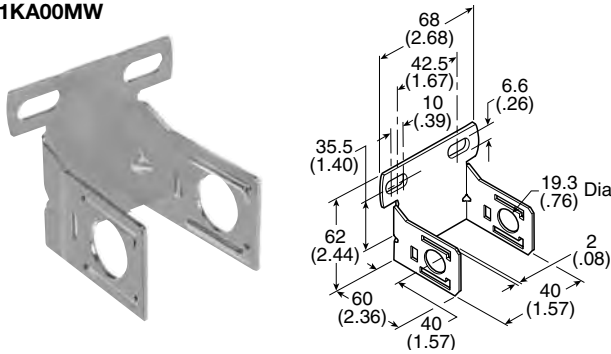

**T-Bracket w/ Body Connector**  
(O-ring not shown)  
**P31KA00MT**

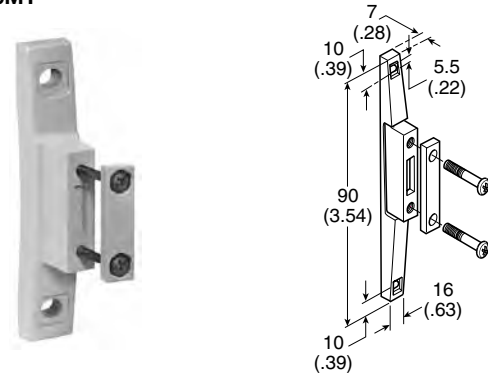

**Body Connector**  
(O-ring not shown)  
**P31KA00CB**

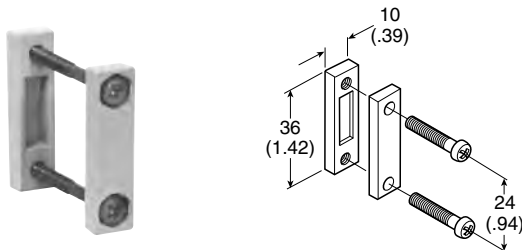

**Port Block Kit**  
(O-ring not shown)

- |                |                  |                |                  |
|----------------|------------------|----------------|------------------|
| 1/8 NPT .....  | <b>P31KA91CP</b> | 1/8 BSPT ..... | <b>P31KA21CP</b> |
| 1/4 NPT .....  | <b>P31KA92CP</b> | 1/4 BSPT ..... | <b>P31KA22CP</b> |
| 3/8 NPT .....  | <b>P31KA93CP</b> | 3/8 BSPT ..... | <b>P31KA23CP</b> |
| 1/8 BSPP ..... | <b>P31KA11CP</b> |                |                  |
| 1/4 BSPP ..... | <b>P31KA12CP</b> |                |                  |
| 3/8 BSPP ..... | <b>P31KA13CP</b> |                |                  |




**Port Block Kit w/ T-Bracket**  
(O-ring not shown)

- |                |                  |                |                  |
|----------------|------------------|----------------|------------------|
| 1/8 NPT .....  | <b>P31KA91CN</b> | 1/8 BSPT ..... | <b>P31KA21CN</b> |
| 1/4 NPT .....  | <b>P31KA92CN</b> | 1/4 BSPT ..... | <b>P31KA22CN</b> |
| 3/8 NPT .....  | <b>P31KA93CN</b> | 3/8 BSPT ..... | <b>P31KA23CN</b> |
| 1/8 BSPP ..... | <b>P31KA11CN</b> |                |                  |
| 1/4 BSPP ..... | <b>P31KA12CN</b> |                |                  |
| 3/8 BSPP ..... | <b>P31KA13CN</b> |                |                  |



**Angle Bracket**  
(Fits to regulator and filter/regulator body)  
**P31KA00MR**

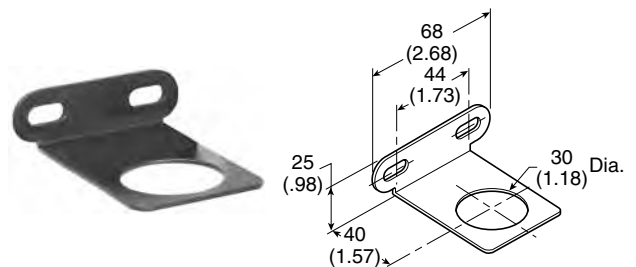


**Global Air Preparation System**

**Accessories - P32 Series**


**T-Bracket w/ Body Connector**

**P32KA00MT**

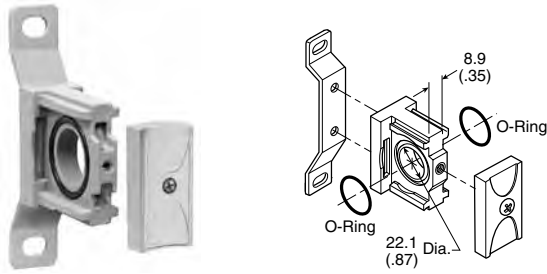

**Body Connector**

**P32KA00CB**

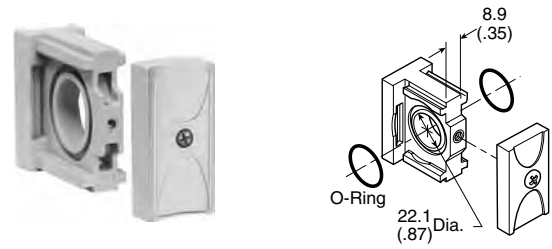

**Port Block Kit**


- |                |                  |                |                  |
|----------------|------------------|----------------|------------------|
| 1/4 NPT.....   | <b>P32KA92CP</b> | 1/4 BSPT ..... | <b>P32KA22CP</b> |
| 3/8 NPT.....   | <b>P32KA93CP</b> | 3/8 BSPT ..... | <b>P32KA23CP</b> |
| 1/2 NPT.....   | <b>P32KA94CP</b> | 1/2 BSPT ..... | <b>P32KA24CP</b> |
| 3/4 NPT.....   | <b>P32KA96CP</b> | 3/4 BSPT ..... | <b>P32KA26CP</b> |
| 1/4 BSPP ..... | <b>P32KA12CP</b> |                |                  |
| 3/8 BSPP ..... | <b>P32KA13CP</b> |                |                  |
| 1/2 BSPP ..... | <b>P32KA14CP</b> |                |                  |
| 3/4 BSPP ..... | <b>P32KA16CP</b> |                |                  |



**Angle Bracket**

**(Fits to regulator and filter/regulator bonnet)**


**P32KA00MR**



**L-Bracket**

**(Fits to filter and lubricator body)**


**P32KA00ML**



**T-Bracket**

**(fits to body connector or port block)**

**P32KA00MB**

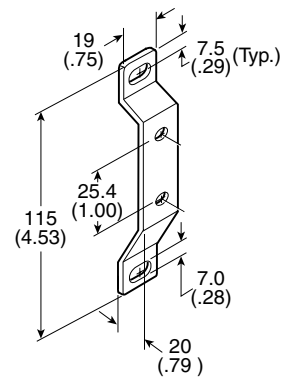


**Global Air Preparation System**

**Accessories - P33 Series**


**T-Bracket w/ Body Connector**

**P32KA00MT**

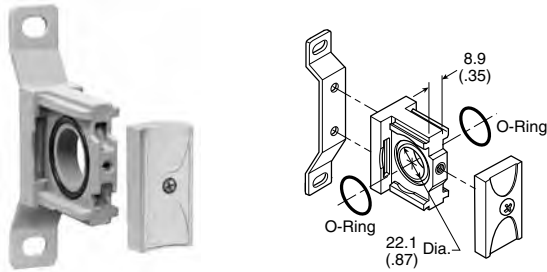

**Body Connector**

**P32KA00CB**

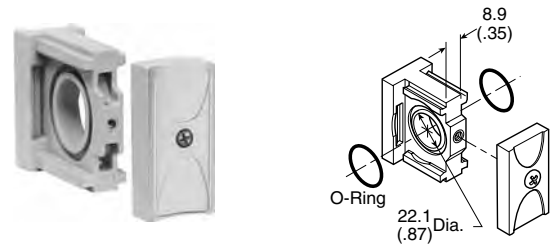

**Port Block Kit**


- |                |                  |                |                  |
|----------------|------------------|----------------|------------------|
| 1/4 NPT.....   | <b>P32KA92CP</b> | 1/4 BSPT ..... | <b>P32KA22CP</b> |
| 3/8 NPT.....   | <b>P32KA93CP</b> | 3/8 BSPT ..... | <b>P32KA23CP</b> |
| 1/2 NPT.....   | <b>P32KA94CP</b> | 1/2 BSPT ..... | <b>P32KA24CP</b> |
| 3/4 NPT.....   | <b>P32KA96CP</b> | 3/4 BSPT ..... | <b>P32KA26CP</b> |
| 1/4 BSPP ..... | <b>P32KA12CP</b> |                |                  |
| 3/8 BSPP ..... | <b>P32KA13CP</b> |                |                  |
| 1/2 BSPP ..... | <b>P32KA14CP</b> |                |                  |
| 3/4 BSPP ..... | <b>P32KA16CP</b> |                |                  |



**Angle Bracket**

**(Fits to regulator and filter/regulator bonnet)**


**P33KA00MR**



**L-Bracket**

**(Fits to filter and lubricator body)**


**P33KA00ML**



**T-Bracket**


**(fits to body connector or port block)**

**P32KA00MB**

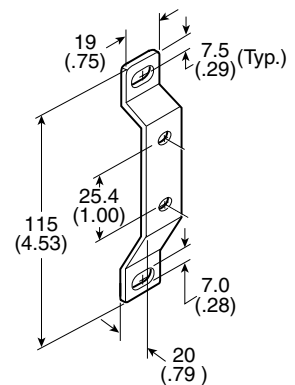

**Global Air Preparation System**


**Pressure Switch – PPS1**

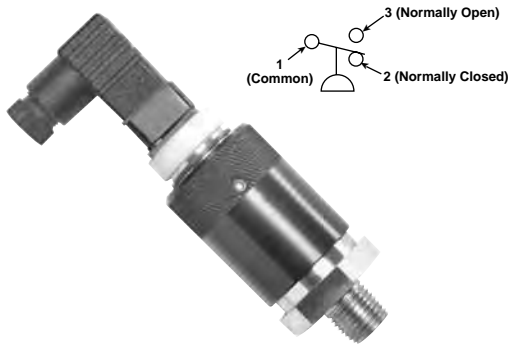

- Long life elastomer diaphragm
- High quality snap action switch
- Field adjustable
- Compact design
- Easily customized
- Quick delivery
- NEMA 4, 13

**Operation**

The pressure switch monitors the air pressure in your pneumatic system. When the pressure in your system either drops below or exceeds the set point pressure, an electrical output is given.

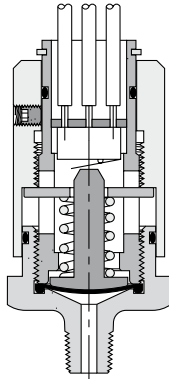

**Options:**


<b>Thread</b>		<b>Circuit</b>		<b>Range*</b>		<b>Set Point Direction</b>		<b>Electrical Connection</b>	
1/4" NPT male	1	SPDT	C	1	3-10 PSI	R	Rising	HM	DIN 9.4mm
1/8" NPT male	2			2	6-30 PSI			WL	Wire leads 18"
1/4" BSPP male	17			3	20-120 PSI				
1/8" BSPP male	18			4	100-400 PSI†				

**Note: Switch is field adjustable.**

\* Factory setting for calibration purposes  
 Range 1 = 6 PSI  
 Range 2 = 18 PSI  
 Range 3 = 70 PSI  
 Range 4 = 250 PSI

† Only available in 1/4" NPT

**Dimensions**

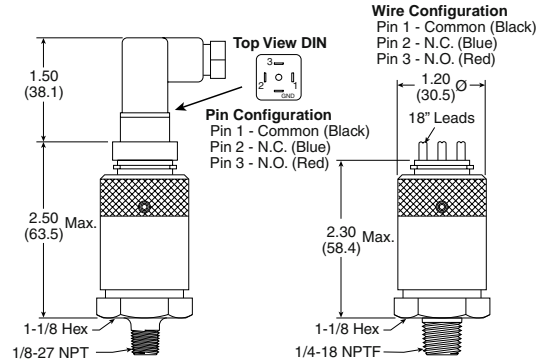

**Definitions and Terminology**

**Repeatability** — Accuracy is the maximum allowable set point deviation of a single pressure or temperature switch under one given set of environmental and operational conditions.

**Single Pole Double Throw (SPDT) Switching element** — A SPDT switching element has one normally open, one normally closed and one common terminal. Three terminals mean that the switch can be wired with the circuit either normally open (NO), or normally closed (NC), or both.

**Dead Band** — The dead band, sometimes referred to as “differential” or “hysteresis”, is the change in pressure between actuation and deactuation set points.












**Specifications**

Set point tolerance	±1 PSI or 5% (.07 bar)
Temperature range	-40F° to 220F° (-40C° to 105C°)
Max. operating pressure (Ranges 1, 2, 3)	250 PSI (17.2 bar)
Max. operating pressure (Range 4)	2000 PSI (137.9 bar)
Deadband	10 - 20% of set pressure
Current rating	3A @ 125 VAC 2A @ 30 VDC (Resistive)
Circuit form	SPDT Standard
Cycle life	1 Million

**Material Specifications**









Adjustment knob	Anodized aluminum
Body	Brass
Diaphragm	Nitrile

**Global Air Preparation System**






Series	Description	Order code	
P31 P32 P33	Panel Mount Nut (Plastic)	<b>P31KA00MP P32KA00MP P33KA00MP</b>	
P31 P32 P33	Panel Mount Nut (Aluminum)	<b>P31KA00MM P32KA00MM P33KA00MM</b>	
P31 P32 P33	5µ Element Kit	<b>P31KA00ESE P32KA00ESE P33KA00ESE</b>	
P31 P32 P33	1µ Element Kit	<b>P31KA00ES9 P32KA00ES9 P33KA00ES9</b>	
P31 P32 P33	0.01µ Element Kit	<b>P31KA00ESC P32KA00ESC P33KA00ESC</b>	
P31 P32 P33	Adsorber Element Kit	<b>P31KA00ESA P32KA00ESA P33KA00ESA</b>	
P32 / P33	Auto Drain Kit	<b>P32KA00DA</b>	
P31	Differential Pressure Indicator Kit	<b>P31KA00RQ</b>	
P32 / P33		<b>P32KA00RQ</b>	
P31 P32 / P33	Fill Plug Kit	<b>P31KA00PL P32KA00PL</b>	
P31 / P32 / P33	Drip Control Assembly Kit	<b>P32KA00PH</b>	
P31 P32 P33	Plastic Bowl w/ Bowl Guard & Manual Drain	<b>P31KA00BGM P32KA00BGM P33KA00BGM</b>	



**Global Air Preparation System**

<b>Series</b>	<b>Description</b>	<b>Order code</b>	
P31	Plastic Bowl w/ Bowl Guard & Pulse Drain	<b>P31KA00BGB</b>	
P32 P33	Plastic Bowl w/ Bowl Guard & Auto Drain	<b>P32KA00BGA</b> <b>P33KA00BGA</b>	
P31 P32 P33	Metal Bowl w/o Sight Gauge & Manual Drain	<b>P31KA00BMM</b> <b>P32KA00BMM</b> <b>P33KA00BMM</b>	
P31	Metal Bowl w/o Sight Gauge & Pulse Drain	<b>P31KA00BMB</b>	
P32 P33	Metal Bowl w/o Sight Gauge & Auto Drain	<b>P32KA00BMA</b> <b>P33KA00BMA</b>	
P32 P33	Metal Bowl w/ Sight Gauge & Manual Drain	<b>P32KA00BSM</b> <b>P33KA00BSM</b>	
P32 P33	Metal Bowl w/ Sight Gauge & Auto Drain	<b>P32KA00BSA</b> <b>P33KA00BSA</b>	
P31 P32 P33	Lubricator - Plastic Bowl w/ Bowl Guard No Drain	<b>P31KA00BGN</b> <b>P32KA00BGN</b> <b>P33KA00BGN</b>	
P31 P32 P33	Lubricator - Metal Bowl w/o Sight Gauge No Drain	<b>P31KA00BMN</b> <b>P32KA00BMN</b> <b>P33KA00BMN</b>	
P32 P33	Lubricator - Metal Bowl w/ Sight Gauge No Drain	<b>P32KB00BSN</b> <b>P33KA00BSN</b>	
P31 P32 P33	Regulator - Relieving Repair Kit	<b>P31KA00RB</b> <b>P32KA00RB</b> <b>P33KA00RB</b>	
P31 P32 P33	Regulator - Non Relieving Repair Kit	<b>P31KA00RC</b> <b>P32KA00RC</b> <b>P33KA00RC</b>	

**Global Air Preparation System**

Series	Description	Connection	Order code
P31 P32 P33	Regulator - Main Adjusting Spring 0-2 bar (0-30 psig) Kit		<b>P31KA00PR</b> <b>P32KA00PR</b> <b>P33KA00PR</b>
P31 P32 P33	Regulator - Main Adjusting Spring 0-4.1 bar (0-60 psig) Kit		<b>P31KA00PS</b> <b>P32KA00PS</b> <b>P33KA00PS</b>
P31 P32 P33	Regulator - Main Adjusting Spring 0-8.6 bar (0-125 psig) Kit		<b>P31KA00PT</b> <b>P32KA00PT</b> <b>P33KA00PT</b>
P32 P33	Regulator - Main Adjusting Spring 0-17 bar (0-250 psig) Kit		<b>P32KA00PV</b> <b>P33KA00PV</b>
P31	Square Flush Mounting Gauge Kit	0-4 bar 0-11 bar 0-60 psig 0-160 psig	<b>K4511SCR04B</b> <b>K4511SCR11B</b> <b>K4511SCR060</b> <b>K4511SCR160</b>
			
P31	1" Round Gauge	0-60 psig / 0-4.1 bar 1/8" 0-160 psig / 0-10 bar 1/8"	<b>K4510N18060</b> <b>K4510N18160</b>
			
P31	40mm Round Gauge	0-30 psig / 0-2 bar 1/8" 0-60 psig / 0-4.1 bar 1/8" 0-160 psig / 0-10 bar 1/8"	<b>K4515N18030</b> <b>K4515N18060</b> <b>K4515N18160</b>
			
P32 / P33	50mm Round Gauge	0-30 psig / 0-2 bar 1/4" 0-60 psig / 0-4.1 bar 1/4" 0-160 psig / 0-10 bar 1/4" 0-300 psig / 0-20 bar 1/4"	<b>K4520N14030</b> <b>K4520N14060</b> <b>K4520N14160</b> <b>K4520N14300</b>
			
P31 P32 / P33	Body Connector O-ring (Spares kit) (Pack of 10)		<b>P31KA00CY</b> <b>P32KA00CY</b>
			

**Global Air Preparation System**

---

**Notes**

---

# Safety Guide For Selecting And Using Pneumatic Division Products And Related Accessories

## WARNING:

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF PNEUMATIC DIVISION PRODUCTS, ASSEMBLIES OR RELATED ITEMS (“PRODUCTS”) CAN CAUSE DEATH, PERSONAL INJURY, AND PROPERTY DAMAGE. POSSIBLE CONSEQUENCES OF FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THESE PRODUCTS INCLUDE BUT ARE NOT LIMITED TO:**

- Unintended or mistimed cycling or motion of machine members or failure to cycle
- Work pieces or component parts being thrown off at high speeds.
- Failure of a device to function properly for example, failure to clamp or unclamp an associated item or device.
- Explosion
- Suddenly moving or falling objects.
- Release of toxic or otherwise injurious liquids or gasses.

Before selecting or using any of these Products, it is important that you read and follow the instructions below.

## 1. GENERAL INSTRUCTIONS

- 1.1. Scope: This safety guide is designed to cover general guidelines on the installation, use, and maintenance of Pneumatic Division Valves, FRLs (Filters, Pressure Regulators, and Lubricators), Vacuum products and related accessory components.
- 1.2. Fail-Safe: Valves, FRLs, Vacuum products and their related components can and do fail without warning for many reasons. Design all systems and equipment in a fail-safe mode, so that failure of associated valves, FRLs or Vacuum products will not endanger persons or property.
- 1.3. Relevant International Standards: For a good guide to the application of a broad spectrum of pneumatic fluid power devices see: ISO 4414:1998, Pneumatic Fluid Power – General Rules Relating to Systems. See [www.iso.org](http://www.iso.org) for ordering information.
- 1.4. Distribution: Provide a copy of this safety guide to each person that is responsible for selection, installation, or use of Valves, FRLs or Vacuum products. Do not select, or use Parker valves, FRLs or vacuum products without thoroughly reading and understanding this safety guide as well as the specific Parker publications for the products considered or selected.
- 1.5. User Responsibility: Due to the wide variety of operating conditions and applications for valves, FRLs, and vacuum products Parker and its distributors do not represent or warrant that any particular valve, FRL or vacuum product is suitable for any specific end use system. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The user, through its own analysis and testing, is solely responsible for:
  - Making the final selection of the appropriate valve, FRL, Vacuum component, or accessory.
  - Assuring that all user’s performance, endurance, maintenance, safety, and warning requirements are met and that the application presents no health or safety hazards.
  - Complying with all existing warning labels and / or providing all appropriate health and safety warnings on the equipment on which the valves, FRLs or Vacuum products are used; and,
  - Assuring compliance with all applicable government and industry standards.
- 1.6. Safety Devices: Safety devices should not be removed, or defeated.
- 1.7. Warning Labels: Warning labels should not be removed, painted over or otherwise obscured.
- 1.8. Additional Questions: Call the appropriate Parker technical service department if you have any questions or require any additional information. See the Parker publication for the product being considered or used, or call 1-800-CPARKER, or go to [www.parker.com](http://www.parker.com), for telephone numbers of the appropriate technical service department.

## 2. PRODUCT SELECTION INSTRUCTIONS

- 2.1. Flow Rate: The flow rate requirements of a system are frequently the primary consideration when designing any pneumatic system. System components need to be able to provide adequate flow and pressure for the desired application.
- 2.2. Pressure Rating: Never exceed the rated pressure of a product. Consult product labeling, Pneumatic Division catalogs or the instruction sheets supplied for Maximum pressure ratings.
- 2.3. Temperature Rating: Never exceed the temperature rating of a product. Excessive heat can shorten the life expectancy of a product and result in complete product failure.
- 2.4. Environment: Many environmental conditions can affect the integrity and suitability of a product for a given application. Pneumatic Division products are designed for use in general purpose industrial applications. If these products are to be used in unusual circumstances such as direct sunlight and/or corrosive or caustic environments, such use can shorten the useful life and lead to premature failure of a product.
- 2.5. Lubrication and Compressor Carryover: Some modern synthetic oils can and will attack nitrile seals. If there is any possibility of synthetic oils or greases migrating into the pneumatic components check for compatibility with the seal materials used. Consult the factory or product literature for materials of construction.
- 2.6. Polycarbonate Bowls and Sight Gauges: To avoid potential polycarbonate bowl failures:
  - Do not locate polycarbonate bowls or sight gauges in areas where they could be subject to direct sunlight, impact blow, or temperatures outside of the rated range.
  - Do not expose or clean polycarbonate bowls with detergents, chlorinated hydro-carbons, ketones, esters or certain alcohols.
  - Do not use polycarbonate bowls or sight gauges in air systems where compressors are lubricated with fire resistant fluids such as phosphate ester and di-ester lubricants.

## Global Air Preparation System

- 2.7. Chemical Compatibility: For more information on plastic component chemical compatibility see Pneumatic Division technical bulletins Tec-3, Tec-4, and Tec-5
- 2.8. Product Rupture: Product rupture can cause death, serious personal injury, and property damage.
- Do not connect pressure regulators or other Pneumatic Division products to bottled gas cylinders.
  - Do not exceed the Maximum primary pressure rating of any pressure regulator or any system component.
  - Consult product labeling or product literature for pressure rating limitations.
3. PRODUCT ASSEMBLY AND INSTALLATION INSTRUCTIONS
- 3.1. Component Inspection: Prior to assembly or installation a careful examination of the valves, FRLs or vacuum products must be performed. All components must be checked for correct style, size, and catalog number. DO NOT use any component that displays any signs of nonconformance.
- 3.2. Installation Instructions: Parker published Installation Instructions must be followed for installation of Parker valves, FRLs and vacuum components. These instructions are provided with every Parker valve or FRL sold, or by calling 1-800-CPARKER, or at [www.parker.com](http://www.parker.com).
- 3.3. Air Supply: The air supply or control medium supplied to Valves, FRLs and Vacuum components must be moisture-free if ambient temperature can drop below freezing
4. VALVE AND FRL MAINTENANCE AND REPLACEMENT INSTRUCTIONS
- 4.1. Maintenance: Even with proper selection and installation, valve, FRL and vacuum products service life may be significantly reduced without a continuing maintenance program. The severity of the application, risk potential from a component failure, and experience with any known failures in the application or in similar applications should determine the frequency of inspections and the servicing or replacement of Pneumatic Division products so that products are replaced before any failure occurs. A maintenance program must be established and followed by the user and, at Minimum, must include instructions 4.2 through 4.10.
- 4.2. Installation and Service Instructions: Before attempting to service or replace any worn or damaged parts consult the appropriate Service Bulletin for the valve or FRL in question for the appropriate practices to service the unit in question. These Service and Installation Instructions are provided with every Parker valve and FRL sold, or are available by calling 1-800-CPARKER, or by accessing the Parker web site at [www.parker.com](http://www.parker.com).
- 4.3. Lockout / Tagout Procedures: Be sure to follow all required lockout and tagout procedures when servicing equipment. For more information see: OSHA Standard – 29 CFR, Part 1910.147, Appendix A, The Control of Hazardous Energy – (Lockout / Tagout)
- 4.4. Visual Inspection: Any of the following conditions requires immediate system shut down and replacement of worn or damaged components:
- Air leakage: Look and listen to see if there are any signs of visual damage to any of the components in the system. Leakage is an indication of worn or damaged components.
  - Damaged or degraded components: Look to see if there are any visible signs of wear or component degradation.
  - Kinked, crushed, or damaged hoses. Kinked hoses can result in restricted air flow and lead to unpredictable system behavior.
  - Any observed improper system or component function: Immediately shut down the system and correct malfunction.
  - Excessive dirt build-up: Dirt and clutter can mask potentially hazardous situations.
- Caution: Leak detection solutions should be rinsed off after use.
- 4.5. Routine Maintenance Issues:
- Remove excessive dirt, grime and clutter from work areas.
  - Make sure all required guards and shields are in place.
- 4.6. Functional Test: Before initiating automatic operation, operate the system manually to make sure all required functions operate properly and safely.
- 4.7. Service or Replacement Intervals: It is the user's responsibility to establish appropriate service intervals. Valves, FRLs and vacuum products contain components that age, harden, wear, and otherwise deteriorate over time. Environmental conditions can significantly accelerate this process. Valves, FRLs and vacuum components need to be serviced or replaced on routine intervals. Service intervals need to be established based on:
- Previous performance experiences.
  - Government and / or industrial standards.
  - When failures could result in unacceptable down time, equipment damage or personal injury risk.
- 4.8. Servicing or Replacing of any Worn or Damaged Parts: To avoid unpredictable system behavior that can cause death, personal injury and property damage:
- Follow all government, state and local safety and servicing practices prior to service including but not limited to all OSHA Lockout Tagout procedures (OSHA Standard – 29 CFR, Part 1910.147, Appendix A, The Control of Hazardous Energy – Lockout / Tagout).
  - Disconnect electrical supply (when necessary) before installation, servicing, or conversion.
  - Disconnect air supply and depressurize all air lines connected to system and Pneumatic Division products before installation, service, or conversion.
  - Installation, servicing, and / or conversion of these products must be performed by knowledgeable personnel who understand how pneumatic products are to be applied.
  - After installation, servicing, or conversions air and electrical supplies (when necessary) should be connected and the product tested for proper function and leakage. If audible leakage is present, or if the product does not operate properly, do not put product or system into use.
  - Warnings and specifications on the product should not be covered or painted over. If masking is not possible, contact your local representative for replacement labels.
- 4.9. Putting Serviced System Back into Operation: Follow the guidelines above and all relevant Installation and Maintenance Instructions supplied with the valve FRL or vacuum component to insure proper function of the system.

## Global Air Preparation System

The goods, services or work (referred to as the "Products") offered by **Parker-Hannifin Corporation**, its subsidiaries, groups, divisions, and authorized distributors ("Seller") are offered for sale at prices indicated in the offer, or as may be established by Seller. The offer to sell the Products and acceptance of Seller's offer by any customer ("Buyer") is contingent upon, and will be governed by all of the terms and conditions contained in this Offer of Sale. Buyer's order for any Products specified in Buyer's purchase document or Seller's offer, proposal or quote ("Quote") attached to the purchase order, when communicated to Seller verbally, or in writing, shall constitute acceptance of this offer.

**1. Terms and Conditions.** Seller's willingness to offer Products for sale or accept an order for Products is subject to the terms and conditions contained in this Offer of Sale or any newer version of the same, published by Seller electronically at [www.parker.com/saleterms/](http://www.parker.com/saleterms/). Seller objects to any contrary or additional terms or conditions of Buyer's order or any other document or other communication issued by Buyer.

**2. Price; Payment.** Prices stated on Seller's Quote are valid for thirty (30) days, except as explicitly otherwise stated therein, and do not include any sales, use, or other taxes or duties unless specifically stated. Seller reserves the right to modify prices to adjust for any raw material price fluctuations. Unless otherwise specified by Seller, all prices are F.C.A. Seller's facility (INCOTERMS 2010). Payment is subject to credit approval and payment for all purchases is due thirty (30) days from the date of invoice (or such date as may be specified by Seller's Credit Department). Unpaid invoices beyond the specified payment date incur interest at the rate of 1.5% per month or the maximum allowable rate under applicable law.

**3. Shipment; Delivery; Title and Risk of Loss.** All delivery dates are approximate. Seller is not responsible for damages resulting from any delay. Regardless of the manner of shipment, delivery occurs and title and risk of loss or damage pass to Buyer, upon placement of the Products with the shipment carrier at Seller's facility. Unless otherwise stated, Seller may exercise its judgment in choosing the carrier and means of delivery. No deferral of shipment at Buyer's request beyond the respective dates indicated will be made except on terms that will indemnify, defend and hold Seller harmless against all loss and additional expense. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer's acts or omissions.

**4. Warranty.** Seller warrants that the Products sold hereunder shall be free from defects in material or workmanship for a period of twelve (12) months from the date of delivery or 2,000 hours of normal use, whichever occurs first. All prices are based upon the exclusive limited warranty stated above, and upon the following disclaimer: **DISCLAIMER OF WARRANTY: THIS WARRANTY IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO PRODUCTS PROVIDED. SELLER DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND IMPLIED, INCLUDING DESIGN, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

**5. Claims; Commencement of Actions.** Buyer shall promptly inspect all Products upon receipt. No claims for shortages will be allowed unless reported to the Seller within ten (10) days of delivery. No other claims against Seller will be allowed unless asserted in writing within thirty (30) days after delivery. Buyer shall notify Seller of any alleged breach of warranty within thirty (30) days after the date the defect is or should have been discovered by Buyer. Any claim or action against Seller based upon breach of contract or any other theory, including tort, negligence, or otherwise must be commenced within twelve (12) months from the date of the alleged breach or other alleged event, without regard to the date of discovery.

**6. LIMITATION OF LIABILITY.** IN THE EVENT OF A BREACH OF WARRANTY, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE A DEFECTIVE PRODUCT, OR REFUND THE PURCHASE PRICE WITHIN A REASONABLE PERIOD OF TIME. **IN NO EVENT IS SELLER LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF, OR AS THE RESULT OF, THE SALE, DELIVERY, NON-DELIVERY, SERVICING, USE OR LOSS OF USE OF THE PRODUCTS OR ANY PART THEREOF, OR FOR ANY CHARGES OR EXPENSES OF ANY NATURE INCURRED WITHOUT SELLER'S WRITTEN CONSENT, WHETHER BASED IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER'S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE OF THE PRODUCTS.**

**7. User Responsibility.** The user, through its own analysis and testing, is solely responsible for making the final selection of the system and Product and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application and follow applicable industry standards and Product information. If Seller provides Product or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products or systems.

**8. Loss to Buyer's Property.** Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, will be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer ordering the items manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.

**9. Special Tooling.** A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture Products. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the Products, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller has the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

**10. Buyer's Obligation; Rights of Seller.** To secure payment of all sums due or otherwise, Seller retains a security interest in all Products delivered to Buyer and this agreement is deemed to be a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer's behalf all documents Seller deems necessary to perfect its security interest.

**11. Improper Use and Indemnity.** Buyer shall indemnify, defend, and hold Seller harmless from any losses, claims, liabilities, damages, lawsuits, judgments and costs

(including attorney fees and defense costs), whether for personal injury, property damage, patent, trademark or copyright infringement or any other claim, brought by or incurred by Buyer, Buyer's employees, or any other person, arising out of: (a) improper selection, application, design, specification or other misuse of Products purchased by Buyer from Seller; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller's use of patterns, plans, drawings, or specifications furnished by Buyer to manufacture Products; or (d) Buyer's failure to comply with these terms and conditions. Seller shall not indemnify Buyer under any circumstance except as otherwise provided.

**12. Cancellations and Changes.** Buyer may not cancel or modify or cancel any order for any reason, except with Seller's written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage. Seller may change Product features, specifications, designs and availability.

**13. Limitation on Assignment.** Buyer may not assign its rights or obligations under this agreement without the prior written consent of Seller.

**14. Force Majeure.** Seller does not assume the risk and is not liable for delay or failure to perform any of Seller's obligations by reason of events or circumstances beyond its reasonable control (hereinafter "Events of Force Majeure"). Events of Force Majeure shall include without limitation: accidents, strikes or labor disputes, acts of any government or government agency, acts of nature, delays or failures in delivery from carriers or suppliers, shortages of materials, or any other cause beyond Seller's reasonable control.

**15. Waiver and Severability.** Failure to enforce any provision of this agreement will not invalidate that provision; nor will any such failure prejudice Seller's right to enforce that provision in the future. Invalidation of any provision of this agreement by legislation or other rule of law shall not invalidate any other provision herein. The remaining provisions of this agreement will remain in full force and effect.

**16. Termination.** Seller may terminate this agreement for any reason and at any time by giving Buyer thirty (30) days prior written notice. Seller may immediately terminate this agreement, in writing, if Buyer: (a) breaches any provision of this agreement (b) appoints a trustee, receiver or custodian for all or any part of Buyer's property (c) files a petition for relief in bankruptcy on its own behalf, or one if filed by a third party (d) makes an assignment for the benefit of creditors; or (e) dissolves its business or liquidates all or a majority of its assets.

**17. Governing Law.** This agreement and the sale and delivery of all Products are deemed to have taken place in, and shall be governed and construed in accordance with, the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to this agreement.

**18. Indemnity for Infringement of Intellectual Property Rights.** Seller is not liable for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Section. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets ("Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that a Product sold pursuant to this agreement infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If a Product is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Product, replace or modify the Product so as to make it noninfringing, or offer to accept return of the Product and refund the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller is not liable for claims of infringement based on information provided by Buyer, or directed to Products delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any Product sold hereunder. The foregoing provisions of this Section constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.

**19. Entire Agreement.** This agreement contains the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of sale. All prior or contemporaneous written or oral agreements or negotiations with respect to the subject matter are herein merged. The terms contained herein may not be modified unless in writing and signed by an authorized representative of Seller.

**20. Compliance with Laws.** Buyer agrees to comply with all applicable laws, regulations, and industry and professional standards of care, including those of the United Kingdom, the United States of America, and the country or countries in which Buyer may operate, including without limitation the U. K. Bribery Act, the U.S. Foreign Corrupt Practices Act ("FCPA"), the U.S. Anti-Kickback Act ("Anti-Kickback Act") and the U.S. Food Drug and Cosmetic Act ("FDCA"), each as currently amended, and the rules and regulations promulgated by the U.S. Food and Drug Administration ("FDA"), and agrees to indemnify and hold harmless Seller from the consequences of any violation of such provisions by Buyer, its employees or agents. Buyer acknowledges that it is familiar with the provisions of the U. K. Bribery Act, the FCPA, the FDA, and the Anti-Kickback Act, and certifies that Buyer will adhere to the requirements thereof. In particular, Buyer represents and agrees that Buyer will not make any payment or give anything of value, directly or indirectly to any governmental official, any foreign political party or official thereof, any candidate for foreign political office, or any commercial entity or person, for the purpose of influencing such person to purchase Products or otherwise benefit the business of Seller.

05/14





# Parker Worldwide

**AE – UAE, Dubai**  
Tel: +971 4 8127100  
parker.me@parker.com

**AR – Argentina, Buenos Aires**  
Tel: +54 3327 44 4129

**AT – Austria, Wiener Neustadt**  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe, Wiener Neustadt**  
Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AU – Australia, Castle Hill**  
Tel: +61 (0)2-9634 7777

**AZ – Azerbaijan, Baku**  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium, Nivelles**  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BR – Brazil, Cachoeirinha RS**  
Tel: +55 51 3470 9144

**BY – Belarus, Minsk**  
Tel: +375 17 209 9399  
parker.belarus@parker.com

**CA – Canada, Milton, Ontario**  
Tel: +1 905 693 3000

**CH – Switzerland, Etoy**  
Tel: +41 (0) 21 821 02 30  
parker.switzerland@parker.com

**CL – Chile, Santiago**  
Tel: +56 2 623 1216

**CN – China, Shanghai**  
Tel: +86 21 2899 5000

**CZ – Czech Republic, Klecany**  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany, Kaarst**  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark, Ballerup**  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain, Madrid**  
Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland, Vantaa**  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France, Contamine s/Arve**  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece, Athens**  
Tel: +30 210 933 6450  
parker.greece@parker.com

**HK – Hong Kong**  
Tel: +852 2428 8008

**HU – Hungary, Budapest**  
Tel: +36 1 220 4155  
parker.hungary@parker.com

**IE – Ireland, Dublin**  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IN – India, Mumbai**  
Tel: +91 22 6513 7081-85

**IT – Italy, Corsico (MI)**  
Tel: +39 02 45 19 21  
parker.italy@parker.com

**JP – Japan, Tokyo**  
Tel: +(81) 3 6408 3901

**KR – South Korea, Seoul**  
Tel: +82 2 559 0400

**KZ – Kazakhstan, Almaty**  
Tel: +7 7272 505 800  
parker.easteurope@parker.com

**LV – Latvia, Riga**  
Tel: +371 6 745 2601  
parker.latvia@parker.com

**MX – Mexico, Apodaca**  
Tel: +52 81 8156 6000

**MY – Malaysia, Shah Alam**  
Tel: +60 3 7849 0800

**NL – The Netherlands, Oldenzaal**  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway, Ski**  
Tel: +47 64 91 10 00  
parker.norway@parker.com

**NZ – New Zealand, Mt Wellington**  
Tel: +64 9 574 1744

**PL – Poland, Warsaw**  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal, Leca da Palmeira**  
Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania, Bucharest**  
Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia, Moscow**  
Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden, Spånga**  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SG – Singapore**  
Tel: +65 6887 6300

**SK – Slovakia, Banská Bystrica**  
Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia, Novo Mesto**  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TH – Thailand, Bangkok**  
Tel: +662 717 8140

**TR – Turkey, Istanbul**  
Tel: +90 216 4997081  
parker.turkey@parker.com

**TW – Taiwan, Taipei**  
Tel: +886 2 2298 8987

**UA – Ukraine, Kiev**  
Tel: +380 44 494 2731  
parker.ukraine@parker.com

**UK – United Kingdom, Warwick**  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**US – USA, Cleveland**  
Tel: +1 216 896 3000

**VE – Venezuela, Caracas**  
Tel: +58 212 238 5422

**ZA – South Africa, Kempton Park**  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com



Parker Hannifin Corporation  
**Pneumatic Division**  
8676 E. M89  
P.O. Box 901  
Richland, MI 49083 USA  
Tel: 269 629 5000  
Fax: 269 629 5385

Applications Engineering  
Phone: 877 321 4PDN Option #2  
E-mail: pdnapps@parker.com  
Customer Support  
Phone: 877 321 4PDN Option #1  
E-mail: pdncustsvc@parker.com  
Web site: www.parker.com/globalfrl