
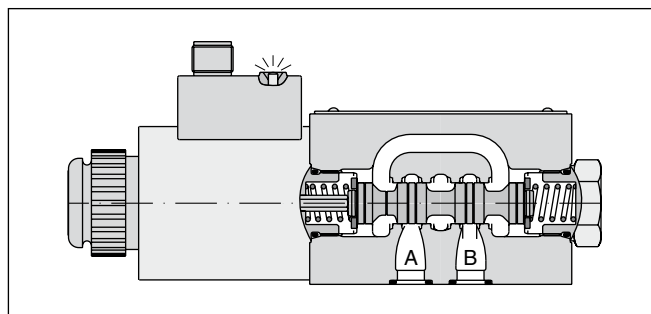


**Characteristics**

The D1VW 8 Watt series is based on the standard D1VW design. The low watt, low current (<0.5 A) solenoid allows direct connection to a PLC or a bus knot. The valves are offered with standard solenoid connection (as per EN175301-803) and M12 x 1 connection. The version with M12 x 1 connection and LEDs is conform to the DESINA standard (**D**istribut**E**d and **S**tandardised **I**nst**A**llation technology) for machine tools and manufacturing systems.




2

**Technical data**

General	
Design	Directional spool valve
Actuation	Solenoid
Size	DIN NG06 / CETOP 03 / NFPA D03
Mounting interface	DIN 24340 A6 / ISO 4401 / CETOP RP 121-H / NFPA D03
Mounting position	unrestricted, preferably horizontal
Ambient temperature	[°C] -25...+50
MTTF <sub>D</sub> value	[years] 150
Weight	[kg] 1.5 (1 solenoid), 2.1 (2 solenoids)
Vibration resistance	[g] 10 Sinus 5...2000 Hz acc. IEC 68-2-6 30 Random noise 20...2000 Hz acc. IEC 68-2-36 15 Shock acc. IEC 68-2-27
Hydraulic	
Max. operating pressure	[bar] P, A B: 350, T: 210
Fluid	Hydraulic oil in accordance with DIN 51524 ... 51525
Fluid temperature	[°C] -25 ... +70
Viscosity permitted	[cSt] / [mm <sup>2</sup> /s] 2.8...400
Viscosity recommended	[cSt] / [mm <sup>2</sup> /s] 30...80
Filtration	ISO 4406 (1999); 18/16/13
Flow max.	[l/min] 60 (see shift limits)
Leakage at 50 bar	[ml/min] Up to 10 per flow path, depending on spool
Static / Dynamic	
Step response at 95 %	[ms] Energized: 80...120; De-energized: 35...55
Electrical characteristics	
Duty ratio	100 % ED; CAUTION: coil temperature up to 70 °C possible
Max. switching frequency	[1/h] 10000
Protection class	IP 65 in acc. with EN 60529, M12x1 IP67 (each with correctly mounted plug-in connector)
Code	J
Supply voltage	[V] 24 V =
Tolerance supply voltage	[%] ±10
Current consumption	[A] 0.33
Power consumption	[W] 8
Solenoid connection	Connector as per EN 175301-803, solenoid identification as per ISO 9461 (code W). Plug M12x1 on coil as per IEC 61076-2-101 (code D).
Wiring min.	[mm <sup>2</sup> ] 3 x 1.5 recommended
Wiring length max.	[m] 50 recommended

With electrical connections the protective conductor (PE ⚡) must be connected according to the relevant regulations.

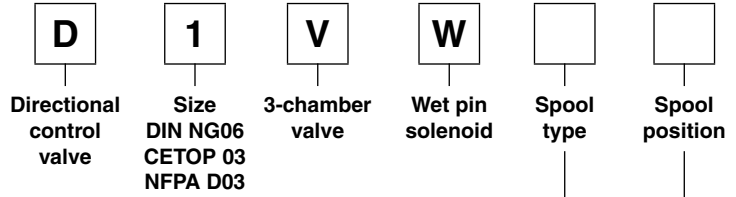

2


3 position spools	
Code	Spool type
	a   0   b
001	
002	
003	
004	
005	
006	
007	
008 <sup>1)</sup>	
009 <sup>1)</sup>	
010	
011	
014	
015	
016	
081	
082	
102	

2 position spools	
Code	Spool type
	a   b
020	
026	
030	
101	

3 position spools			
Code	Spool position		
<b>C</b>			<b>3 positions.</b> Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 008, 009	
<b>E</b>			<b>2 positions.</b> Spring offset in position "0".
	Operated in position "a".	Operated in position "b".	
<b>K</b>			<b>2 positions.</b> Spring offset in position "0".
	Operated in position "b".	Operated in position "a".	

2 position spools			
Code	Spool position		
<b>B</b>			<b>2 positions.</b> Spring offset in position "b". Operated in position "a".
<b>D <sup>2)</sup></b>			<b>2 positions.</b> Operated in position "a" or "b". No center or offset position.
<b>H</b>			<b>2 positions.</b> Spring offset in position "a". Operated in position "b".

<sup>1)</sup> Consider specific spool position.  
<sup>2)</sup> Only for spool 020 available.  
<sup>3)</sup> Please order plug separately.

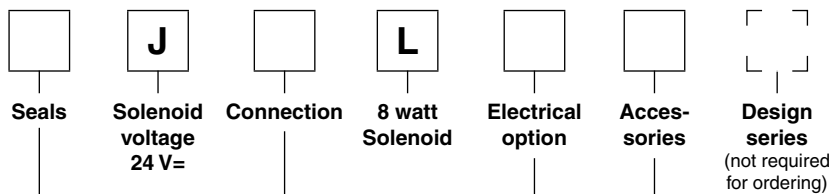

Code	Accessories
<b>omit</b>	<b>Standard valve (in combination with solenoid connection "D" and "W")</b>
5	Only in combination with solenoid connection "D" and surge diode with LED "J"

**Solenoid identification acc. to ISO 9461**

Code	Electrical option
<b>omit</b>	<b>Standard valve (in combination with solenoid connection "D" and "W")</b>
J	Surge diode with LED, max. voltage peak 50V (only available in combination with solenoid connection "D")

Code	Connection
D <sup>3)</sup>	M12x1 on coil as per IEC 61076-2-101
<b>W <sup>3)</sup></b>	<b>Connector as per EN 175301-803, without plug</b>

Code	Seals
<b>N</b>	<b>NBR</b>
V	FPM

**Bold letters =**  
Short-term availability

Further spool types on request.  
To get a DESINA valve, order the combination: JDLJ5


The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve number

for each spool type, operating position and flow direction is given in the table below.

**2**

Spool	Position „b“		Position „a“		Position „0“				
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T
001	3	3	3	3	-	-	-	-	-
002	3	4	3	4	1	1	3	3	1
003	4	4	4	5	-	-	4	-	-
004	3	4	3	4	-	-	4	4	-
005	3	3	3	3	8 (max. 30l)	-	-	-	-
006	3	4	3	4	4	4	-	-	-
007	4	3	3	3	-	2	-	1	4
010	4	-	4	-	-	-	-	-	-
011	3	3	3	3	-	-	11 (max. 25l)	11 (max. 25l)	-
014	4	3	3	3	2	-	1	-	4
015	4	5	4	4	-	-	-	4	-
016	3	3	3	3	-	8 (max. 30l)	-	-	-
020B	4	4	3	4	-	-	-	-	-
026B	4	-	4	-	-	-	-	-	-
030B	3	4	4	3	-	-	-	-	-
081	9	10	9	10	-	-	-	-	-
082	9	10	9	10	-	-	-	-	-
101B	4 (max. 40l)	7	7	6	-	-	-	-	-
102	3	4	3	4	3	3	5	5	3
	P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T
008	4	5	4	5	-	-	-	-	6
009	5	5	5	5	-	-	-	-	4

**Flow curve diagram**

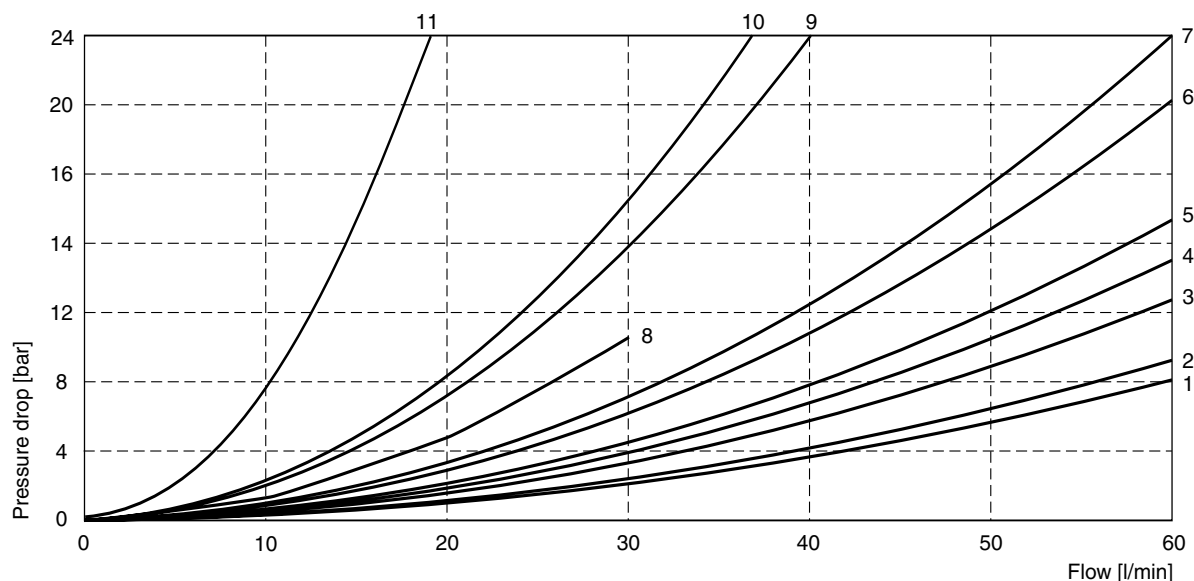


All characteristic curves measured with HLP46 at 50 °C.

The diagram below specifies the shift limits. The specifications apply to balanced flow conditions. The shift limits can be considerably lower at unbalanced flow conditions.

To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.



**Shift limits**

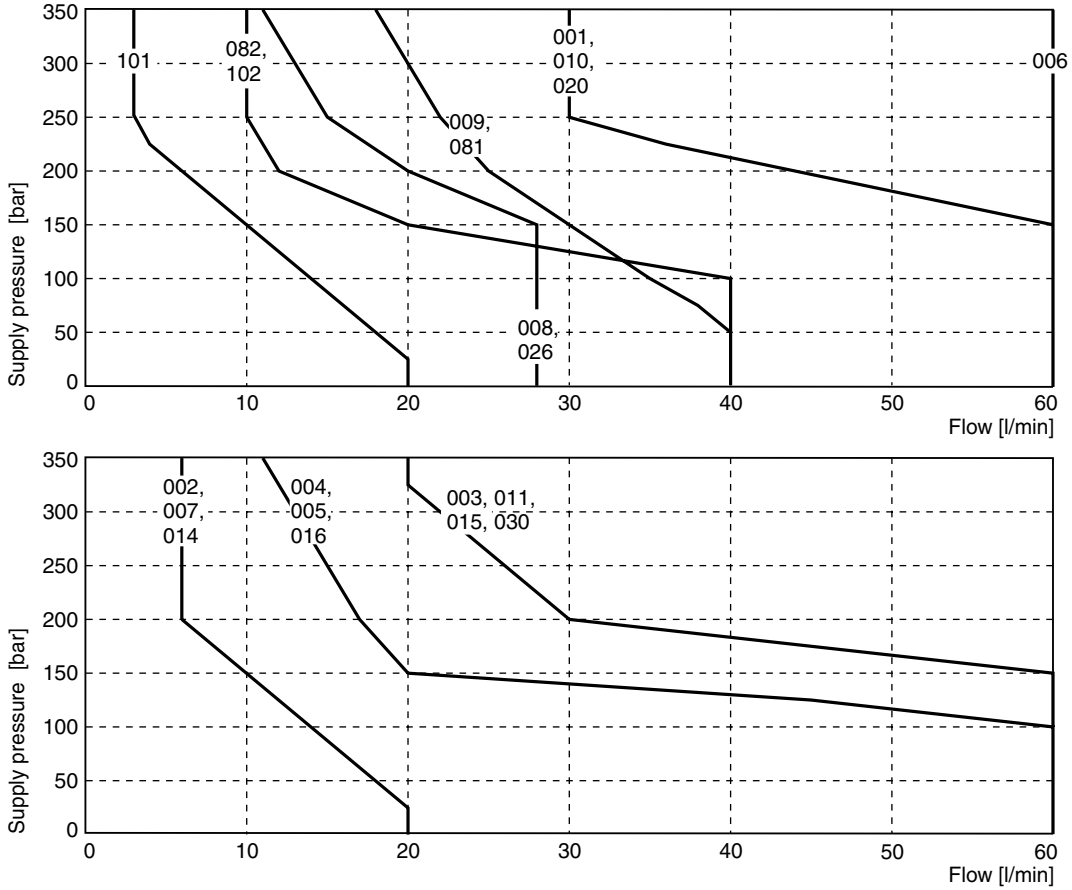

Measured with HLP46 at 50 °C, 90 %  $U_{nom}$  and warm solenoids



**M12 pin assignment DESINA design (code „JDLJ5“), Pins 1 and 2 connected**

**M12 pin assignment code “JDL“, Pins 1 and 2 not connected**

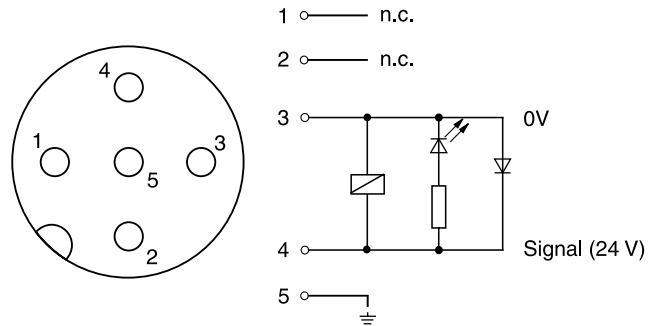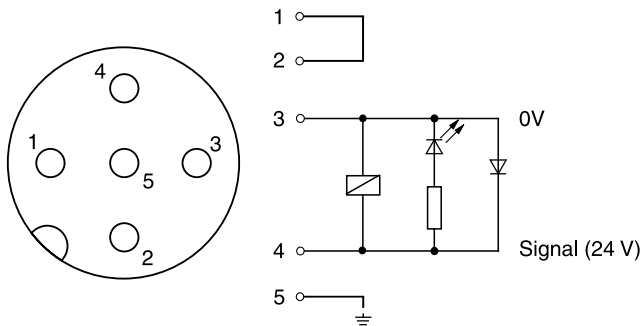


**Interface EN 175301-803, DC solenoid, JWL  
 Style B, E**

**Style H, K**

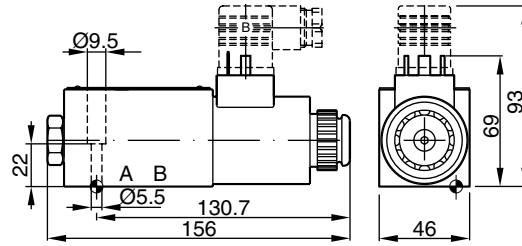
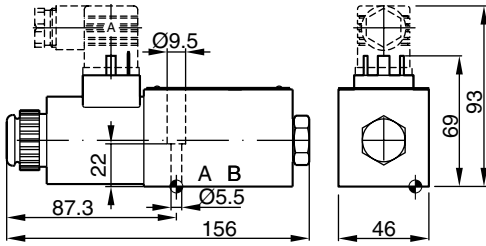


**Style C, D**


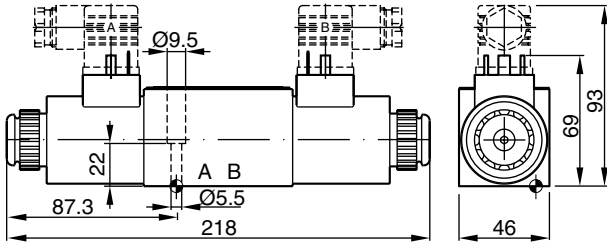


**M12x1 connector, DC solenoid, JDLJ5 (DESINA) or JDL  
 Style B, E**

**Style H, K**

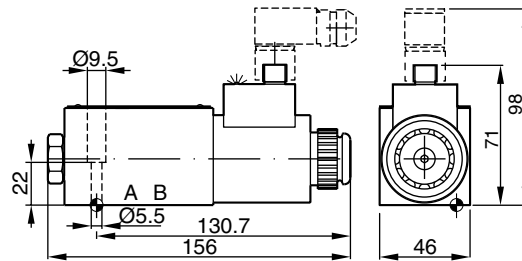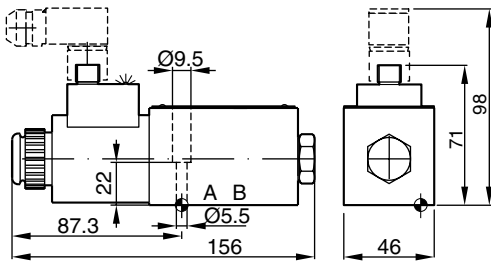

**Style C, D**

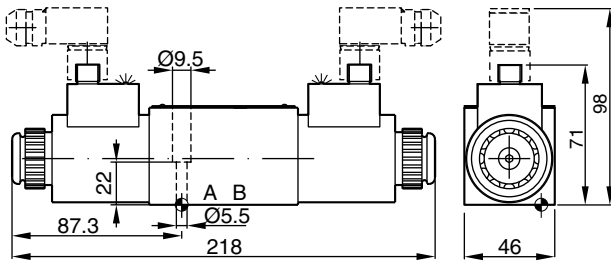

Surface finish	Kit	Kit	Kit	Kit
$\sqrt{R_{max} 6.3}$ $\square_{0.01/100}$	BK375	4x M5x30 ISO 4762-12.9	7.6 Nm $\pm 15\%$	NBR: SK-D1VW-N-91 FPM: SK-D1VW-V-91

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.  
 The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.