

INSTRUCTIONS



ALL VALVE series SBV


Applicable to fluids and refrigerants of GROUP 2 according to Directive 97/23/CE (29 May 1997) or GROUP A1 according to ANSI-ASHRAE 34-2010.

ERC

Temperature allowed range (TS): -40°C to +120°C (-40°F to +248°F)

Design Pressure (PS): 45,0 bar (653 psi)

Part 1: BRAZE VALVE

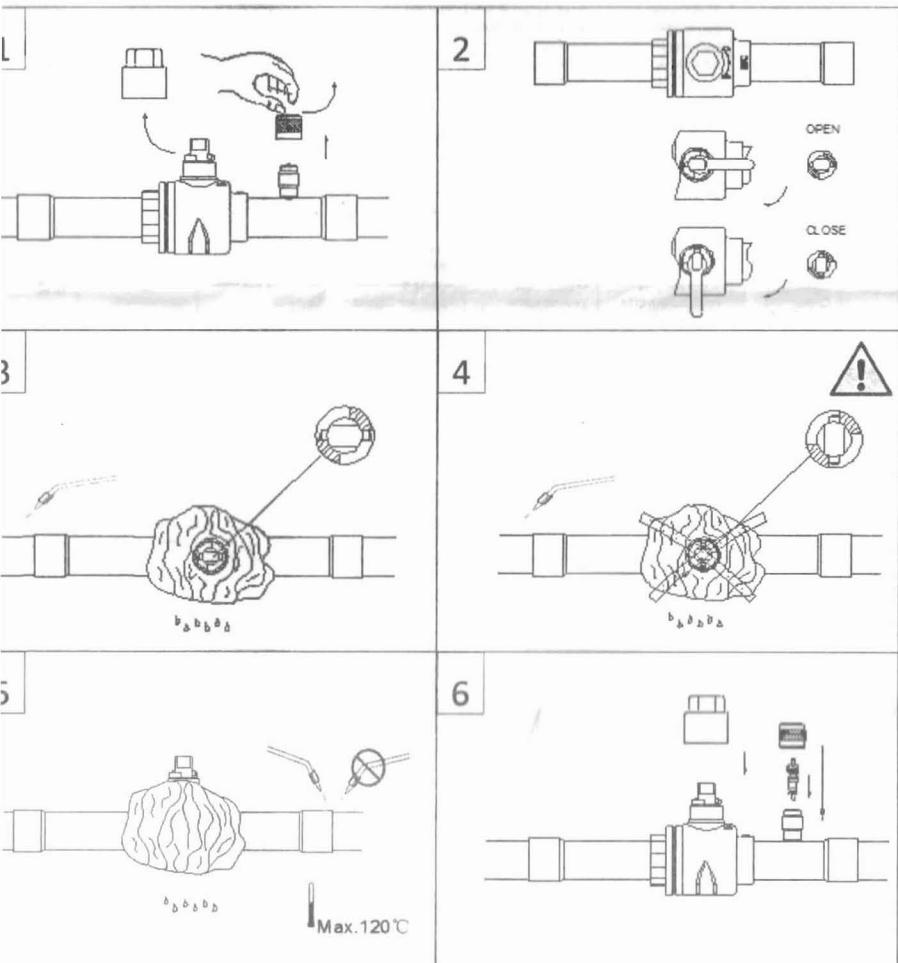

INSTRUCTIONS



PART 2: OPEN / CLOSE VALVE

