



Single-phase hot water high-pressure cleaner with Eco mode, 1-button operation, integrated tanks, Easy Press gun with soft grip, continuous servo-control pressure/water flow regulation, etc.





# AVS

#### ecolefficiency mode

Economical and environmentally friendly – even during longer periods of use.

#### 2 Large, rubber wheels and steering roller

For exceptionally easy transport.

- 3 Large tilting aid
- For easy tilting when negotiating obstacles such as steps and kerbs.
- 4 Large tank openings with integrated filling chute
- For easy filling.

### Technical Data and Equipment.

#### **KARCHER**



#### HDS 6/14 C

- Economical eco!efficiency mode
- Intuitive one-button mode selection switch
- Extensive range of standard equipment

Technical data		
Order No.		1.169-200.0
EAN code		4039784717329
Current type	Ph / V / Hz	1 / 230 / 50
Flow rate	l/h	240-560
Pressure	bar / MPa	30–140 / 3–14
Max. temperature	°C	80 / 155
Connected load	kW	3.6
Heating oil consumption, full load	kg/h	3.5
Fuel tank	1	15
Weight	kg	93
Dimensions (L x W x H)	mm	1060 × 650 × 920
Detergent tank	I	10
Equipment		
Equipment Spray gun		Easy-press trigger gun
		Easy-press trigger gun
Spray gun	m	
Spray gun Spray gun with soft grip	m mm	1
Spray gun Spray gun with soft grip High-pressure hose		■ 10 / DN 6, 250 bar
Spray gun Spray gun with soft grip High-pressure hose Spray lance		10 / DN 6, 250 bar 1050
Spray gun Spray gun with soft grip High-pressure hose Spray lance Power nozzle		■ 10 / DN 6, 250 bar 1050 ■
Spray gun Spray gun with soft grip High-pressure hose Spray lance Power nozzle Soft damping system (SDS)		■ 10 / DN 6, 250 bar 1050 ■
Spray gun Spray gun with soft grip High-pressure hose Spray lance Power nozzle Soft damping system (SDS) Anti-twist system		10 / DN 6, 250 bar     1050
Spray gun Spray gun with soft grip High-pressure hose Spray lance Power nozzle Soft damping system (SDS) Anti-twist system Pressure switch-off Integrated fuel and cleaning agent		10 / DN 6, 250 bar 1050

#### **KARCHER**

15 m high-pressure hose (M 22 x 1.5) with kink protection.

coupling. Further data: DN 8/155°C/315 bar.

With patented rotating AVS trigger gun connector and manual

### Accessories for HDS 6/14 C 1.169-200.0

15

12–13

14



16–19

12-13		15		10-13			
				Max. working			
		Order No.	ID	pressure	Length	Price	Description
Standard with unions on both side			1.5	processo	g		
High-pressure hose, 10 m, ID 8,	<b>:5</b> 1	6.391-342.0	DN 8 mm	315 bar	10 m		
315 bar, extension piece	1	0.391-342.0	DIN 6 IIIII	515 Dal	10 11		
High-pressure hose, 15 m, ID 8,	2	6.390-010.0	DN 8 mm	315 bar	15 m		—
315 bar, including rotary coupling							
High-pressure hose, 20 m, ID 8,	3	6.390-031.0	DN 8 mm	315 bar	20 m		
315 bar, extension piece							
High-pressure hose, 30 m, ID 8,	4	6.390-293.0	DN 8 mm	315 bar	30 m		
including rotary coupling							
Longlife 400 with unions on both		6.391-883.0	DN 6 mm	400 bar	10 m		With retary equipling 2 × M 22 × 4 5
High pressure hose ID 6, 10 m, including rotary coupling	5	0.391-003.0		400 bar			With rotary coupling, 2 x M 22 x 1,5
High-pressure hose Longlife 400,	6	6.388-083.0	DN 8 mm	400 bar	10 m		10 m high-pressure hose Longlife 400 (DN 8) with rotary
10 m, ID 8, including rotary coupling	Ũ	0.000 000.0	Dittonini	100 541			coupling, two layer high-strength steel wire reinforced. Con-
							nectors at both ends. M 22 x 1.5, with kink protection.
Longlife 400 high-pressure hose, 10	7	6.391-354.0	DN 8 mm	400 bar	10 m		
m, DN 8, extension piece							
High-pressure hose Longlife 400,	8	6.389-709.0	DN 8 mm	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5
15 m, ID 8, including rotary coupling High-pressure hose Longlife 400,	9	6.390-027.0	DN 8 mm	400 bar	20 m		with rotary coupling, 2 x M 22 x 1.5
20 m, ID 8, extension	9	0.390-027.0	DN 8 IIIII	400 bai	20111		with rotary coupling, 2 x w 22 x 1.5
High-pressure hose Longlife 400,	10	6.390-294.0	DN 8 mm	400 bar	30 m		With rotary coupling, 2 x M 22 x 1.5
30 m, ID 8, including rotary coupling							
High-pressure hose 1.5 m, ID 8,	11	6.390-178.0	DN 8 mm	400 bar	1.5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protec-
including connectors							tion and connectors at both ends. For connecting to hose
							reels with appropriate connector (M 22 x 1.5).
Food industry version with unions		6.389-479.0	DN 8 mm	250 bar	10 m	1	40 as high assessment have (DN 0) with assessed (estation) AV(0
High-pressure hose, 10 m, DN 8, suitable for the food industry, exten-	12	0.389-479.0	DIN 8 mm	250 bar	10 m		10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in
sion piece							the food industry. M 22 x 1.5 with anti-kink sleeve.
High-pressure hose, 20 m, ID 8,	13	6.389-581.0	DN 8 mm	250 bar	20 m		20 m high-pressure hose (DN 8) with swivel coupling.
suitable for food industry, extension							Non-discolouring outer layer for use in the food industry.
piece							Connectors at both ends, M 22 x 1.5, with kink protection. NW
							8/155°C/250 bar.
Longlife food design with screw c		1	1	100 1	40		
High pressure hose food ID 8, 10 m	14	6.391-864.0	DN 8 mm	400 bar	10 m		Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With
High-pressure hose food industry	15	6.391-887.0	DN 8 mm	400 bar	20 m		rotary coupling, 2 x M 22 x 1,5
400 bar, 20 m, ID 8, including rotary coupling							
Standard		I					
High-pressure hose, 10 m, ID 6,	16	6.391-238.0	DN 6 mm	250 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection.
AVS trigger gun connector		0.001 200.0	Dittonini	200 54			With patented rotating AVS trigger gun connector and manual
							coupling. Further data: DN 6/155°C/250 bar.
High-pressure hose, 10 m, ID 6,	17	6.391-875.0	DN 6 mm	300 bar	10 m		With patented AVS connection in the trigger gun (pivot-mount
300 bar, AVS trigger gun connec-							ed) and hand screw union. M 22 x 1.5 with anti-kink protec-
tion	40	0.000.005.0	DNIA	045 hz	10 -		tion. NW 6/155°C/300 bar
High-pressure hose, 10 m, ID 8, AVS trigger gun connector	18	6.390-025.0	DN 8 mm	315 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual
							coupling. Further data: DN 8/155°C/315 bar.
High-pressure hose, 15 m, ID 8,	19	6.390-185.0	DN 8 mm	315 bar	15 m		15 m high-pressure hose (M 22 x 1.5) with kink protection.

■ Included in delivery. □ Available accessories. ▲ Extension hose.

AVS trigger gun connector

High-pressure hose, 15 m, ID 8,








		1				 	
		Order No.	ID	Max. working pressure	Length	Price	Description
High-pressure hose, 20 m, ID 8, AVS trigger gun connector	20	6.390-171.0	DN 8 mm	315 bar	20 m		20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.
Longlife 400							
Longlife 400 high-pressure hose, 10 m, DN 6, M 22 x 1.5	21	6.391-882.0	DN 6 mm	400 bar	10 m		With patented AVS connection in the trigger gun (pivot-mount- ed).
Longlife 400 high-pressure hose, 10 m, DN 8,	22	6.391-351.0	DN 8 mm	400 bar	10 m		
High-pressure hose Longlife 400, 20 m, DN 8, AVS trigger gun con- nector	23	6.390-208.0	DN 8 mm	400 bar	20 m		20 m high-pressure hose Longlife 400 (DN 8) with patented (rotating) AVS trigger gun connector and manual coupling. Two layer high-strength steel wire reinforced.
Food industry version							
High-pressure hose, 15 m, ID 6, AVS trigger gun connector 11 mm, suitable for food industry, grey	24	6.391-654.0	DN 6 mm	250 bar	15 m		15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.
High-pressure hose, 10 m, DN 8, AVS trigger gun connection, food, grey	25	6.390-704.0	DN 8 mm	250 bar	10 m		Food industry version, AVS connection in the trigger gun. grey NW 8/155 °C/250 bar
High-pressure hose, 20 m, ID 8, AVS trigger gun connector, suitable for food industry, grey	26	6.390-705.0	DN 8 mm	250 bar	20 m		20 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. NW 8/155°C/250 bar.
Longlife food design							
HIgh-pressure hose Longlife 400, 15 m, ID 6, AVS trigger gun con- nection	27	6.391-888.0	DN 6 mm	400 bar	15 m		Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted)
HIgh-pressure hose Longlife 400, 10 m, ID 8, AVS trigger gun con- nection	28	6.391-885.0	DN 8 mm	400 bar	10 m		
HIgh-pressure hose Longlife 400, 20 m, ID 8, AVS trigger gun con- nection	29	6.391-886.0	DN 8 mm	400 bar	20 m		
Special hoses							
High-pressure hose 1.5 m, ID 8, including connectors, outlet bend	30	6.388-886.0	DN 8 mm	400 bar	1.5 m		C



		Order No.	Flow rate			Price	Description
Easy Press high-pressure trigger	gun w	ith holding force	e reduction (Kärd	her patent)			
Easy Press HP trigger gun with soft grip	1	4.775-463.0					Easy press high-pressure trigger gun with softgrip. For high-pressure hoses DN 6 and DN 8 with 11 mm swivel diameter. ■
Easy Press HP trigger gun with soft grip, M22 x 1.5	2	4.775-466.0					Easy press high-pressure trigger gun with integrated adapter for connecting to high-pressure hoses M 22 x 1.5.
Servo control							
Servo control	3	4.775-526.0	0–750 l/h				Servo control for water flow and pressure control (< 750 l/h) on trigger gun.
Trigger guns							
High-end HP trigger gun	4	4.775-823.0					
Quick connect							· · · · · · · · · · · · · · · · · · ·
Quick coupling	5	6.401-458.0					For quick change of different spray lances and accessories. Optimum adaption to Kärcher accessories, especially for connection between trigger gun and spray lance. With M22 x 1,5 female.
Male coupling	6	6.401-459.0					Hardened stainless steel nipple for quick coupling 6.401-458. With M22 x 1,5 male. $\hfill \Box$

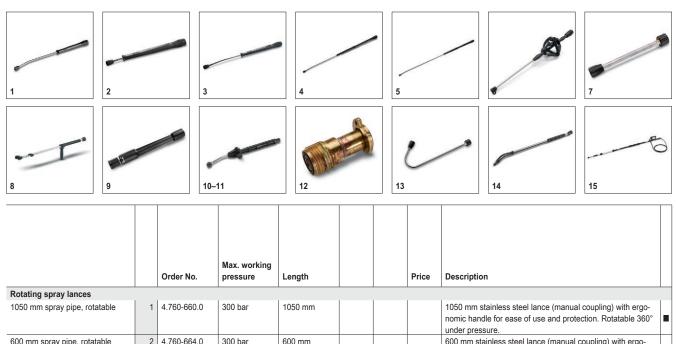

		Order No.	Max. working pressure	Length		Price	Description	
Rotating spray lances								
1050 mm spray pipe, rotatable	1	4.760-660.0	300 bar	1050 mm			1050 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360° under pressure.	
600 mm spray pipe, rotatable	2	4.760-664.0	300 bar	600 mm			600 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360° under pressure.	
850 mm spray pipe, rotatable	3	4.760-663.0	300 bar	850 mm			850 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360° under pressure.	
1550 mm spray pipe, rotatable	4	4.760-661.0	300 bar	1550 mm			1550 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360° under pressure.	
2050 mm spray pipe, rotatable	5	4.760-662.0	300 bar	2050 mm			2050 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lances								
Vibrasoft lance	6	6.415-951.0	250 bar	950 mm			The spring-loaded 360° loop handle significantly reduces the vibrations on the spray lance, reducing the physical burden on the user, e.g. when working with the dirt blaster.	
Spray lance			1	1				
250 mm lance, non-rotatable	7	4.760-667.0		250 mm			250 mm stainless steel lance. With manual coupling. Non-ro- tatable.	
Double lance			1	1				
Double lance 960 mm	8	6.394-665.0	310 bar	960 mm			960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use ( e.g. stable cleaning).	
Variable pressure spray lance								
Variable pressure spray lance, 280 mm.	9	4.760-387.0		280 mm			With integral pressure gauge for infinitely variable pressure control directly on lance. Nozzle connection M 24 x 1.5. Chemical feed in low pressure mode. Variable pressure lance and Kärcher Power nozzle.	
Variable pressure spray lance	10	4.760-362.0		670 mm			670 mm variable pressure lance with integrated pressure gauge. Variable pressure adjustment on the handle. Nozzle connector: M 24 x 1.5. Low pressure detergent application.	
Variable pressure lance	11	4.760-230.0		1040 mm			1040 mm pressure adjustable lance with integrated pressure gauge. Variable pressure adjustment on the handle. Nozzle connector: M 24 x 1.5. Low pressure detergent application.	
Adapter for variable pressure spra	ay lane	ce						
Adapter for variable pressure lance	12	4.762-075.0					For items 4.760-230 and 4.760-362 for mounting accessories to lance, M 24/18 x 1.5	
Angular spray lance								
Spray lance for toilets and rain gutters	13	4.760-073.0					Stainless steel lance WC and gutter with nozzle insert. Spe- cially shaped for effective and hygienic cleaning of gutters and toilets.	
Flexible spray lance								
Flexible lance 1050 mm	14	6.394-654.0	210 bar	1050 mm			1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	
Telescopic spray lance								
Telescopic spray pipe	15	6.394-690.0	225 bar					
Strap for telescopic spray pipe	16	6.373-987.0					Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	




		Order No.	Max. working pressure	Length		Price	Description
Gutter cleaning lance	17	2.642-305.0					The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can
Undercarriage spray lance Underbody lance	18	4.760-245.0		700 mm			be cleaned without removing the cover plates. Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.

### **KARCHER**



		Order No.	Flow rate			Price	Description
Inno Foam Kit							
Inno Foam Set with detergent injector	1	2.640-151.0					High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and
Inno Foam Set	2	2.640-692.0					stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.
Easy Foam Set							
Easy Foam Set with RM injector	3	2.640-691.0					HP foam system for use with. HD/HDS units for cleaning and
Easy Foam Set	4	2.640-693.0					disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.
Cup foam lance							· · · · · · · · · · · · · · · · · · ·
Cup foam lance	5	6.394-668.0	1200 l/h				Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.
1-litre cleaning agent container for foam lance	6	6.414-954.0					C C
Nozzle kits for Inno/Easy Foam Se	ət				·		
Nozzle kit 055 for Inno / Easy Set 500–600 l/h	7	2.640-870.0	500–600 l/h				Optimal adaptation to different machine outputs for economic use.
Foam nozzle mounting kit							
Foam nozzle attachment kit	8	2.637-926.0					Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application [ times are necessary.



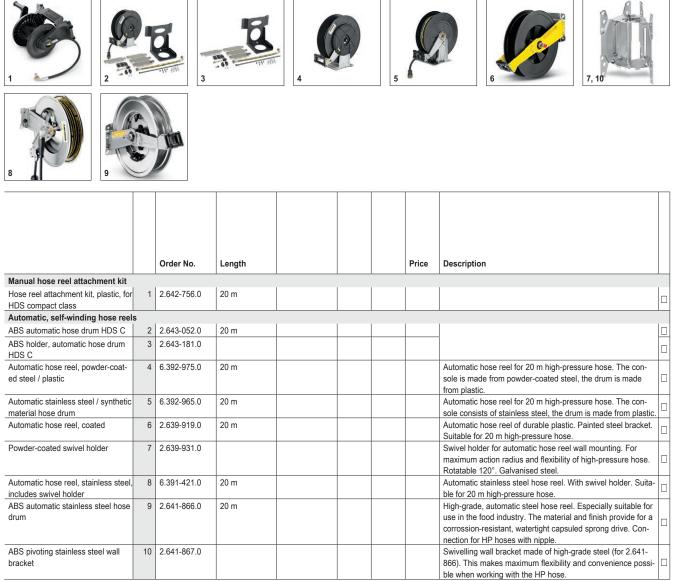

### **KARCHER**


# Accessories for HDS 6/14 C 1.169-200.0

				-5	6-1			
		Order No.				Price	Description	
Cleaning agent injector Cleaning agent injector for high	1	3.637-170.0				1	Cleaning agent dosage at high pressure 3 - 5 %	
pressure (without nozzle)	2							
Cleaning agent injector for high and low pressure (without nozzles)							Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	
Machine-specific nozzle kit with or		1				1		1
Machine-specific nozzle kit with order no. 3.637-170, HDS 500–700 I/h	3	4.769-046.0					For HDS 500 - 700 l/h. Consists of nozzle insert + HP power nozzle + union	
Nozzle insert with order no. 3.637-	001.0					1		
Nozzle insert with order no. 3.637- 001.0, high pressure for machines up to 1,100 l/h	4	4.769-003.0					Nozzle insert for detergent injector 3.637-001 for high-pres- sure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	
Nozzle insert with order no. 3.637- 001, low pressure for devices up to 1,100 l/h	5	4.769-001.0					For low pressure with machines up to 1.100 l/h	
Nozzle union		1					1	
Nozzle connector	6	5.401-210.0					For protecting and connecting Kärcher power nozzles to spray lances (M 18 x 1.5 IG).	
Nozzle union food industry Spacer (including nozzle union)	/	5.401-318.0					Made of special brass alloy for use in the food industry.	
Spacer (includes nozzle screws)	8	5.394-294.0					Guarantees constant safety clearance, e.g. for tyres and bodywork. Helps prevent damage to sensitive surfaces. Mounts directly to lance.	
Rotary coupling Rotary coupling	9	4.401-091.0					Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector M 22 x 1.5 m. With grip protection.	
Coupling Coupling	10	4.403-002.0					Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.	
Connector			1	1		1		1
Nozzle screws / screw socket	11	4.402-022.0					Nozzle connector/screw connector for connecting high-pres- sure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	
Adapters								
Adapter M 22 – Swivel	12	4.424-004.0					M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connec- tion.	
Flue pipe		<u> </u>						-
Flue gas adapter	40	4.656-149.0					Flue gas adapter with draught damper for flue pipe connection	

HDS 6/14 C, 1.169-200.0, 2015-03-23



		1		1			1	
		Order No.				Price	Description	
		Order No.				Price	Description	
Crane lifting kit								
Crane loading attachment kit for	1	2.642-638.0						
HDS compact class								
Flame monitoring attachment kit								
Flame monitoring attachment kit for	2	2.642-711.0						
HDS compact class								
			vtoncion hoco					

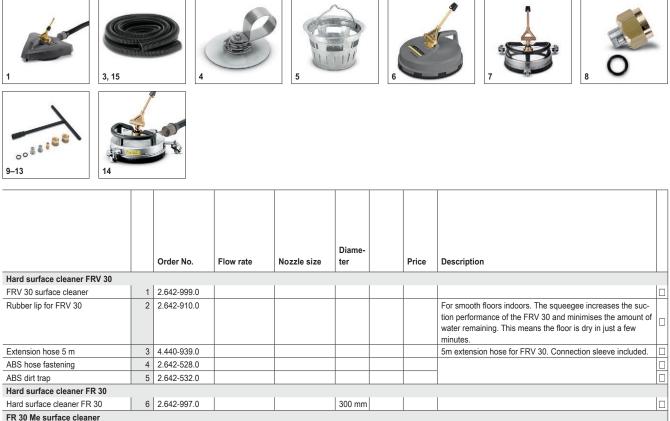

neo ant trap	U 0	2.012 002.0				
Hard surface cleaner FR 30						
Hard surface cleaner FR 30	6	2.642-997.0			300 mm	
FR 30 Me surface cleaner						
Hard surface cleaner FR 30 Me	7	2.640-355.0			300 mm	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.
Machine-specific nozzle kits for F	R					
Nozzle kit for surface cleaners	8	2.640-401.0	500–650 l/h			Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (500 to 650 l/h).
Machine-specific nozzle kits for F	RV					
Nozzle kit 035 – for FRV 30	9	2.642-430.0		35		[
Nozzle kit 040 – for FRV 30	10	2.642-431.0		40		[
Nozzle kit 045 – for FRV 30	11	2.642-432.0		45		
Nozzle kit 050 – for FRV 30	12	2.642-433.0		50		[
Nozzle kit 080 – for FRV 30	13	2.642-982.0		80		[
FRV 30 Me surface cleaner						
FRV 30 Me	14	2.642-911.0				[
FRV 30 Me extension hose	15	4.441-040.0				[

■ Included in delivery. 
□ Available accessories. ▲ Extension hose.

#### **KARCHER**

### **KARCHER**



		1	1	r		 	1 · · · · · · · · · · · · · · · · · · ·
		Order No.	Max. working	Nozzle size	Diame- ter	Price	Description
Provide address and a							
Barrel and tank cleaning Barrel cleaner – BC 14/12	1	2.641-740.0	120 bar				The BC 14/12 is an spray system for the efficient interior cleaning of containers and barrels##, specially oak barrels with a volume of between 225 and 600 litres. One cleaning cycle is completed within 36 seconds and every spot in the container is covered by a water jet. After cleaning is finished the BC 14/12 can easily and conveniently take up the dirty water. The transformer included with the BC 14/12 makes it possible to use it worldwide (110 - 240 V, 50 - 60 Hz). The nozzle kits included make possible use with high-pressure cleaners with a water volume of 600 to 1400 I / h. Electrical components are protected in accordance with IP 55.
Pipe cleaning hose, ID 6				1			
Pipe cleaning hose, NW 6, 20 m	2	6.390-028.0	120 bar				The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).
Pipe cleaning hose, ID 6, 30 m	3	6.390-029.0	120 bar				30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).
Pipe cleaning hose, NW 6, 20 m, 250 bar	4	6.390-030.0	250 bar				The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).
Pipe cleaning nozzle			1		1	1	[······2].
Pipe cleaning dirt blaster D 25 / 040	5	6.415-944.0		40	25 mm		The forward-tilted rotating pencil jet removes the most stub-
Pipe cleaning dirt blaster D 30 / 040	6	6.415-946.0		40	30 mm		born dirt. The three backwards-tilted jets ensure the neces-
Pipe cleaning dirt blaster D 35 / 040	7	6.415-948.0		40	35 mm		sary forward movement, as well as convenient handling.
Pipe cleaning nozzle	8	5.763-015.0		55	16 mm		16 mm pipe cleaning nozzle with internal thread. Various jet
	9	5.763-016.0		60	16 mm		directions for environmentally-friendly cleaning of blocked drains and pipes.
	10	5.763-017.0		50	30 mm		Pipe cleaning nozzle with inner thread. Different spray direc- tions. The hose moves freely through the pipe. (R 1/8" con- nection, 3 x 30° backwards, diameter 30 mm.)
Rotating pipe cleaning nozzle	11	6.415-428.0		50	16 mm		Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection.



		Order No.	Nozzle size		Price	Description
HP nozzle spray angle 0°						· · · · · ·
High-pressure nozzle spray angle °0	1	2.884-533.0	40			High-pressure nozzle with powerful jet for extremely stubborn dirt.
Power nozzle spray angle 15°						
Power nozzle spray angle 15°	2	2.885-225.0	36			
Power nozzle spray angle 25°						
25° power nozzle for applying cleaning agent	3	2.884-521.0	250			
Power nozzle spray angle 40°						
Power nozzle spray angle 40°	4	2.884-522.0	40			Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.



		0.1.1				<b>D</b> ure for the
		Order No.	Nozzle size		Price	Description
Wet blasting attachment (without	nozzle	e)				
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0				Paint, rust and scale removal made easy: Kärcher wet blast- ing attachment with flow control for adding blasting abrasive to the high-pressure jet.
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0				Paint, rust and scale removal made easy: Kärcher wet blast- ing attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.
Nozzle kits for wet jet unit						
Nozzle kit for wet jet unit 040	3	2.637-900.0	40			Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.
Boron carbide nozzle						
Boron carbide nozzle, for machines up to 1,000 l/h	4	6.415-084.0	6 mm			In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.



		Order No.	Max. working pressure	Nozzle size			Price	Description	
Dirt Blaster, small								· · · · · · · · · · · · · · · · · · ·	
Dirt blaster	1	4.767-023.0	180 bar	40				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 180 bar, 18 MPa, 60°C.	
Dirt blaster, large									
Dirt blaster – without changeover function	2	4.763-252.0	300 bar	40				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	
Dirt blaster - with changeover to	low pr	essure cleaning	agent intake						
PCH / rotary nozzle 040, cleaning agent changeover	3	4.763-950.0	300 bar	40				Dirt blaster – rotating pencil jet – 10x cleaning power. Ceramic nozzle and bearing ring for long service life. Changeover to detergent intake (low pressure) max. 300 bar/30 MPa, 85 °C	
Dirt blaster with changeover to fa	n jet								
Dirt blaster with changeover to fan jet	4	4.763-956.0	300 bar	40				Dirt blaster – rotating pencil jet – 10x cleaning power. Ceramic nozzle and bearing ring for long service life. Changeover to high-pressure fan jet max. 300 bar/30 MPa, 85 °C	







		Order No.	Length	Diameter		Price	Description
Starting current limiter							1
Starting current limiter	1	2.637-495.0					Reduces starting current in single-phase supply and protects line fuse.
Geka coupling							
Geka connector with hose barb, R 1/2"	2	6.388-461.0					with hose liner
Geka connector with hose barb, R 3/4"	3	6.388-455.0					C
Geka connector with hose barb, R 1"	4	6.388-465.0					[
Geka connector with inner thread, R 1"	5	6.388-458.0					with female thread
Suction filter							
Water suction filter	6	6.414-956.0					[
Suction filter with check valve	7	4.730-012.0					Brass suction filter suitable for ponds, storage tanks, etc. With check valve.
Water fine filter							
Water fine filter, with adapter	8	4.730-102.0					Fine-mesh water filter, $125 \mu$ m, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles con- tained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".
Water fine filter, 100 µm, R 1"	9	2.638-270.0					Fine-mesh water filter, 100 μm, max. temperature 60°C. Connects to high-pressure cleaner. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connector 1".
Water supply hose							
Water supply hose	10	4.440-038.0	7.5 m				NW 13 R1" / R 3/4", up to 30 °C
	11	4.440-207.0	7.5 m				NW 19 R1" / R 3/4", up to 85 °C, for pick-up
	12	4.440-270.0	7.5 m				NW 19 R1" / R1", up to 85 °C



		Order No.	Flow rate				Price	Description	
Push-on washing brush									_
Push-on washing brush	1	4.762-016.0						Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 x 1.6.	
Rotating washing brush									
Rotating wash brush for < 800 l/h machines, natural hair bristles	2	4.762-560.0	500–800 l/h						
Rotating wash brush for < 800 l/h machines, nylon bristles	3	4.762-561.0	500–800 l/h					The rotating wash brush gently removes fine dust and grime from all surfaces. Heat-resistant up to 80°C. (M 18 x 1.5, replaceable brush insert).	