

SKYAIR

R32 Non-Inverter Single-Split

Ceiling Concealed **NEW**



Indoor	FDMC50AV1M	FDMC60AV1M	FDMC85AV1M	FDMC100AV1M
Outdoor	RC50AV1M	RC60AV1M	RC85AV1M	RC100AV1M
Rated Cooling Capacity, Btu/hr	18,500	23,500	30,000	36,000
COP, W/W	3.10	3.01	3.17	3.30
CSPF, Wh/Wh	3.29	3.20	3.37	3.50

Indoor	FDMC125AV1M	FDMC140AV1M	FDMC160AV1M
Outdoor	RC125AY1M	RC140AY1M	RC160AY1M
Rated Cooling Capacity, Btu/hr	42,000	48,000	55,000
COP, W/W	3.36	3.43	2.80*
CSPF, Wh/Wh	3.57	3.64	2.97*

Note : * Subject to change.

SKYAIR

R32 Inverter Single-Split

Wall Mounted



Indoor	FAA100BVMA	
Outdoor	RZF100CVM	RZF100CYM
Rated Cooling Capacity (Min-Max), Btu/hr	34,100 (17,100-38,200)	
COP, W/W	2.78	
CSPF, Wh/Wh	4.05	

R32 Non-Inverter Single-Split

Ceiling Cassette **NEW**



Indoor	FCC50AV1M	FCC60AV1M	FCC85AV1M
Outdoor	RC50AV1M	RC60AV1M	RC85AV1M
Rated Cooling Capacity, Btu/hr	18,500	24,000	30,000
COP, W/W	3.23	3.30	3.24
CSPF, Wh/Wh	3.43	3.50	3.44

Indoor	FCC100AV1M	FCC125AV1M	FCC140AV1M
Outdoor	RC100AV1M	RC125AY1M	RC140AY1M
Rated Cooling Capacity, Btu/hr	36,000	42,000	48,000
COP, W/W	3.35	3.40	3.43
CSPF, Wh/Wh	3.56	3.61	3.64

SKYAIR

R32 Inverter Single-Split

Ceiling Exposed




Indoor	FHA50BVMA	FHA60BVMA	FHA71BVMA	
Outdoor	RZF50CVM	RZF60CVM	RZF71CVM	RZF71CYM
Rated Cooling Capacity (Min-Max), Btu/hr	17,100 (10,900-19,100)	20,500 (10,900-20,500)	24,200 (10,900-27,300)	
COP, W/W	4.17	3.92	3.09	
CSPF, Wh/Wh	6.30	6.11	5.91	

Indoor	FHA100BVMA		FHA125BVMA	
Outdoor	RZF100CVM	RZF100CYM	RZF125CVM	RZF125CYM
Rated Cooling Capacity (Min-Max), Btu/hr	34,100 (17,100-38,200)		42,700 (19,500-47,800)	
COP, W/W	3.09		2.91	
CSPF, Wh/Wh	5.17		5.09	

Indoor	FHA140BVMA	
Outdoor	RZF140CVM	RZF140CYM
Rated Cooling Capacity (Min-Max), Btu/hr	47,800 (21,200-52,900)	
COP, W/W	2.59	
CSPF, Wh/Wh	4.78	

Ceiling Concealed

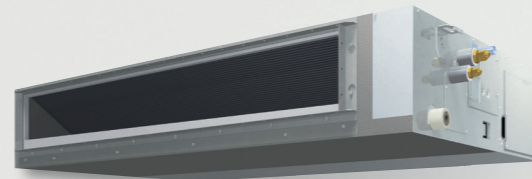

Indoor	FBA50BVMA	FBA60BVMA	FBA71BVMA	
Outdoor	RZF50CVM	RZF60CVM	RZF71CVM	RZF71CYM
Rated Cooling Capacity (Min-Max), Btu/hr	17,100 (10,900-19,100)	20,500 (10,900-20,500)	24,200 (10,900-20,500)	
COP, W/W	3.70	3.66	3.30	
CSPF, Wh/Wh	5.51	5.30	5.19	

Indoor	FBA100BVMA		FBA125BVMA	
Outdoor	RZF100CVM	RZF100CYM	RZF125CVM	RZF125CYM
Rated Cooling Capacity (Min-Max), Btu/hr	34,100 (17,100-38,200)		42,700 (19,500-47,800)	
COP, W/W	3.32		2.82	
CSPF, Wh/Wh	4.88		4.70	

Indoor	FBA140BVMA	
Outdoor	RZF140CVM	RZF140CYM
Rated Cooling Capacity (Min-Max), Btu/hr	47,800 (21,200-52,900)	
COP, W/W	2.46	
CSPF, Wh/Wh	4.47	



R-32

Residential and SkyAir R32 Air Conditioners



Air Specialist™

www.daikin.com.my

DAIKIN MALAYSIA SALES & SERVICE SDN. BHD.

Head Office: Tel: 03-7953 8388 Fax: 03-7956 4371

Email: sales_enquiry@daikin.com.my, customer_service@daikin.com.my

- Branches:
- Kedah Tel: 04-730 5670
 - Penang Tel: 04-331 1670
 - Perak Tel: 05-548 2307
 - Negeri Sembilan Tel: 06-768 8969
 - Melaka Tel: 06-288 1133
 - Johor Tel: 07-557 7788
 - Pahang Tel: 09-567 6778
 - Kelantan Tel: 09-747 4578
 - Sabah Tel: 088-722 194
 - Sarawak Tel: 082-333 299

Authorized dealer:


RASA-0219-A-L

RESIDENTIAL

R32 Inverter Single-Split

Wall Mounted

FTKM SERIES **NEW**

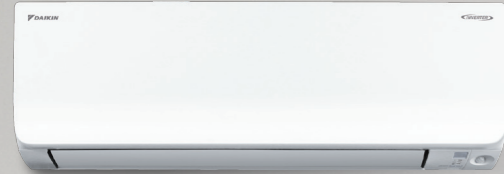

Indoor	FTKM25TVMM	FTKM35TVMM	FTKM50TVMM
Outdoor	RKM25TVMM	RKM35TVMM	RKM50TVMM
Rated Cooling Capacity (Min-Max), Btu/hr	8,500 (4,100-12,300)	11,900 (4,100-14,000)	17,700 (4,100-21,200)
COP, W/W	4.81	3.89	4.19
CSPF, Wh/Wh	7.4	6.53	6.73

Indoor	FTKM60TVMM	FTKM71TVMM
Outdoor	RKM60TVMM	RKM71TVMM
Rated Cooling Capacity (Min-Max), Btu/hr	20,500 (4,100-24,200)	24,200 (4,100-28,000)
COP, W/W	3.95	3.14
CSPF, Wh/Wh	6.21	5.87

SMARTO - FTKH-A SERIES **NEW**



Indoor	FTKH28AV1L	FTKH35AV1L	FTKH50AV1L
Outdoor	RKU28FV1D	RKU35FV1D	RKU50FV1D
Rated Cooling Capacity (Min-Max), Btu/hr	9,700 (3,700-11,600)	12,100 (4,000-13,000)	19,000 (6,000-21,200)
COP, W/W	3.95	3.77	3.55
CSPF, Wh/Wh	6.4	6.31	5.75

FTKU-A SERIES **NEW**



Indoor	FTKU28AV1L	FTKU35AV1L	FTKU50AV1L
Outdoor	RKU28FV1D	RKU35FV1D	RKU50FV1D
Rated Cooling Capacity (Min-Max), Btu/hr	9,700 (3,700-11,600)	12,100 (4,000-13,000)	19,000 (6,000-21,200)
COP, W/W	3.84	3.62	3.50
CSPF, Wh/Wh	5.60	5.60	5.60

Indoor	FTKU60AV1L	FTKU71AV1L
Outdoor	RKU60FV1D	RKU71FV1D
Rated Cooling Capacity (Min-Max), Btu/hr	22,500 (6,600-24,500)	24,000 (6,600-24,500)
COP, W/W	3.68	3.58
CSPF, Wh/Wh	6.30	6.00

RESIDENTIAL

R32 Inverter Single-Split

FTKQ SERIES **NEW**



Indoor	FTKQ25TVMM	FTKQ35TVMM	FTKQ50TVMM	FTKQ60TVMM
Outdoor	RKQ25TVMM	RKQ35TVMM	RKQ50TVMM	RKQ60TVMM
Rated Cooling Capacity (Min-Max), Btu/hr	9,000 (3,400-9,900)	12,300 (4,400-13,000)	17,100 (4,800-18,400)	20,500 (5,800-20,500)
COP, W/W	3.27	3.00	2.89	2.71
CSPF, Wh/Wh	5.5	5.5	5.2	5.2

R32 Non-Inverter Single-Split

Wall Mounted

FTV-Q SERIES



Indoor	FTV28QV1I	FTV35QV1I	FTV50QV1I	FTV60QV1I
Outdoor	RV28FV1P	RV35FV1R	RV50CV1P	RV60CV1P
Rated Cooling Capacity, Btu/hr	9,500	12,000	18,000	22,000
COP, W/W	11.05	11.11	9.81	10.68
CSPF, Wh/Wh	3.28	3.29	3.05	3.09


FTV-P SERIES



Indoor	FTV28PV1L	FTV35PV1L	FTV50PV1L	FTV60PV1L
Outdoor	RV28FV1P	RV35FV1R	RV50CV1P	RV60CV1P
Rated Cooling Capacity, Btu/hr	9,500	12,000	18,000	22,000
COP, W/W	11.05	11.11	9.81	10.68
CSPF, Wh/Wh	3.28	3.29	3.05	3.09

RESIDENTIAL


R32 Inverter Multi-Split

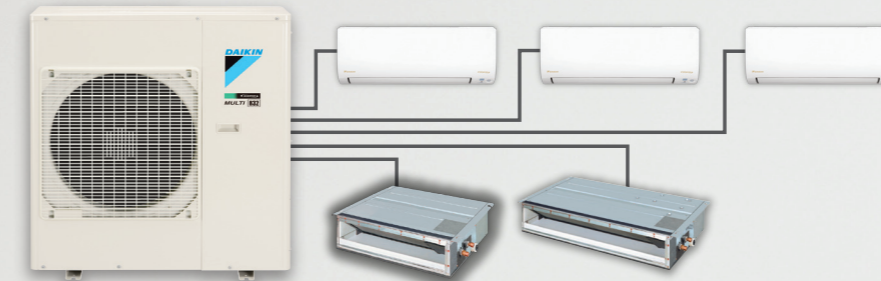

Outdoor	MKM65PVM	MKM80PVM	MKM95PVM	MKM105PVM
Rated Cooling Capacity, KW	6.5	7.6	9.2	10.5
COP, W/W	4.92	4.90	4.32	4.30
Max. Connectable Indoor Units	4	4	4	5

Indoor			2.5kW class	3.5kW class	4.2kW class	5.0kW class	6.0kW class	7.1kW class
Configuration	Series							
Wall Mounted Type	FTKM-P		FTKM 25PVM	FTKM 35PVM	FTKM 42PVM	FTKM 50PVM		
						FTKM 60PVM		
								FTKM 71PVM
Duct Concealed Type	CDKP-P		CDKP 25PVM					
				CDKM 35PVM		CDKM 50PVM	CDKM 60PVM	

R32 Inverter Multi-Split S Series

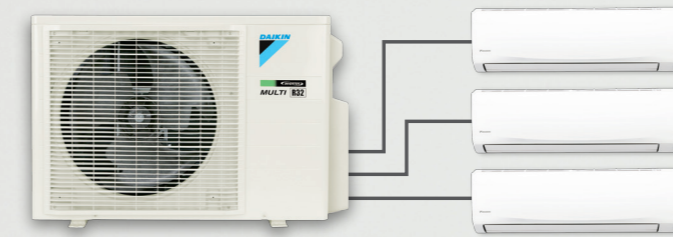

Outdoor	MKC50RVM	MKC70SVM
Rated Cooling Capacity, KW	5.0	7.0
COP, W/W	4.31	4.61
Max. Connectable Indoor Units	3	3

Indoor			2.5kW class	3.5kW class	5.0kW class
Configuration	Series				
Wall Mounted Type	CTKC Series		CTKC 25RVM	CTKC 35RVM	CTKC 50SVM


SKYAIR

R32 Inverter Single-Split

Ceiling Cassette



Panel : BYCQ-EAF

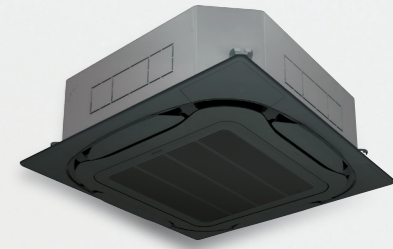

Panel : BYCQ-EAK



Panel : BYCQ-EEF

Indoor	FCF50CVM	FCF60CVM	FCF71CVM	
Outdoor	RZF50CVM	RZF60CVM	RZF71CVM	RZF71CYM
Rated Cooling Capacity (Min-Max), Btu/hr	17,100 (10,900-19,100)	20,500 (10,900-20,500)	24,200 (10,900-27,300)	
COP, W/W	4.39	3.92	3.68	
CSPF, Wh/Wh	6.60	6.31	6.31	

Indoor	FCF100CVM		FCF125CVM	
Outdoor	RZF100CVM	RZF100CYM	RZF125CVM	RZF125CYM
Rated Cooling Capacity (Min-Max), Btu/hr	34,100 (17,100-38,200)		42,700 (19,500-47,800)	
COP, W/W	3.37		2.99	
CSPF, Wh/Wh	5.50		5.15	

Indoor	FCF140CVM	
Outdoor	RZF140CVM	RZF140CYM
Rated Cooling Capacity (Min-Max), Btu/hr	47,800 (21,200-52,900)	
COP, W/W	2.56	
CSPF, Wh/Wh	5.00	

