

A large, modern restaurant interior with a high ceiling, circular tables, and ornate chairs. The ceiling features recessed lighting and decorative light fixtures. The floor is highly reflective, showing the surrounding environment. The background shows a large window and a bar area.

R410A

Non Inverter


High Static
Ducted Unit

Indoor Unit (Single Skin Ducted Type)	Outdoor Model
 <p data-bbox="549 683 735 712">FBHN80/100HBV1X</p>	 <p data-bbox="911 483 1123 512">FBVN300/350H3BY1C</p>
 <p data-bbox="542 1077 745 1106">FBHN125/150HBY1C</p>	 <p data-bbox="906 880 1118 909">FBVN400/500H4BY1C</p>  <p data-bbox="1278 880 1442 909">RHN80HMHY1X</p>
 <p data-bbox="555 1453 724 1482">FBVN200H2BY1C</p>	 <p data-bbox="927 1254 1098 1283">FBVN450H3BY1C</p>
 <p data-bbox="536 1836 751 1865">FBVN250/300H2BY1C</p>	 <p data-bbox="930 2018 1098 2047">FBVN750H5BY1X</p>  <p data-bbox="1230 1637 1490 1666">RVN100/125/150HMHY1C</p>

Indoor Unit (Double Skin Ducted Type)		Outdoor Model
 FBDHN80/100HV1X	 FBDHN300H3Y1X	 RHN80HMHY1X
		 RVN100/125/150HMHY1C
 FBDHN125/150HY1X	 FBDHN350H3Y1X	
 FBDHN200/250/300H2Y1X	 FBDHN400/500H4Y1X	

● Microchannel Heat Exchanger (MCHX)

- Microchannel Heat Exchanger (MCHX) utilizes whole aluminium coils with multiple flat microchannel tubes through which refrigerant flow.
- As air travels perpendicular to the refrigerant flow, it provides more contact surface area with microchannel tube, therefore increasing the heat transfer performance.

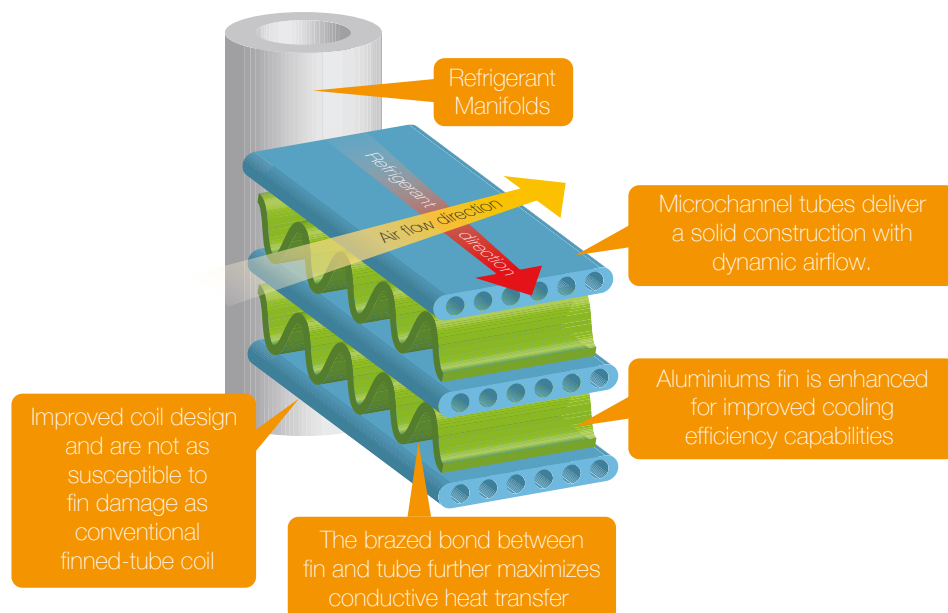

● Features of Microchannel Heat Exchanger (MCHX)

- Resistant to galvanic corrosion due to similar properties of material (aluminium) used in the construction of the heat exchanger.
- The total piping length can be extended up to 75 meters, and offers more flexibility in system design.
- Easy handling due to compact design of microchannel tube and light weight of aluminium.
- Reduce refrigerant charge thanks to its compact design of microchannel heat exchanger.
- Robust and easy to clean by using high pressurized water.

● R410A : Ozone-friendly Refrigerant

R410A refrigerant has no chlorine content which do not contribute to the depletion of ozone layer.

● Changeable Drive Package

Non-standard external static pressure and air flow requirement can be sized by changing the factory fitted drive package (for belt driven model only).



● Anti-corrosion Evaporator

R410A ducted blower H-series come standard with hydrophilic coating fin to ensure optimum system effectiveness and durability.

● Part Load Operation

The modular unit configuration allows units to operate under partial load condition to meet the required cooling capacity. When any unit is on standby for maintenance or repair, the other condensing units continue to function to cool the premise.

● High Efficiency Scroll Compressor

R410A ducted blower H-series is powered by highly energy efficient and reliable scroll type compressor, offering user the vital advantage of quiet operation and efficient cooling.

● Excellent Thermal Barrier

(applicable for double skin ducted type only)

- All the frameworks are insulated with 1 inch double skin PU insulation panel to create a thermal barrier between the internal and external surfaces.
- The Polyurethane foam (PU) create the optimum insulation performance and rigidity.

● User Friendly Wired Controller

(optional controller for single skin ducted type only)

- Wired controller is supplied together with ducted blower H-series based on project request.
- The wired controller offers wide range of control features including temperature setting, timer, self diagnosis error code display and more.



Single Condenser system
(three fan speed controller)

DSLM8



Single Condenser system
(single fan speed controller)

BRC51A64



Multi Condenser System


BRC51C61

● Air Filter (Optional)

- Washable type AAF filter is supplied as optional accessories.
- AAF filter is a lightweight filter which is easy to install, and has the high dust holding capacity to improves the quality of indoor air.

● Indoor Air Throw Direction

The choices of vertical and horizontal air throw make it versatile to various architectural design (125,000 Btu/hr and above).

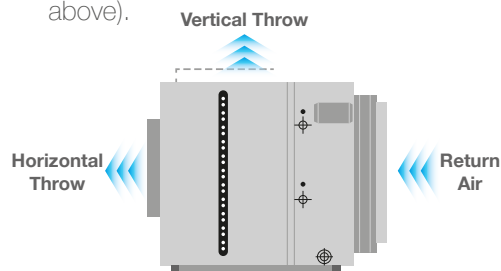

● Safety Features

- Built in internal overload protection for compressor.
- High and low pressure protection.
- Phase sequencer to detect for any wrong phase and phase loss during installation and operation.

● R410A High Static Ducted Type (Single Skin)

MODEL	INDOOR UNIT		FBHN80HBV1X	FBHN100HBV1X	FBHN125HBY1C	FBHN150HBY1C
	OUTDOOR UNIT		RHN80HMHTY1X	RVN100HMHTY1C	RVN125HMHTY1C	RVN150HMHTY1C
NOMINAL COOLING CAPACITY		Btu/hr	80,000	100,000	125,000	150,000
		W	23,447	29,308	36,635	43,962
NOMINAL TOTAL INPUT POWER		W	7,100	10,000	11,350	14,800
NOMINAL RUNNING CURRENT - 1ø[3ø]		A	[12.5]	[17.1]	[19.7]	[28.7]
EER		Btu/hr / W	11.27	10.00	11.01	10.14
POWER SOURCE		V/Ph/Hz	380-415 / 3 / 50			
REFRIGERANT TYPE/ CONTROL			R410A / INDOOR TXV + CAPTUBE			
EXTERNAL STATIC PRESSURE (W/O FILTER)		Pa (in.wg)	145 / 0.58	175 / 0.7	200 / 0.8	200 / 0.8
AIR FLOW		l/s / CFM	1,086 / 2,300	1,416 / 3,000	1,770 / 3,750	2,124 / 4,500
SOUND PRESSURE LEVEL (MEASURED IN SOUND ROOM)		dBA	52	55	53	56
UNIT DIMENSION - HxWxD	INDOOR UNIT	mm	553 x 1402 x 605		776 x 1,540 x 850	
	OUTDOOR UNIT	mm	929 x 1235 x 496	1,067 x 880 x 880	1,067 x 980 x 980	1,166 x 980 x 980
UNIT WEIGHT	INDOOR UNIT	kg	83	84	159	
	OUTDOOR UNIT		111	135	157	177
COPPER PIPE SIZE	LIQUID	mm/in	12.7 / 1/2	12.7 / 1/2	12.7 / 1/2	15.88 / 5/8
	GAS	mm/in	22.23 / 7/8	25.4 / 1.0	28.58 / 1-1/8	34.93 / 1-3/8

MODEL	INDOOR UNIT		FBVN200H2BY1C	FBVN250H2BY1C	FBVN300H2BY1C	FBVN300H3BY1C	FBVN350H3BY1C		
	OUTDOOR UNIT		RVN100HMHTY1C X 2	RVN125HMHTY1C X 2	RVN150HMHTY1C X 2	RVN100HMHTY1C X 3	RVN100HMHTY1C	RVN125HMHTY1C X 2	
NOMINAL COOLING CAPACITY			Btu/hr	200,000	250,000	300,000	300,000	350,000	
			W	58,617	73,271	87,925	87,925	102,579	
NOMINAL TOTAL INPUT POWER			W	19,700	23,880	30,520	29,710	34,550	
NOMINAL RUNNING CURRENT- 1ø [3ø]			A	[35.1]	[40.6]	[58.7]	[52.60]	[60.4]	
EER			Btu/hr / W	10.15	10.47	9.83	10.10	10.13	
POWER SOURCE			V/Ph/Hz	380-415 / 3 / 50					
REFRIGERANT TYPE/ CONTROL			R410A / INDOOR TXV + CAPTUBE						
EXTERNAL STATIC PRESSURE (W/O FILTER)			Pa (in.wg)	225 / 0.9	300 / 1.2	300 / 1.2	300 / 1.2	300/ 1.2	
AIR FLOW			l/s / CFM	2,832 / 6,000	3,540 / 7,500	4,248 / 9,000	4,248 / 9,000	4,956 / 10,500	
SOUND PRESSURE LEVEL (MEASURED IN SOUND ROOM)			dBA	61	63	66	66	66	
UNIT DIMENSION - HxWxD			INDOOR UNIT	mm	885 x 1,794 x 850	1,231 x 1,766 x 1,069		1,486 x 2,022 x 1,069	
			OUTDOOR UNIT	mm	(1,067 x 880 x 880) x 2	(1,067 x 980 x 980) x 2	(1,166 x 980 x 980) x 2	(1,067 x 880 x 880) x 3	1,067 x 880 x 880
UNIT WEIGHT			INDOOR UNIT	kg	196	323	337	337	431
			OUTDOOR UNIT		135 x 2	157 x 2	177 x 2	135 x 3	135
COPPER PIPE SIZE			LIQUID	mm/in	12.7 / 1/2	12.7 / 1/2	15.88 / 5/8	12.7 / 1/2	12.7 / 1/2
			GAS	mm/in	25.4 / 1.0	28.58 / 1-1/8	34.93 / 1-3/8	25.4/ 1.0	25.4 / 1.0

MODEL	INDOOR UNIT		FBVN400H4BY1C	FBVN450H3BY1C	FBVN500H4BY1C	FBVN600H4BY1X	FBVN750H5BY1X
	OUTDOOR UNIT		RVN100HMHTY1C X 4	RVN150HMHTY1C X 3	RVN125HMHTY1C X 4	RVN150HMHTY1C X 4	RVN150HMHTY1C X 5
NOMINAL COOLING CAPACITY		Btu/hr	400,000	450,000	500,000	600,000	750,000
		W	117,233	131,887	146,542	175,850	219,812
NOMINAL TOTAL INPUT POWER		W	39,330	45,930	49,990	61,620	78,640
NOMINAL RUNNING CURRENT- 1ø [3ø]		A	[70.2]	[89.3]	[85.6]	[118.9]	[152.1]
EER		Btu/hr / W	10.17	9.80	10.00	9.74	9.54
POWER SOURCE		V/Ph/Hz	380-415 / 3 / 50				
REFRIGERANT TYPE/ CONTROL			R410A / INDOOR TXV + CAPTUBE				
EXTERNAL STATIC PRESSURE (W/O FILTER)		Pa (in.wg)	310 / 1.24	330 / 1.32	390 / 1.56	390 / 1.56	430 / 1.72
AIR FLOW		l/s / CFM	5,664 / 12,000	6,372 / 13,500	7,080 / 15,000	8,496 / 18,000	10,620 / 22,500
SOUND PRESSURE LEVEL (MEASURED IN SOUND ROOM)		dBA	66	68	68	70	71
UNIT DIMENSION - HxWxD	INDOOR UNIT	mm	1,486 x 2,174 x 1,336			1,918 x 2,174 x 1,775	2,197 x 2,174 x 1,775
	OUTDOOR UNIT	mm	(1,067 x 880 x 880) x 4	(1,166 x 980 x 980) x 3	(1,067 x 980 x 980) x 4	(1,166 x 980 x 980) x 4	(1,166 x 980 x 980) x 5
UNIT WEIGHT	INDOOR UNIT	kg	488	533	580	899	946
	OUTDOOR UNIT		135 x 4	177 x 3	157 x 4	177 x 4	177 x 5
COPPER PIPE SIZE	LIQUID	mm/in	12.7 / 1/2	15.88 / 5/8	12.7 / 1/2	15.88 / 5/8	15.88 / 5/8
	GAS	mm/in	25.4 / 1.0	34.93 / 1-3/8	28.58 / 1-1/8	34.93 / 1-3/8	34.93 / 1-3/8

1. DUE TO PRODUCT INNOVATION, ALL SPECIFICATION ARE SUBJECTED TO CHANGE BY THE MANUFACTURER WITHOUT PRIOR NOTICE
2. ALL UNITS ARE BEING TESTED AND COMPLY TO ISO 13253
3. NOMINAL COOLING CAPACITY ARE BASED ON THE CONDITIONS BELOW :
COOLING - 26.7°C DB / 19.4°C WB INDOOR AND 35°C DB / 23.9°C WB OUTDOOR.
4. SOUND PRESSURE LEVELS ARE MEASURED IN ANECHOIC CHAMBER. DURING ACTUAL OPERATION, SOUND PRESSURE LEVEL WILL HIGHER AS A RESULT OF ROOM SPECIFICATION CONDITION.
5. THE RUNNING CURRENT MEASURED AT SITE MAY VARY FROM THE SPECIFICATIONS STATED
6. FOR DIFFERENT INDOOR/OUTDOOR AIR THROW, KINDLY REFER TO OUR NETWORK DEVELOPMENT EXECUTIVES / REPRESENTATIVES

R410A High Static Ducted Type (Double Skin)

MODEL	INDOOR UNIT		FBDHN80HV1X	FBDHN100HV1X	FBDHN125HY1X	FBDHN150HY1X
	OUTDOOR UNIT		RHN80HMHTY1X	RVN100HMHTY1C	RVN125HMHTY1C	RVN150HMHTY1C
NOMINAL COOLING CAPACITY		Btu/hr	80,000	100,000	125,000	150,000
		W	23,447	29,308	36,635	43,962
NOMINAL TOTAL INPUT POWER		W	7,100	10,000	11,315	14,753
NOMINAL RUNNING CURRENT- 1ø [3ø]		A	[12.50]	[17.10]	[19.62]	[28.6]
EER		Btu/hr / W	11.27	10.00	11.05	10.17
POWER SOURCE		V/Ph/Hz	380-415 / 3 / 50			
REFRIGERANT TYPE/ CONTROL			R410A / INDOOR TXV + CAPTUBE			
EXTERNAL STATIC PRESSURE (W/O FILTER)		Pa (in.wg)	145 / 0.58	175 / 0.70	200 / 0.80	200 / 0.80
AIR FLOW		l/s / CFM	1,086 / 2,300	1,416 / 3,000	1,770 / 3,750	2,124 / 4,500
SOUND PRESSURE LEVEL (MEASURED IN SOUND ROOM)		dBA	52	55	53	55
UNIT DIMENSION- HxWxD	INDOOR UNIT	mm	632 x 1,438 x 730		842 x 1,588 x 973	
	OUTDOOR UNIT	mm	929 x 1,235 x 496	1,067 x 880 x 880	1,067 x 980 x 980	1,166 x 980 x 980
UNIT WEIGHT	INDOOR UNIT	kg	99	99	179	179
	OUTDOOR UNIT		111	135	157	177
COPPER PIPE SIZE	LIQUID	mm/in	12.7 / 1/2	12.7 / 1/2	12.7 / 1/2	15.88 / 5/8
	GAS	mm/in	22.23 / 7/8	25.40 / 1.0	28.58 / 1-1/8	34.93 / 1-3/8

MODEL	INDOOR UNIT		FBDHN200H2Y1X	FBDHN250H2Y1X	FBDHN300H2Y1X	FBDHN300H3Y1X
	OUTDOOR UNIT		RVN100HMHTY1C X 2	RVN125HMHTY1C X 2	RVN150HMHTY1C X 2	RVN100HMHTY1C X 3
NOMINAL COOLING CAPACITY		Btu/hr	200,000	250,000	300,000	300,000
		W	58,617	73,271	87,925	87,925
NOMINAL TOTAL INPUT POWER		W	19,775	24,363	30,618	29,808
NOMINAL RUNNING CURRENT- 1ø [3ø]		A	[35.24]	[41.47]	[58.89]	[52.83]
EER	Btu/hr / W		10.11	10.26	9.80	10.06
POWER SOURCE		V/Ph/Hz	380-415 / 3 / 50			
REFRIGERANT TYPE/ CONTROL			R410A / INDOOR TXV + CAPTUBE			
EXTERNAL STATIC PRESSURE (W/O FILTER)		Pa (in.wg)	225 / 0.9	300 / 1.20	300 / 1.20	300 / 1.20
AIR FLOW		l/s / CFM	2,832 / 6,000	3,540 / 7,500	4,248 / 9,000	4,248 / 9,000
SOUND PRESSURE LEVEL		dBA	58	60	63	63
UNIT DIMENSION- HxWxD	INDOOR UNIT	mm	932 x 1,770 x 950	1,282 x 1,770 x 1,170		
	OUTDOOR UNIT	mm	(1,067 x 880 x 880) x 2	(1,067 x 980 x 980) x 2	(1,166 x 980 x 980) x 2	(1,067 x 880 x 880) x 3
UNIT WEIGHT	INDOOR UNIT	kg	218	356	342	342
	OUTDOOR UNIT		135 x 2	157 x 2	177 x 2	135 x 3
COPPER PIPE SIZE	LIQUID	mm/in	12.7 / 1/2	12.7 / 1/2	15.88 / 5/8	12.7 / 1/2
	GAS	mm/in	25.40 / 1.0	28.58 / 1-1/8	34.93 / 1-3/8	25.40 / 1.0

MODEL	INDOOR UNIT		FBDHN350H3Y1X		FBDHN400H4Y1X	FBDHN500H4Y1X
	OUTDOOR UNIT		RVN100HMHTY1C	RVN125HMHTY1C X 2	RVN100HMHTY1C X 4	RVN125HMHTY1C X 4
NOMINAL COOLING CAPACITY		Btu/hr	350,000		400,000	500,000
		W	102,579		117,233	146,542
NOMINAL TOTAL INPUT POWER		W	34,630		39,401	50,069
NOMINAL RUNNING CURRENT- 1ø [3ø]		A	[60.57]		[70.36]	[85.74]
EER	Btu/hr / W		10.11		10.15	9.99
POWER SOURCE		V/Ph/Hz	380-415 / 3 / 50			
REFRIGERANT TYPE/ CONTROL		R410A / INDOOR TXV + CAPTUBE				
EXTERNAL STATIC PRESSURE (W/O FILTER)		Pa (in.wg)	300 / 1.2		310 / 1.24	390 / 1.56
AIR FLOW		l/s / CFM	4,955 / 10,500		5,710/12,000	7,135/15,000
SOUND PRESSURE LEVEL		dBA	63		64	65
UNIT DIMENSION- HxWxD	INDOOR UNIT	mm	1,540 x 2,020 x 1,170		1,540 x 2,170 x 1,370	1,540 x 2,170 x 1,370
	OUTDOOR UNIT	mm	1,067 x 880 x 880	(1,067 x 980 x 980) x 2	(1,067 x 880 x 880) x 4	(1,067 x 980 x 980) x 4
UNIT WEIGHT	INDOOR UNIT	kg	462		523	614
	OUTDOOR UNIT		135	157 x 2	135 x 4	157 x 4
COPPER PIPE SIZE	LIQUID	mm/in	12.7 / 1/2		12.7 / 1/2	12.7 / 1/2
	GAS	mm/in	25.40 / 1.0	28.58 / 1-1/8	25.40 / 1.0	28.58 / 1-1/8

- 1) DUE TO PRODUCT INNOVATION, ALL SPECIFICATIONS ARE SUBJECTED TO CHANGE BY THE MANUFACTURER WITHOUT PRIOR NOTICE.
2) ALL UNITS ARE BEING TESTED AND COMPLY TO ISO 13253
3) NOMINAL COOLING CAPACITY ARE BASED ON THE CONDITIONS BELOW :
COOLING - 26.7 °C DB/ 19.4 °C WB INDOOR AND 35°C DB/ 23.9 °C WB OUTDOOR
4) SOUND PRESSURE LEVELS ARE MEASURED IN ANECHOIC CHAMBER. DURING ACTUAL OPERATION, SOUND PRESSURE LEVEL WILL HIGHER AS A RESULT OF ROOM SPECIFICATION CONDITION.
5) THE RUNNING CURRENT MEASURED AT SITE MAY VARY FROM THE SPECIFICATIONS STATED
6) FOR DIFFERENT INDOOR/OUTDOOR AIR THROW, KINDLY REFER TO OUR NETWORK DEVELOPMENT EXECUTIVES/ REPRESENTATIVES.

www.daikin.com.my

DAIKIN MALAYSIA SALES & SERVICE SDN. BHD.

(109719-M)

Head Office: Tel: 03-7953 8388 Fax: 03-7956 4371

Email: sales_enquiry@daikin.com.my, customer_service@daikin.com.my

Branches:

• Kedah	Tel: 04-730 5670	• Johor	Tel: 07-557 7788
• Penang	Tel: 04-331 1670	• Pahang	Tel: 09-567 6778
• Perak	Tel: 05-548 2307	• Kelantan	Tel: 09-747 4578
• Negeri Sembilan	Tel: 06-768 8969	• Sabah	Tel: 088-722 194
• Melaka	Tel: 06-288 1133	• Sarawak	Tel: 082-333 299

Authorized dealer: