

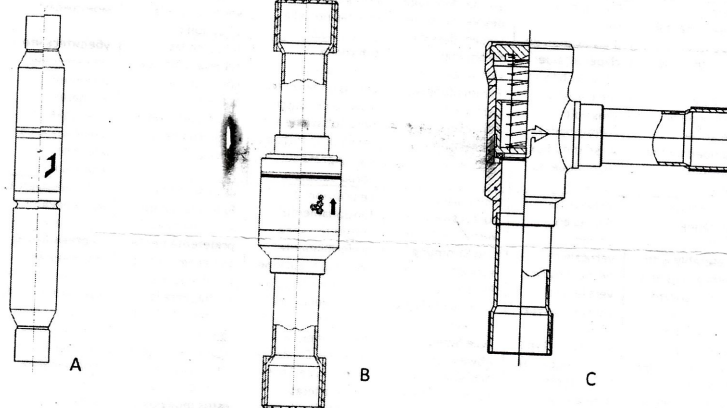
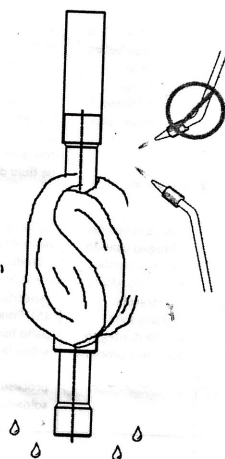
**CHECK VALVE series YCV**

Applicable to fluids and refrigerants of GROUP 2 according to Directive 97/23/CE (29 May 1997) or GROUP A1 according to ANSI-ASHRAE 34-2010.

**ERC**

Temperature allowed range: -50°C to +140°C (-58°F to +284°F)

Design Pressure (PS): 46 bar (667 psi)

**1****2**

Max. 120°C/248°F

Copyright ©SANHUA 2016  
Subject to change without notice

1

II-YCV-MU-R1603