

DAIKIN

DP-0619-A

Dewpoint®



Drainage Pump
Premium Series

Features

Stylist Design

**High Efficiency
And Silent
Operation**

**Simple
Installation &
User Friendly**

**Wide Range
Of Drainage
Pump Choices**

**Easy
Maintenance**

**Warranty
Coverage**


**Fast And
Reliable Service
Support**

**International
Standard
Certification**

Premium Version

Built In Duckbill Concept

- A Duckbill Design To Prevent Water Backflow And Water Storage Tank Overflow.

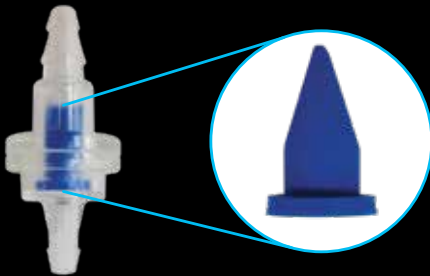

Trendy Outlook

- Smart Outlook To Meet Current Market Requirement.
- Pure White Design To Embedded In Modern Interior Design, Increase Aesthetic Value Of Your Environment.



Easy Installation And Servicing Friendly

- Option To Install Direct To Mounting Bracket, Minimum Gap And Close Up To Air Conditioner.
- An Easy Dismantling Cover For Servicing And Dirt Cleaning Purposes.

Why Choose Electrical Pump Photo Electronic Sensor

- Photo Sensor With Longer Cycle Time And More Accurate Sensibility.



LED Display

- **ON** - Green Light Represent Pump Is Running
- **NG** - Red Light Represent Overflow Indication
- LED Light To Display Drainage Pump Current Working Status



Intelligence

Electrical Drainage Pump




Specifications

Series		INTELLIGENCE
Model		DDP1030CE
Control Type		Electrical
Power Source	V/Ph/Hz	240/1/50
Power	W	18
Dimension (L x W x H)	mm	200 x 114 x 142
Weight	kg	1.6
Maximum Flow Rate	litre/min	1.8
Maximum Allowable Pump Lift	m	2.5
Applicable Cooling Capacity	hp	3
Sound Pressure Level	dB	43
Tank Volume	ml	580
Complimentary Hose	m	5
Draining Tube	Inner diameter, mm	4.0
	Outer diameter, mm	6.0

Note: Due to our policy of innovation, all product specifications are subject to change without prior notice.

Pump Lift vs Flow Rate

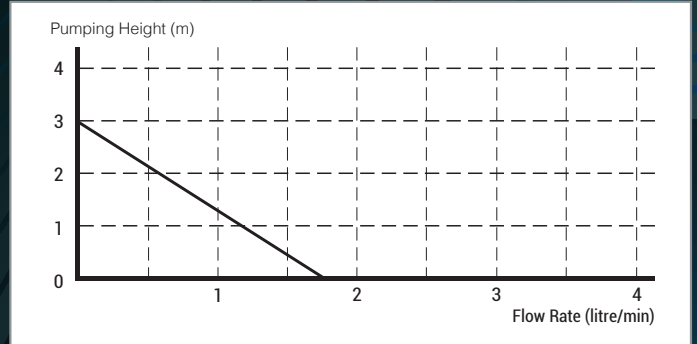

Performance

Mechanical Drainage Pump





Specifications

Series		PERFORMANCE
Model		DDP1030CM
Control Type		Mechanical
Power Source	V/Ph/Hz	240/1/50
Power	W	18
Dimension (L x W x H)	mm	200 x 114 x 142
Weight	kg	1.6
Maximum Flow Rate	litre/min	1.8
Maximum Allowable Pump Lift	m	2.5
Applicable Cooling Capacity	Up to (hp)	3
Sound Pressure Level	dB	43
Tank Volume	ml	580
Complimentary Hose	m	5
Draining Tube	Inner diameter, mm	4.0
	Outer diameter, mm	6.0

Note: Due to our policy of innovation, all product specifications are subject to change without prior notice.

Pump Lift vs Flow Rate

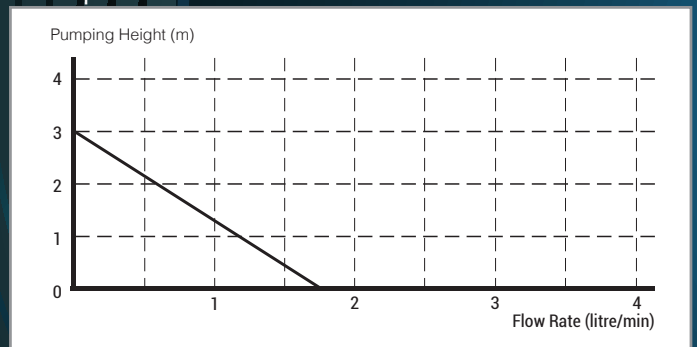

Fluenz III


Mechanical Drainage Pump

Specifications

Series		FLUENZ III
Model		DDP1060CM
Control Type		Mechanical
Power Source	V/Ph/Hz	240/1/50
Power	W	27
Dimension (L x W x H)	mm	175 x 108 x 150
Weight	kg	1.7
Maximum Flow Rate	litre/min	3.5
Maximum Allowable Pump Lift	m	2.5
Applicable Cooling Capacity	Up to (hp)	6
Sound Pressure Level	dB	34
Tank Volume	ml	420
Complimentary Hose	m	5
Draining Tube	Inner diameter, mm	4.0
	Outer diameter, mm	6.0

Note: Due to our policy of innovation, all product specifications are subject to change without prior notice.

Pump Lift vs Flow Rate

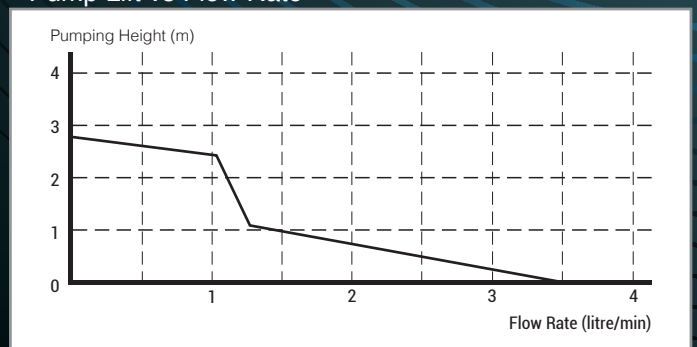



Versatile

Mechanical Drainage Pump




Specifications

Series		VERSATILE
Model		DDP0100CM
Control Type		Mechanical
Power Source	V/Ph/Hz	240/1/50
Power	W	57
Dimension (L x W x H)	mm	250 x 110 x 140
Weight	kg	1.8
Maximum Flow Rate	litre/min	3.1
Maximum Allowable Pump Lift	m	4.5
Applicable Cooling Capacity	Up to (hp)	10
Sound Pressure Level	dB	50
Tank Volume	ml	1100
Complimentary Hose	m	5
Draining Tube	Inner diameter, mm	4.0
	Outer diameter, mm	6.0

Note: Due to our policy of innovation, all product specifications are subject to change without prior notice.

Pump Lift vs Flow Rate

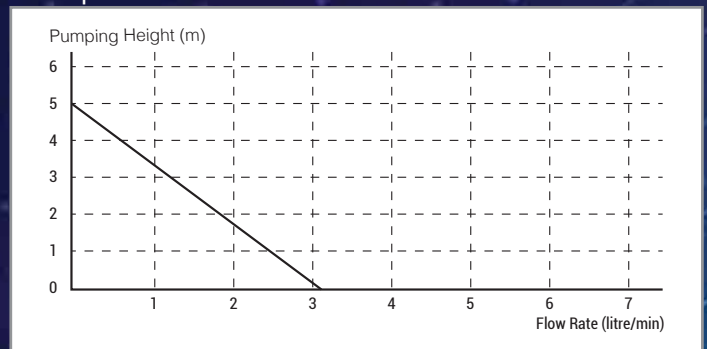

Powerful

Mechanical Drainage Pump




Specifications

Series		POWERFUL
Model		DDP0150CM
Control Type		Mechanical
Power Source	V/Ph/Hz	240/1/50
Power	W	68
Dimension (L x W x H)	mm	290 x 128 x 168
Weight	kg	2.2
Maximum Flow Rate	litre/min	7.0
Maximum Allowable Pump Lift	m	5.0
Applicable Cooling Capacity	Up to (hp)	15
Sound Pressure Level	dB	50
Tank Volume	ml	1750
Complimentary Hose	m	10
Draining Tube	Inner diameter, mm	9.5
	Outer diameter, mm	11.5

Note: Due to our policy of innovation, all product specifications are subject to change without prior notice.

Pump Lift vs Flow Rate

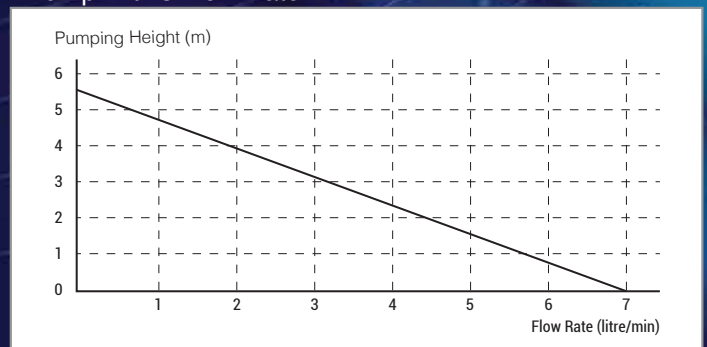

www.daikin.com.my

DAIKIN MALAYSIA SALES & SERVICE SDN. BHD.

(109719-M)

Call Centre: 1300-88-DAIKIN(324546)

Email: sales_enquiry@daikin.com.my, customer_service@daikin.com.my

Branches:

- Kedah Tel: 04-730 5670
- Penang Tel: 04-331 1670
- Perak Tel: 05-548 2307
- Negeri Sembilan Tel: 06-768 8969
- Melaka Tel: 06-288 1133
- Johor Tel: 07-557 7788
- Pahang Tel: 09-567 6778
- Kelantan Tel: 09-747 4578
- Sabah Tel: 088-722 194
- Sarawak Tel: 082-333 299

Authorized dealer:

Dewpoint and are marketed by: **DAIKIN MALAYSIA SALES & SERVICE SDN. BHD.**

Catalogue No: DP-0619-A