


DEWPOINT

Installation Dimension

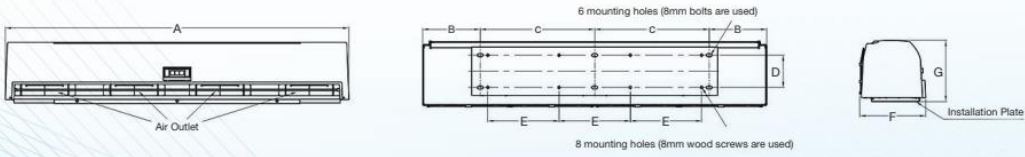


Model	A	B	C	D	E	F	G
DAC308C DAC310C DAC312C	900	50	400	113	249	230	214
DAC408C DAC410C DAC412C	1200	200	400	113	249	230	214

Model		DAC308C		DAC408C		DAC310C		DAC410C		DAC312C		DAC412C	
Width	ft	3		4		3		4		3		4	
Throw	ft	8		8		10		10		12		12	
Power Supply	V/PH/Hz	240/1/50											
Speed Control		Hi	Lo	Hi	Lo	Hi	Lo	Hi	Lo	Hi	Lo	Hi	Lo
Max Power Input	W	89	76	106	91	200	175	250	210	276	250	320	300
Current	A	0.38	0.32	0.45	0.38	0.81	0.72	0.94	0.87	1.14	1.09	1.31	1.24
Outlet Velocity	m/s	9.6	8.5	9.3	8.4	14.4	11.9	14.5	12.5	17.8	15.9	16.3	14.5
	ft/s	31.4	28.0	30.6	27.4	47.3	38.9	47.6	40.9	58.4	52.1	53.5	47.4
Air Volume	cfm	442	379	585	504	599	492	802	690	698	625	970	792
	L/s	209	179	276	238	282	232	379	325	329	295	458	374
Noise Level	dBA	45	42	45	42	56	53	58	55	57	54	58	55
Weight	kg	10.1		13.3		10.1		13.3		12.2		14.1	

1) DUE TO OUR POLICY OF INNOVATION, ALL SPECIFICATIONS ARE SUBJECTED TO CHANGE BY THE MANUFACTURER WITHOUT PRIOR NOTICE.

ACSON

Installation Dimensions

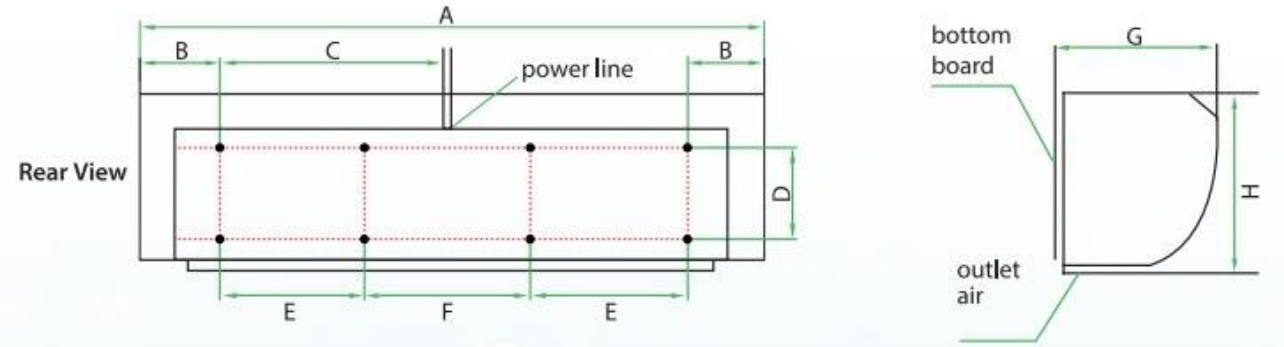

Model	Units Dimension (mm)							
	A	B	C	D	E	F	G	H
ACA 308D/310D/312D	900	105	345	120	230	230	212	230
ACA 408D/410D/412D	1200	105	495	120	330	330	212	230



D Standard Series

Model		ACA 308D		ACA 408D		ACA 310D		ACA 410D		ACA 312D		ACA 412D	
		HI	LOW	HI	LOW	HI	LOW	HI	LOW	HI	LOW	HI	LOW
Rated Voltage	V	220 - 240		220 - 240		220 - 240		220 - 240		220 - 240		220 - 240	
Rated Frequency	Hz	50		50		50		50		50		50	
Current	A	0.59	0.47	0.73	0.57	0.81	0.59	1.08	0.79	0.92	0.72	1.2	0.92
Input Power	W	130	104	160	127	195	142	260	189	218	171	285	222
Air Flow	CFM	580	482	754	620	635	510	810	700	698	600	1010	820
Air Speed	m/s	12.2	10.8	11.8	10.4	14.8	12.5	14.8	12.5	16.7	14.5	16.5	15.6
Sound Level	dB(A)	48	51	48	51	54	57	56	59	57	60	57	60
Unit Size (H x W x D)	mm	230 x 900 x 212		230 x 1200 x 212		230 x 900 x 212		230 x 1200 x 212		230 x 900 x 212		230 x 1200 x 212	
Net Weight	kg	17.0		21.0		17.0		21.0		17.0		21.0	