

# BRING SIMPLE AUTOMATION TO ENERGY SAVINGS



by Honeywell

---

24H Time Switch With Reserves

---





# MK BY HONEYWELL TIME SWITCH

## SLEEK & COMPACT

The perfect combination of form and function. Experience the beauty of simplicity with our sleek and compact timer.

## ACCURATE & RELIABLE

Compliant to EN 60730-2-7, analogue timer are designed with high precision & exactness of time.




List No: T5808

## TECHNICAL SPECIFICATIONS

SETTINGS	
Shortest switching time (Min)	10
Type of contact	Changeover contact
Switching cycle	10.000 cycles
Type of programming	Analog day dial
Programming cycle	24H
Number of program steps	144
ELECTRICAL	
Supply voltage rating	220 - 230V ~ 50Hz/60Hz
Switching capacity - Resistive load	16A/230V~ at $\cos\Phi=1$
Switching capacity - Inductive load	3A/ 230V~ ar $\cos\Phi=0.6$
Incandescent and Halogen Lamps (230V)	1000W
Power consumed	1.0 VA
Conductor cross-section	1 x 6 mm <sup>2</sup> (flexible or rigid)
Type of connection	with screw
Type of contacts	1 changeover
Battery type	NiMH rechargeable battery
Supply power reserve	72 hours
Battery charge time	120 Hours
SAFETY & STANDARD	
Reference Standard Specification	EN 60730-1 & IEC 60730-2-7
ENVIRONMENTAL	
Operating temperature	-10°C to +45°C
Storage temperature	-20°C to +55°C
IP rating	IP30

## DIMENSIONS

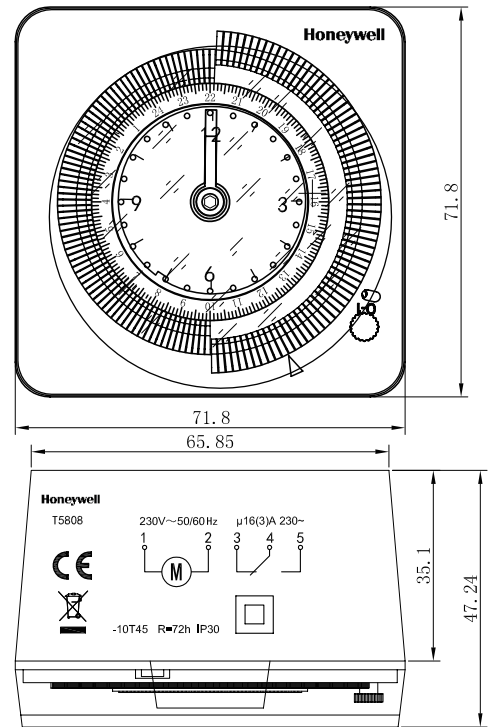

## Malaysia (ASEAN Headquarters)

Honeywell International Sdn. Bhd. Level 25,  
 UOA Corp Tower B, Avenue 10 The Vertical,  
 Bangsar South City, 59200, Kuala Lumpur,  
 Malaysia

For further inquiries please email:  
 Buildings.ASEAN@Honeywell.com



by Honeywell