


Wall-Mounted Premium



Features

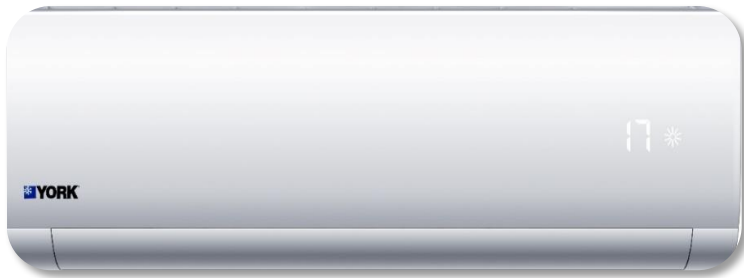

Energy Saving

Save more with the advance compressor and coil technology.



Rapid Cooling

Achieve faster cooling with our true 5-speed fan design.



Hydro Purifier

Moisturizing and refreshing the air you breathe with hydro purifier.



Quiet Mode

Experience peace and comfort at home with the use of the quiet mode.



Air Surround

Feel the breeze with our 3D airflow technology that ensures even air circulation in your home.



Elegant Design

Aesthetically designed with hidden temperature display on a classy high gloss surface.



Other Features



Comfortable Sleep



Auto Mode



24 Hour Timer



Intelligent Air



Auto Swing



Exquisite Filter



3 Minutes Protection




Auto Restart



Self - Diagnosis

Specifications

Indoor Unit

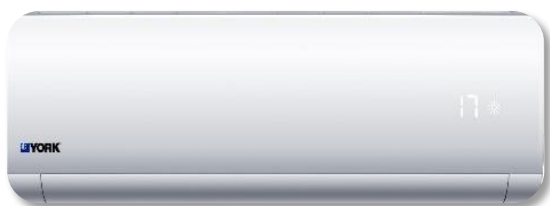

Outdoor Unit



Wireless Remote Controller



Wired Remote Controller (Optional)



Indoor Unit		Wireless	YWM5F10AAS-W	YWM5F15AAS-W	YWM5F20AAS-W
		Wired	YWM5F10AAS-SLM	YWM5F15AAS-SLM	YWM5F20AAS-SLM
Outdoor Unit			YSL5F10AAS	YSL5F15AAS	YSL5F20AAS
Cooling Capacity		Btu/hr	10,200	13,400	19,100
Input Power		W	830	1,099	1,590
Rated Current		A	3.61	4.78	6.91
EER		Btu/hr/W	12.29	12.19	12.01
Power Source		Ph/V/Hz	1Ph/220-240V/50Hz		
Refrigerant Type/ Control			R410A / OUTDOOR CAP.TUBE		
Indoor Air flow (H/L)		CFM	325/200	445/265	650/370
Noise Level (H/L)		dB(A)	39/27	45/29	46/29
Dimension (WxHxD)	Indoor	mm	815x280x205	855x280x204	1,115x336x248
	Outdoor	mm	780x540x245	780x640x245	810x688x288
Unit Weight	Indoor	kg	10.50	11.50	16.00
	Outdoor	kg	29.50	33.00	51.50
Refrigerant Piping	Liquid	mm/in	6.35 / 1/4	6.35 / 1/4	6.35 / 1/4
	Gas	mm/in	9.52 / 3/8	12.70 / 1/2	12.70 / 1/2

Indoor Unit		Wireless	YWM5F22AAS-W	YWM5F25AAS-W	YWM5F30AAS-W
		Wired	YWM5F22AAS-SLM	YWM5F25AAS-SLM	YWM5F30AAS-SLM
Outdoor Unit			YSL5F22AAS	YSL5F25AAS	YSL5F30AAS
Cooling Capacity		Btu/hr	20,300	24,200	28,000
Input Power		W	1,660	2,150	2,855
Rated Current		A	7.22	9.35	12.41
EER		Btu/hr/W	12.23	11.26	9.81
Power Source		Ph/V/Hz	1Ph/220-240V/50Hz		
Refrigerant Type/ Control			R410A / OUTDOOR CAP.TUBE		
Indoor Air flow (H/L)		CFM	650/370	710/465	710/465
Noise Level (H/L)		dB(A)	46/29	51/40	51/37
Dimension (WxHxD)	Indoor	mm	1,115x336x248	1,115x336x248	1,115x336x248
	Outdoor	mm	810x688x288	948x840x340	860x730x308
Unit Weight	Indoor	kg	16.00	16.30	17.00
	Outdoor	kg	51.50	68.00	53.00
Refrigerant Piping	Liquid	mm/in	6.35 / 1/4	9.52 / 3/8	9.52 / 3/8
	Gas	mm/in	12.70 / 1/2	15.88 / 5/8	15.88 / 5/8

Note:
 1. All designs and specifications are subjected to change without prior notice for product improvement
 2. Nominal cooling capacity is based on the conditions below
 Power supply, 1Ph/230V/50Hz
 Cooling - Indoor: 27 °C DB /19 °C WB and Outdoor 35 °C DB / 24 °C WB
 3. Units are tested and comply with the latest ISO5151

Head Office:

YORK (MALAYSIA) SALES & SERVICE SDN BHD (168496-T)

Bangunan THK, Suite 2.1, 2nd Floor,
 No.2A, Jalan 243, Section 51A,
 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia
 Tel. 03-7628 4100 Fax: 03-7628 4101

Branches:

Penang Branch
 Tel. 04-397 0213 Fax: 04-397 2045

Johor Bahru Branch
 Tel. 07-354 9878 Fax: 07-354 9871

Kota Kinabalu Branch
 Tel. 088-448 350 Fax: 088-448 352

Melaka Branch
 Tel. 06-283 3188 Fax: 06 -283 3188

Kuching Branch
 Tel. 082-553 100 Fax: 082-553 200



Authorized Dealer

Customer Care Centre: 1800 - 88 - YORK (9675)

Website: www.york.com/my