


DESIGN



KEY FEATURES

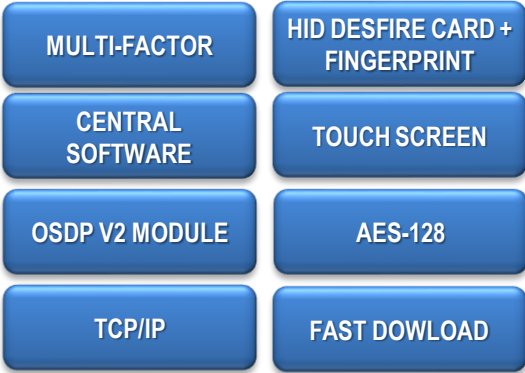

SPECIFICATIONS

MODEL	SASEFP01 SASEFP02
MULTI FACTOR	HID DESFIRE PRINT PASSWORD
FINGERPRINT CARD CAPACITY	5000 5000
COMMUNICATION	TCP/IP TO ALL TERMINALS
INDUSTRIAL STANDARD	FACTORY UNIVERSITY COMMERCIAL
BOMBA STANDARD	INTEGRATED WITH SASE & BOMBA PANEL
ALARM STANDARD	INTEGRATED WITH SASE & BURGAR ALARM PANEL
CPU	HIGH SPEED MULTICORE CPU
EVENTS	80K
MEMORY	128MB RAM / 256 FLASH
HARDWARE DISPLAY	2.8 INCHES TOUCH SCREEN
ETHERNET	RJ45 @ 100Mbps
SECURED CHANNEL	OPEN SUPERVISED DEVICE PROTOCOL (OSDP V2)
READER SITE	OSDP V2 PROTOCOL [OPTIONAL]
CENTRAL SOFTWARE	FINGERPRINT SOFTWARE – UPLOAD DOWNLOAD
SECURITY	AES-128 CBC AUTHENTICATION
HUMIDITY	10%-90% RH
WORKING TEMP	-10°C ~ 50°C
VOLTAGE	REAL TIME MONITORED
TEMPERATURE	REAL TIME MONITORED
CONTROLLER TIME	REAL TIME CALIBRATED
OSDP V2 MODULE	MADE & PAIRING IN USA [OPTIONAL ADD ON]