



## DESIGN

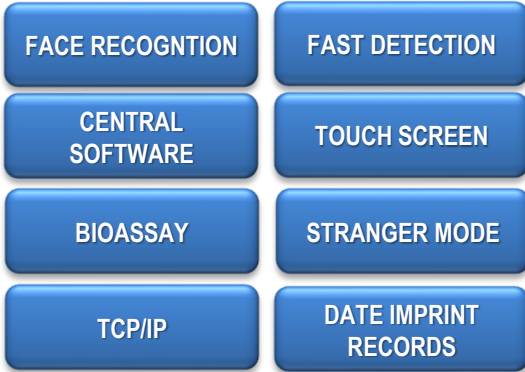

## KEY FEATURES

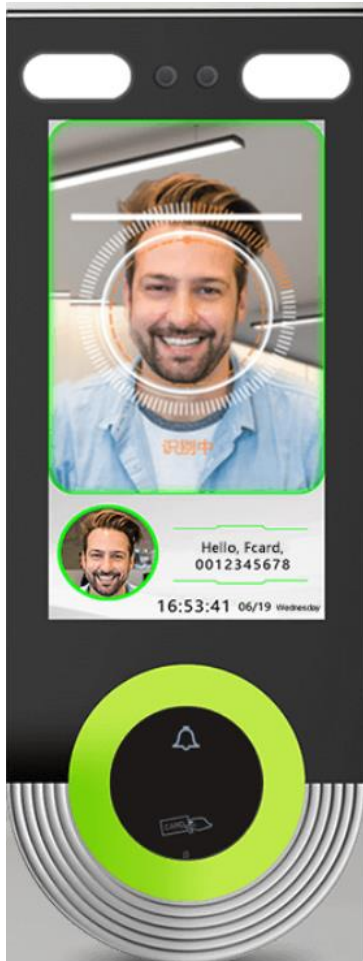

## SPECIFICATIONS

MODEL	SASEFR01
MULTI FACTOR	FACE   CARD   PASSWORD
FACE   CARD CAPACITY	20000   20000
COMMUNICATION	TCP/IP TO ALL TERMINALS
INDUSTRIAL STANDARD	FACTORY   UNIVERSITY   COMMERCIAL
BOMBA STANDARD	INTEGRATED WITH SASE & BOMBA PANEL
ALARM STANDARD	INTEGRATED WITH SASE & BURGAR ALARM PANEL
CPU	HIGH SPEED MULTICORE CPU – 4Core A7
EVENTS	200K
MEMORY	1G DDR3 RAM – 8GB EMMC
HARDWARE DISPLAY	5.5 INCHES TOUCH SCREEN
ETHERNET	RJ45 @ 100Mbps
FACE MASK DETECTION	ON / OFF
BIOASSAY	DISABLE   INFRARED   INFRARED + RGB
DISTANCE	SHORT   MEDIUM   FAR
SECURED CHANNEL	OPEN SUPERVISED DEVICE PROTOCOL (OSDP V2)
READER SITE	OSDP V2 PROTOCOL [ OPTIONAL ]
CENTRAL SOFTWARE	SASE SOFTWARE – UPLOAD DOWNLOAD
SECURITY	AES-128   CBC AUTHENTICATION [ OPTIONAL ]
HUMIDITY	10%-90% RH
WORKING TEMP	-10°C ~ 50°C
VOLTAGE	REAL TIME MONITORED
TEMPERATURE	REAL TIME MONITORED
CONTROLLER TIME	REAL TIME CALIBRATED
OSDP V2 MODULE	MADE & PAIRING IN USA [ OPTIONAL ADD ON ]