



WHERE SECURITY &
TECHNOLOGY MEET


Mini IR DOME IP CAMERA



FEATURES

- 1.3MP, 1/3" CMOS sensor
- 4mm HD fixed focus lens, ICR dual filter switch
- 15 meters effective IR distance
- Support WDR, backlight compensation, HLC, 3D noise reduction and image flip
- Support PoE

CAD DIMENSION

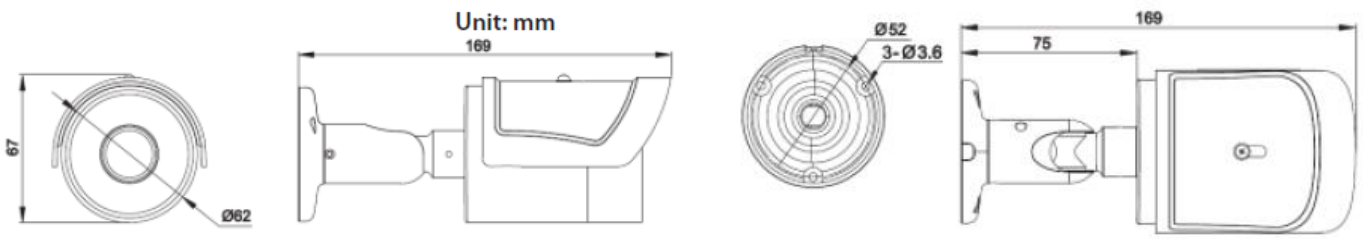



SPECIFICATION

MODEL	IPS-BT132D-P
Resolution	1280x 1024 / 25 fps
Sensor	1/3" inch CMOS
Min. Illumination	0.05Lux @ F1.2 (Color) (0 Lux IR LED On)
CAMERA	
Day / Night	True Day / Night with ICR Filter
Lens	4mm Fixed Mega Pixel IR Coated
IR LED	15 IR LEDS
IR Distance	15 Meters
WDR	100db
HLC	Support
ROI	Up to 4 regions
Electronic Shutter	1/25S ~ 1/10000S
ENCODE MODE	
Compression	H.264 / MJPEG
Audio Compression	G.711 / G.726 / ADPCM / ACC
Encode type	BaseLine Profile / Main Profile
Video Compression code rate	64K ~ 8Mbps
NETWORK	
Network Port	10/100MEthernet Interface RJ45
Protocol	Onvif2.3, GB/T28181
IE browser	Web server
Mobile	Support IOS/ Android / Windows Mobile
P2P	Support
Client	≤ 8
Web Language	English, Chinese, Russian, Polish
Recording Simultaneous	Local Micro SD Memory, Remote FTP server, TCP/UDP CMS, RTSP connection (Stream 1,2 or 3)
Network Protocols	TCP/UDP/HTTP/MULTICAST/UPnP/DHCP/PPPoE/DDNS/NFS/FTP/NTP/RTP/RTSP/IPV6/SNMP/SMTP/802.1X/QoS/HTTPS (customized)
GENERAL	
Ingress Protection	IP66
Power Supply	DC 12± 10%/1A
Power Consumption	6W Max (DC 12V)
Operating Environment	-35°C to 60°C) ; 0 ~ 95% RHG
Product Dimensions	169mm x 67mm x 70mm
Product Weight	400g