


# Kocom intercom division

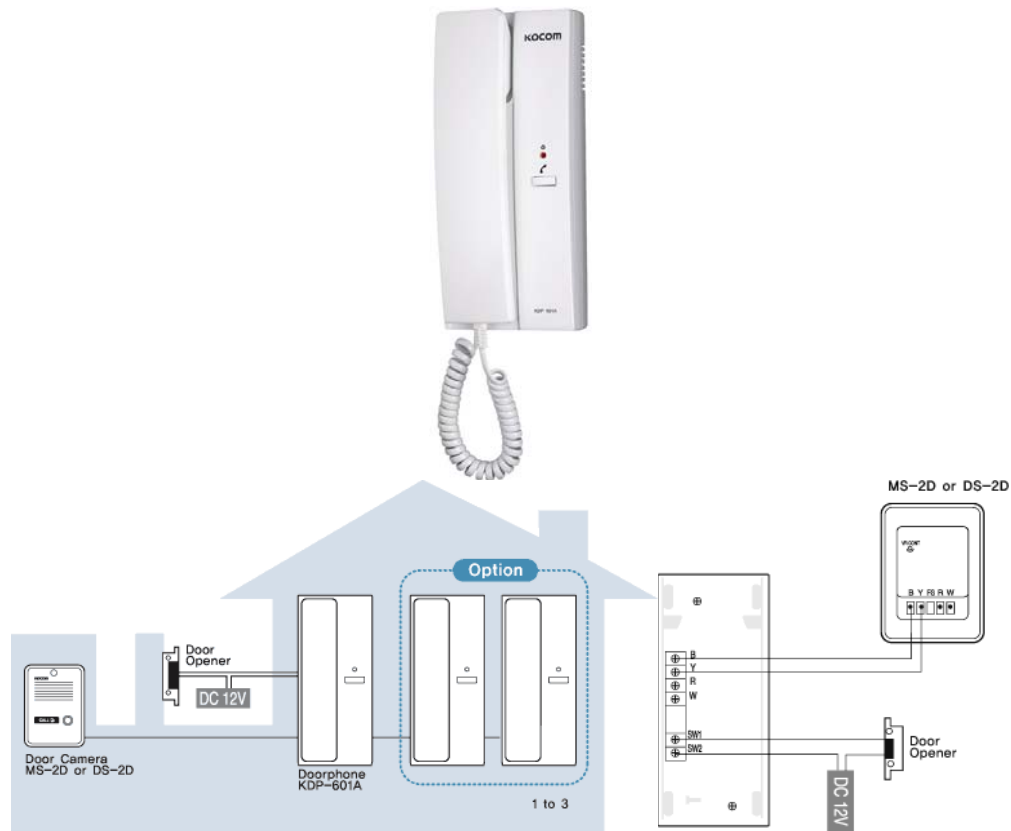

## **KDP-601A/601D (battery operated intercom)**

Gentle electronic sound

KDP-601A: AC220 (only) or 110V (only)

KDP-601D: Used DC6V (4Piece of 1.5V batteries into housing, lasts 10months)

Communication range: Ø 0.65mm wire, 300mm line

Easily mounted on wall, desk

Item	Specification
KDP-601A(AC)	
Power	AC 220V(only) or 110V(only)
Power consumption	Un load :0.5W Inload:3.3W
Signal Sound	Chime
Wiring	2 Wired polarity
Range	300m(Ø0.65mm)
KDP-601D(DC)	
Power	DC 6V(LR6-AA 1.5V X 4)
Power consumption	Un load : 0.5W, inload: 0.6W
Signal Sound	chime
Wiring	2 Wired polarity
Range	300m(Ø0.65mm)

**Marketed and distributed by :**  
**Telefeeling Communication Sdn Bhd**  
**Tel : 03-9131 3030 Fax : 03-9133 2030**  
**Email : [Info@telefeeling.com](mailto:Info@telefeeling.com)**  
**[www.telefeeling.com](http://www.telefeeling.com)**