



Cooling King

Wall Mounted
311



R22

FT311-1114-A

Features

Highly Advance Features

Auto Fault Detection

Automatically cut off whenever refrigerant leakage or insufficient refrigerant in the system.

Prolong Compressor Life Span

The unit will be shut down when the coil freeze up hence protecting and prolong the life span of the compressor.

Self-Diagnosis System


The advanced Daikin Cooling King is an intelligent unit equipped with a self-diagnosis system that can detect and indicate malfunctions with LED lights blinking.

Washable Front Panel

The front panel can be detached easily for cleaning.

Auto Random Restart

In the event of a sudden power failure during operation, units can be automatically restarted (subject to certain protection conditions) from last setting condition. This eliminates the need to restart manually after each power failure.

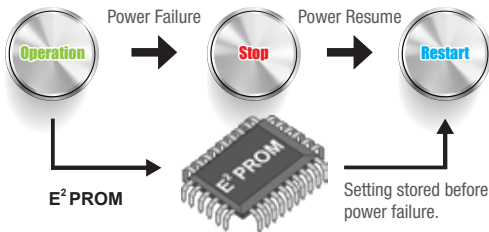

Service Excellence

The Trusted Name In Air-Conditioning

With a nation-wide service network ever ready to serve your cooling needs, Daikin will take you to a new dimension in cooling comfort.

Compact and Easy-To Use Controller

- Prominent temperature display.
- Real-time clock display.
- Easily accessible buttons



DGS01 Wireless Controller

Slim Wired Controller (Optional)

The unit also offers an optional wired controller upon your special requirement.

- Dedicated buttons for Quiet and Turbo functions
- Key lock function
- Real-time timer (7 days option, 2 events daily)



DSLM8 Wired Controller

Specification



R31CV1

Model	Indoor Unit	Wireless	FT311V1L
		Wired	FT311V1M
Outdoor Unit			R31CV1
Total Cooling Capacity	Btu/hr		28,000
	kW		8.21
Total Power	W		3150
Total Current	A		13.1
EER	Btu/hr/W		8.89
Power Source	V/Ph/Hz		220-240/1/50
Air Flow (H/M/L)	CFM		670/630/500
Sound Pressure Level	Indoor Unit (Hi/Lo)	dBa	49/45
	Outdoor Unit	dBa	56
Dimension (HXWXD)	Indoor Unit	mm	360 x 1200 x 200
	Outdoor Unit	mm	756 x 855 x 328
Unit Weight	Indoor Unit	kg	17
	Outdoor Unit	kg	57
Refrigerant	Type		R22
Copper Pipe Size	Liquid	mm/in	9.52 / 3/8
	Gas	mm/in	15.88 / 5/8

1) DUE TO OUR POLICY OF INNOVATION, ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

2) ALL UNITS ARE BEING TESTED AND COMPLY TO AHRI 210/240.

3) NOMINAL COOLING CAPACITY ARE BASED ON THE CONDITIONS BELOW:
COOLING - 27°C DB / 19°C WB INDOOR AND 35°C DB / 24°C WB OUTDOOR

4) SOUND PRESSURE LEVELS ARE MEASURED IN OYLM R&D SOUND ROOM.

GA GROUP ASSOCIATED (C&L) SDN BHD (109719-M)

Branches:

- Penang Tel: 04-331 1670
- Pahang Tel: 09-567 6778
- Melaka Tel: 06-288 1133
- Sarawak Tel: 082-333 299
- Kedah Tel: 04-733 0235
- Johor Tel: 07-557 7788
- Perak Tel: 05-548 2307
- Sabah Tel: 088-722 194
- Negeri Sembilan Tel: 06-768 8969
- Kelantan Tel: 09-747 4678

Authorized dealer: