


CR-3200UV PLUS

High Speed UV Roll to Roll Printer


Multilayer printing
to build layered



Grando UV Ink

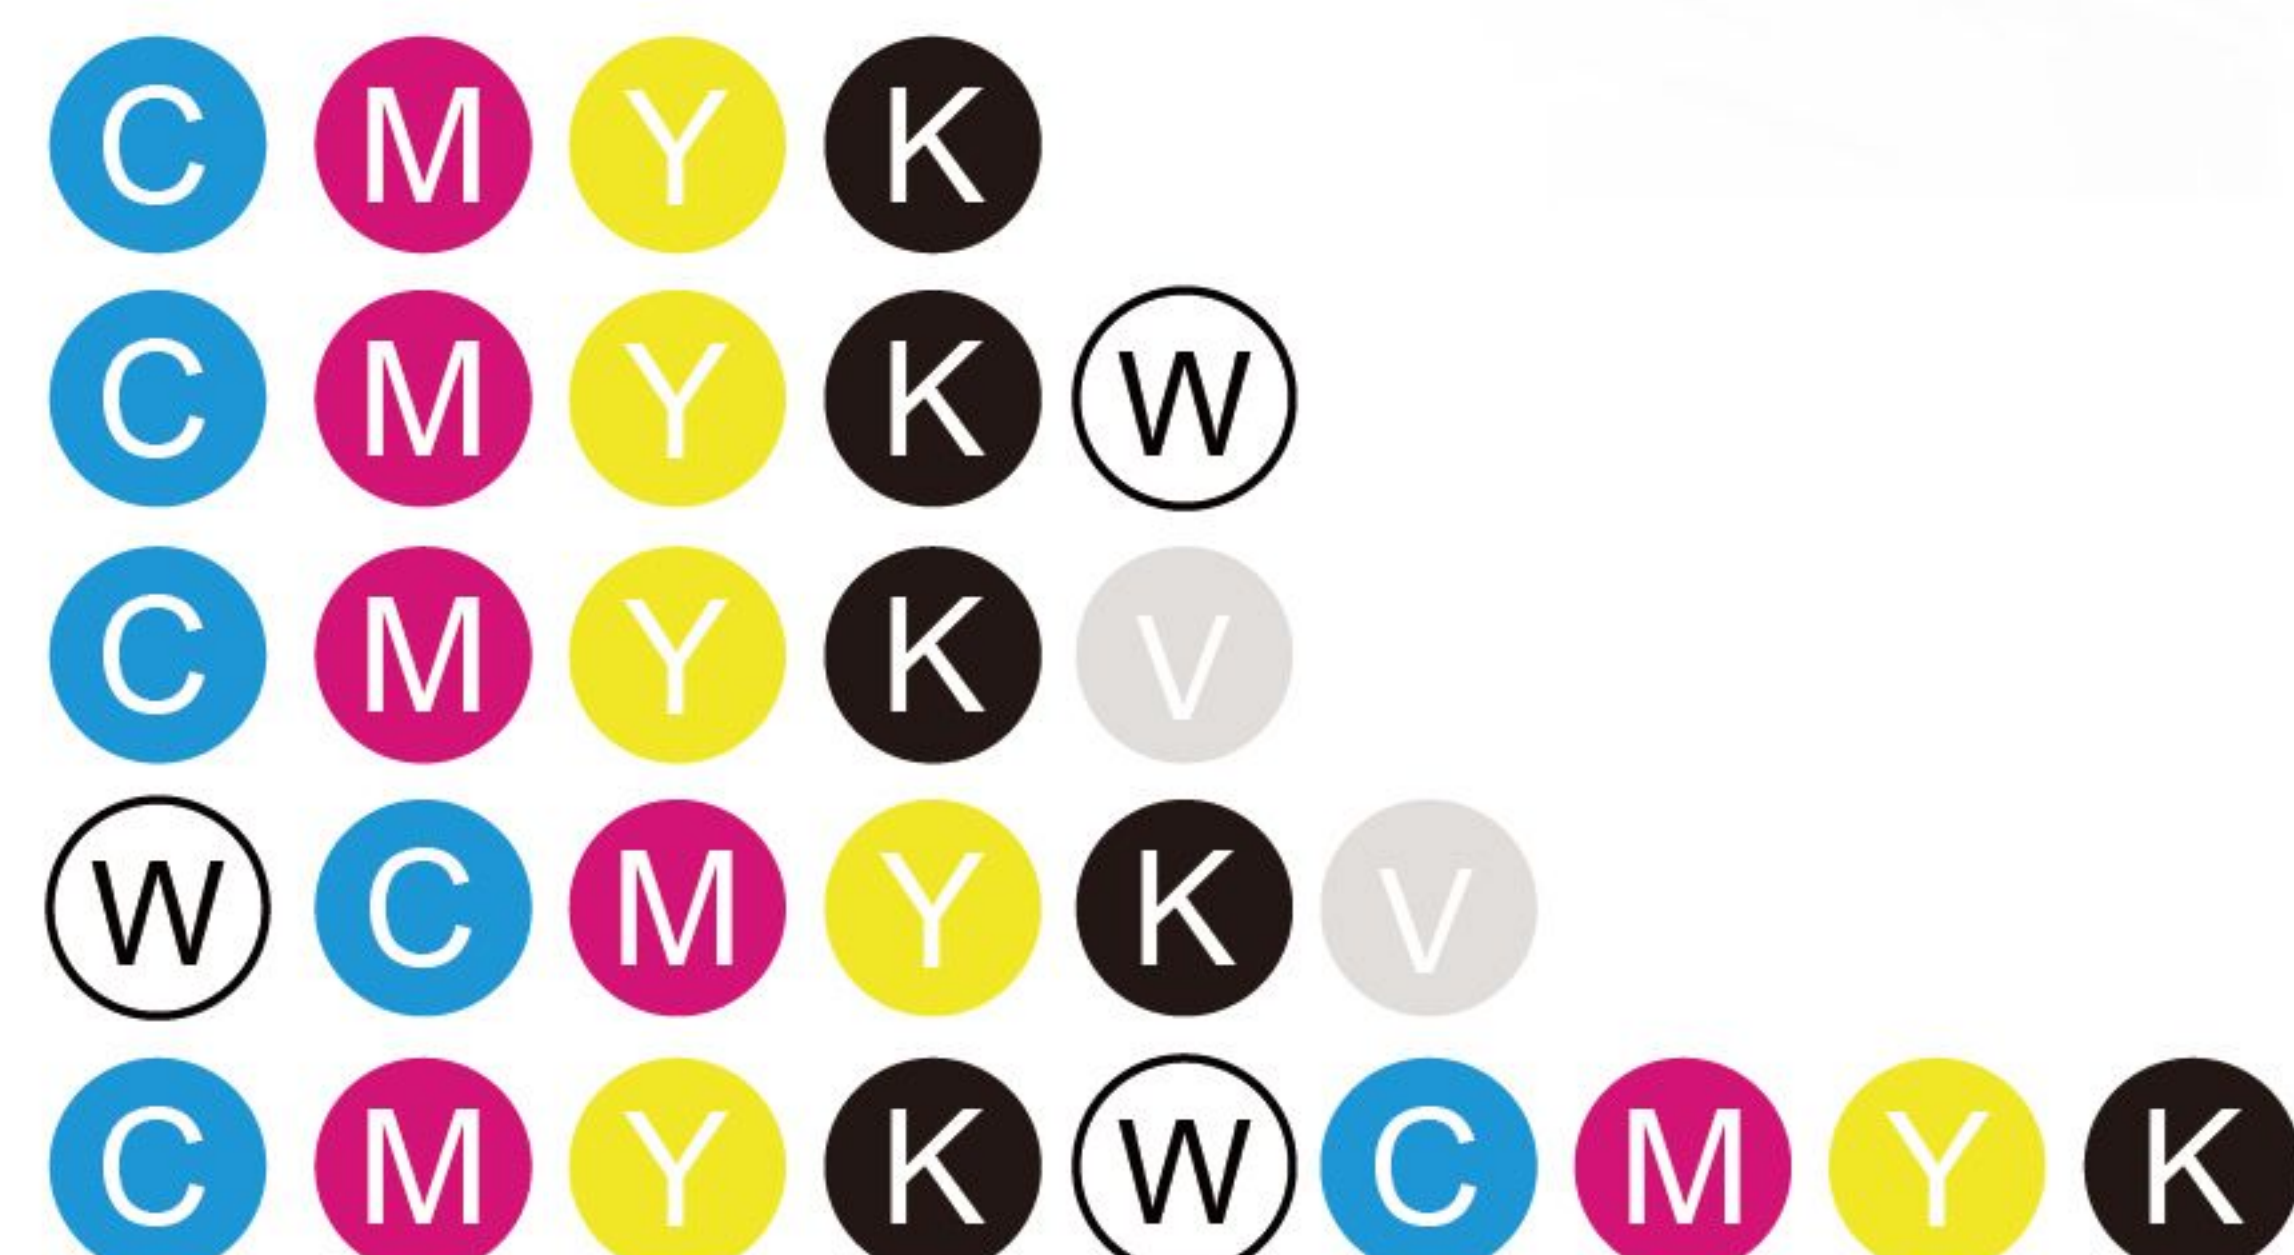


W+CMYK+V

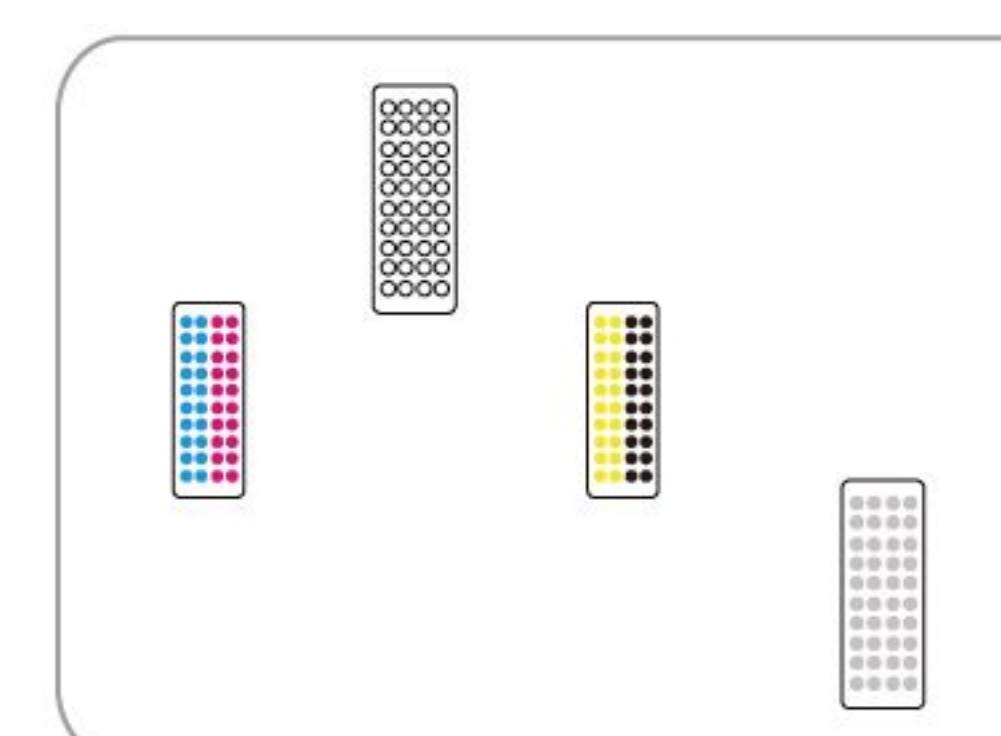


CR-3200UV PLUS (A)

CMYK+W+CMYK

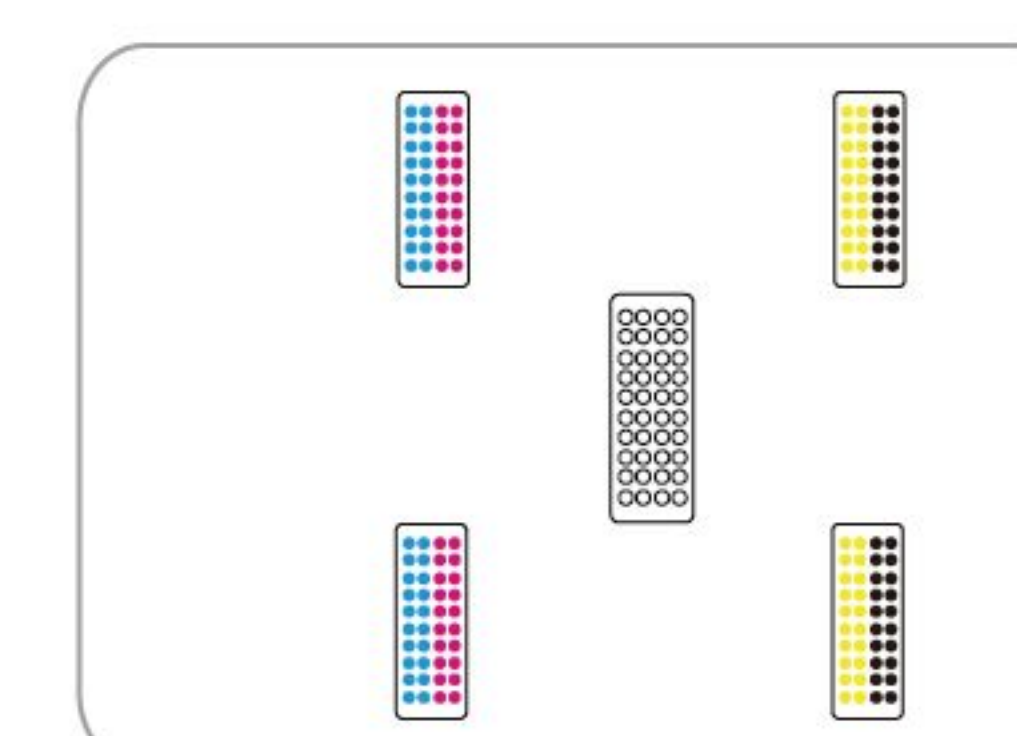


CR-3200UV PLUS (B)

CMYK

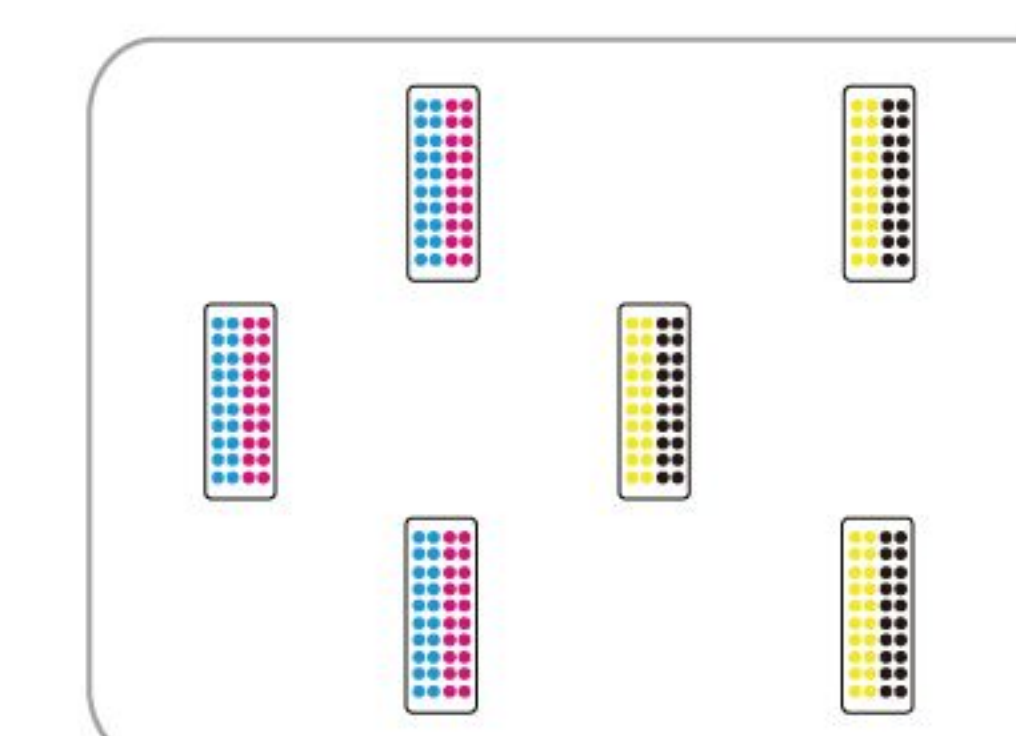

CR-3200UV PLUS (C)

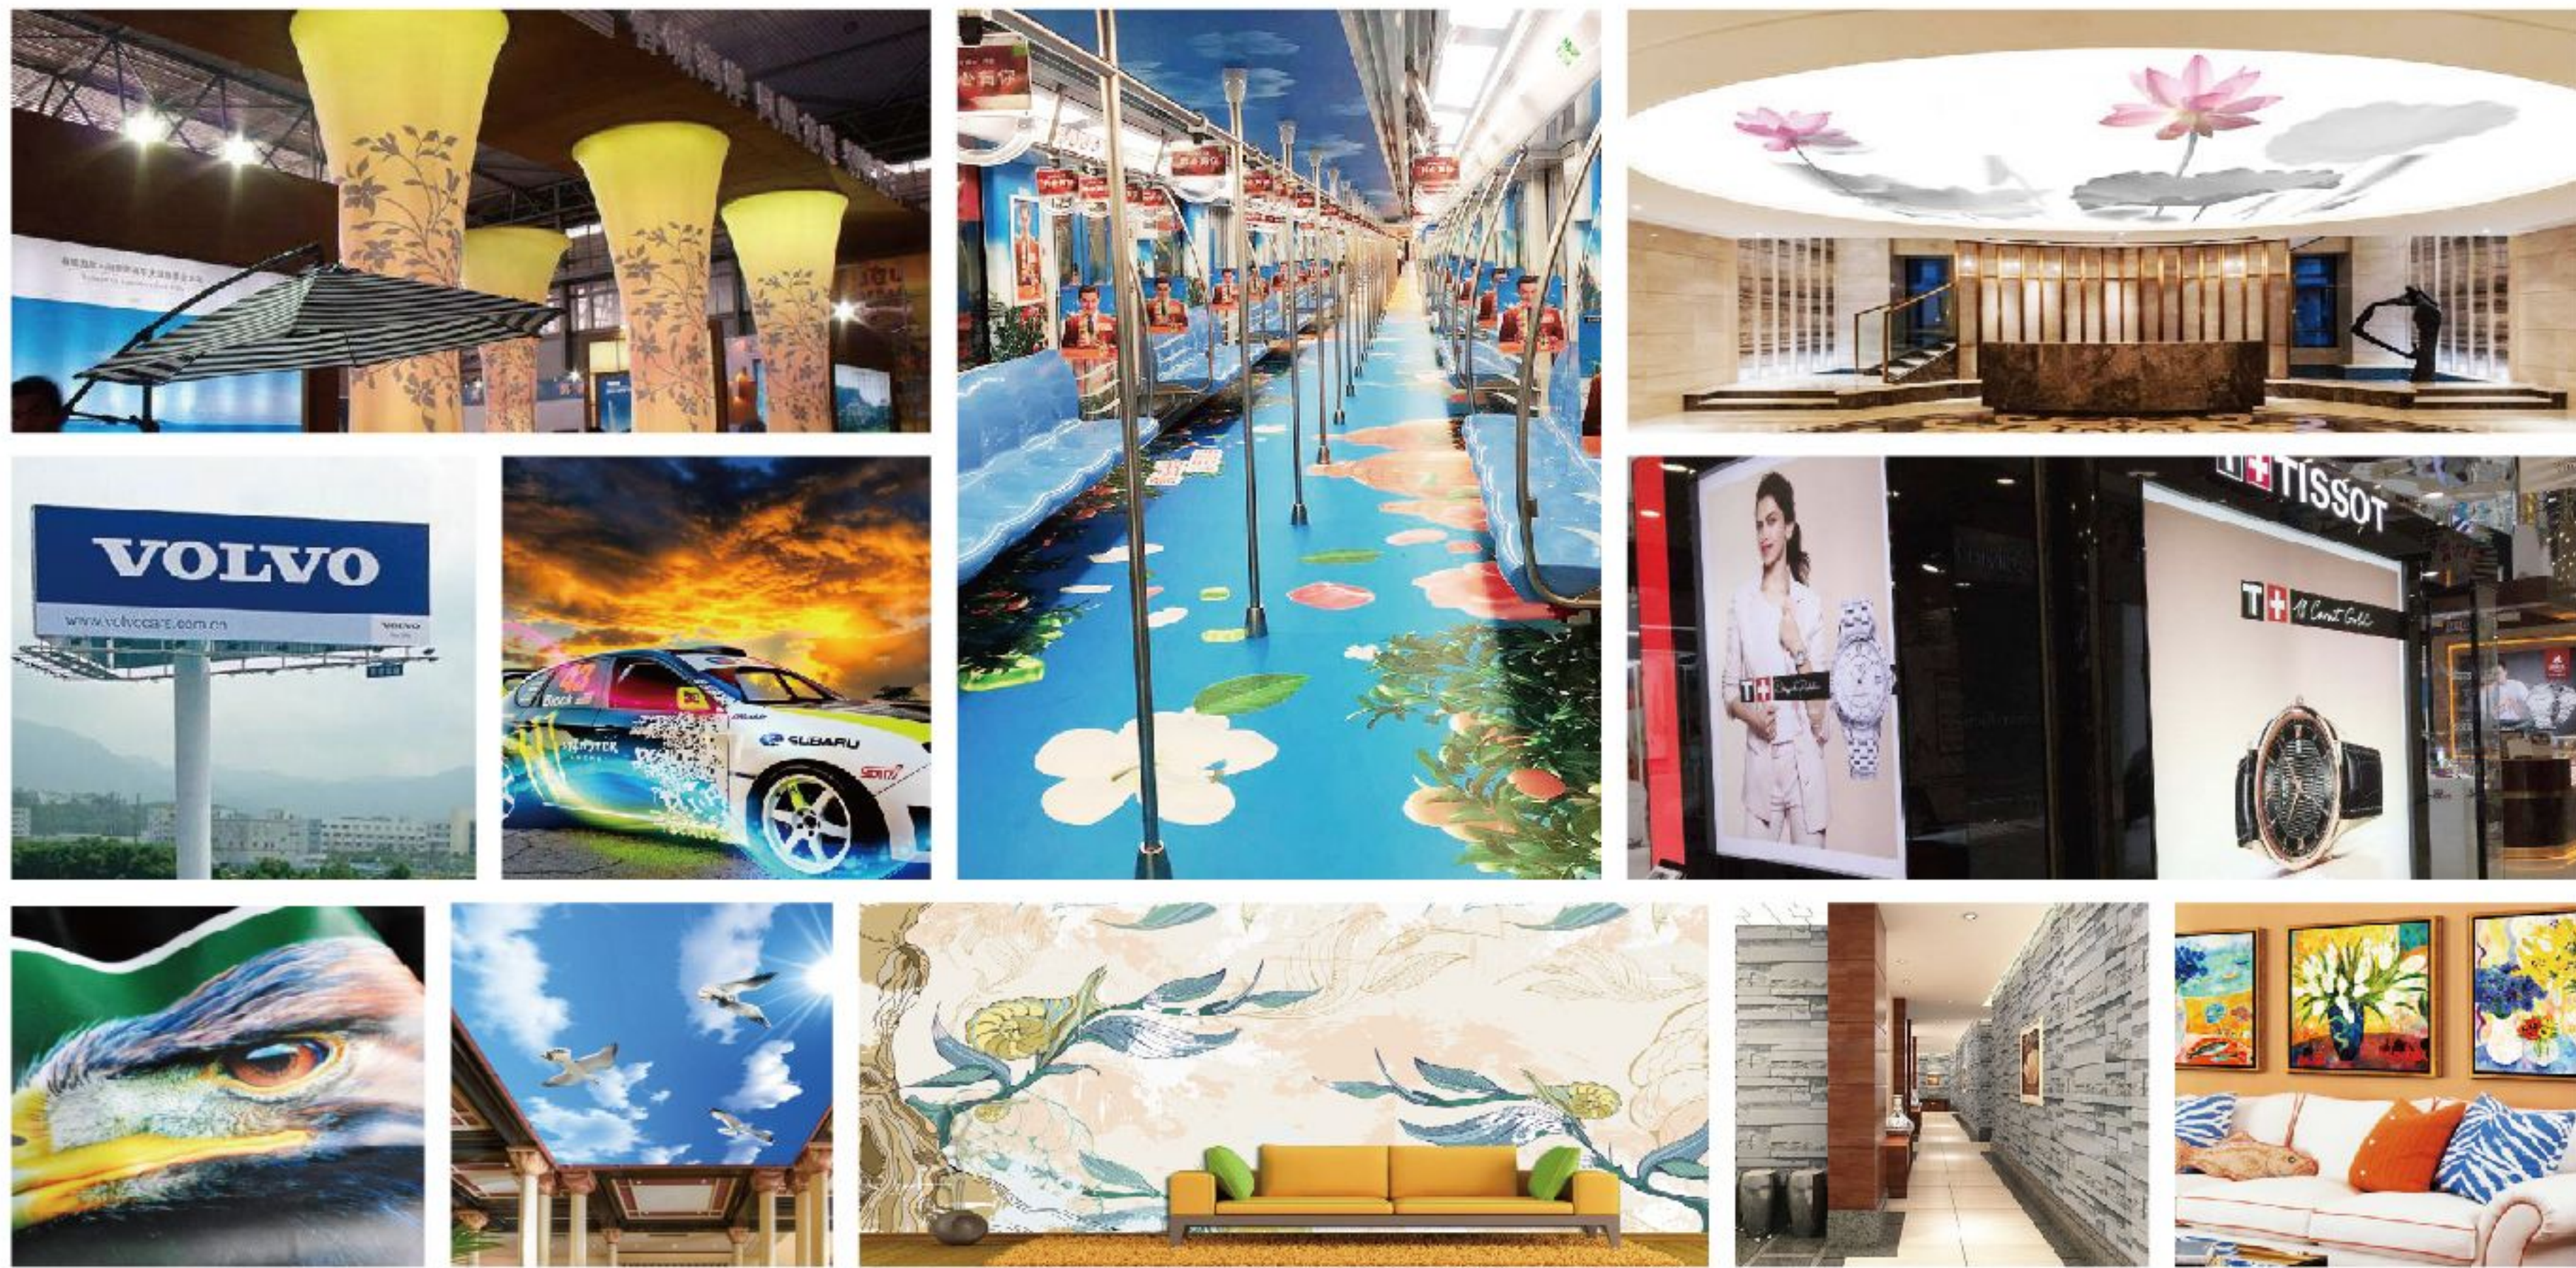

Wide applications in light box, soft film, 3P fabric, scraping fabric, vinyl, light film, wallpaper, wall fabric, canvas, silk fabric, leather and etc.

6 Gen5 print heads arrangement (CMYK) :

Front Light 600x600dpi	67 m²/h
Front Light 600x900dpi	45 m²/h
Backlit 600x900dpi	33 m²/h
Backlit 600x1200dpi	28.6 m²/h

6 Gen6 print heads arrangement (CMYK) :

Front Light 600x600dpi	87 m²/h
Front Light 600x900dpi	58 m²/h
Backlit 600x900dpi	43 m²/h
Backlit 600x1200dpi	37 m²/h

Technical Specifications


Model	CR-3200UV PLUS(A)		CR-3200UV PLUS(B)		CR-3200UV PLUS(C)	
Print Head	Four Industrial Head		Five Industrial Head		Six Industrial Head	
Printing Resolution	300dpi、 600dpi、 900dpi、 1200dpi					
Acceptable Media Diameter	Width	210-3250 mm				
	Thickness	Maximum 0.039 mil (1 mm)				
	Weight	Heavy-duty Media Feeding System has no limit for roll diameter of media				
		Economic Media Feeding System is suitable for roll media diameter less than 210mm				
Printing Width	210-3200mm					
Ink	Type	LED UV Ink				
	Capacity	Continuous Ink Supply System (1.5L ink tank)				
	Color	CMYK+W+GL	CMYK、	CMYK+W、	CMYK+W+CMYK	CMYK
Ink Curing Unit	Dual UV LED Lamps					
Printing Resolution	Maximum 1200 dpi					
Interface	USB 2.0					
Power Supply	AC 220V ±5 %, 16A, 50Hz ±1					
Dimensions(with stand)	213(W)x47(D)x62(H) in. 5410(W)x1200(D)x1570(H) mm					
Weight(with stand)	1200 kg					
Package Dimensions	218(W)x49(D)x74(H) in. 5530(W)x1245(D)x1870(H) mm					
Package Weight	2000 kg					
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15℃ to 32℃] / Humidity: 35 to 80% (no condensation)				
	Power off	Temperature: 41 ℉ to 104 ℉ [5℃ to 40℃] / Humidity: 20 to 80% (no condensation)				
Accessorie	USB cable, media clamp, manual, ink cartridges, RIP software, etc.					

- - High-efficiency UV LED technology;
- - Environmentally friendly UV ink meets international environment standards;
- - Industrial-grade structure, easy to operate, high stability;
- - Upgraded dual guide rails ensure more stable printing;
- - The media system with torque motor and air-shaft makes more stable rolling media;
- - Equipped soft film tension system offers suitable pressure for various media.


With LED UV curing technology, CR-3200 UV PLUS is one of the most competitive UV roll to roll printers which characterizes with excellent quality, high stability and easy operation. CR-3200 UV PLU Senables to make high quality design in the most cost-effective way.

Maximum 6 Ricoh Gen5 print heads

Three lines print heads in staggered layout makes the highest productivity and various applications with optional CMYK, W+CMYK, CMYK+W, CMYK+W+CMYK (three layers) and W+CMYK+V (three layers) color modes.

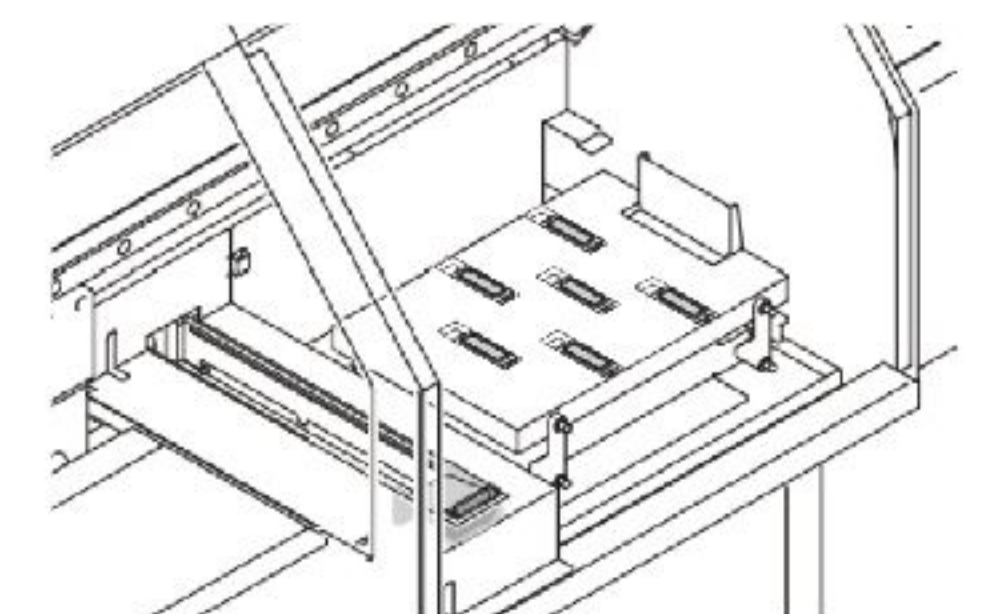

Varnish is above color,
Color is above white

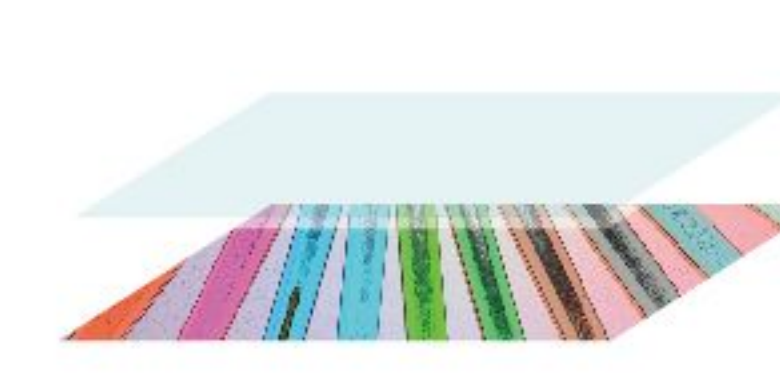

Varnish is above color



Color is above white

More stable upgraded media feeding system



New designs including adjustable air-driven pinch roller system , upgraded media roller surface and feed motor control system ensure stability of media feeding.

NEW soft film feeding system

Air-driven moisture system, pinch roller and soft film feeding system

