


# Highest Performance Model of LAMI Revo Series

In order to meet the request, "Can you laminate without 4 side margins?", post-processing used to be required. With Revo-Flex, you can easily select With/No Margin, and stable processing with high accuracy is possible. LAMI Corporation will continue to take on challenges with the slogan "Revolution with Lamination".

Revo Flex

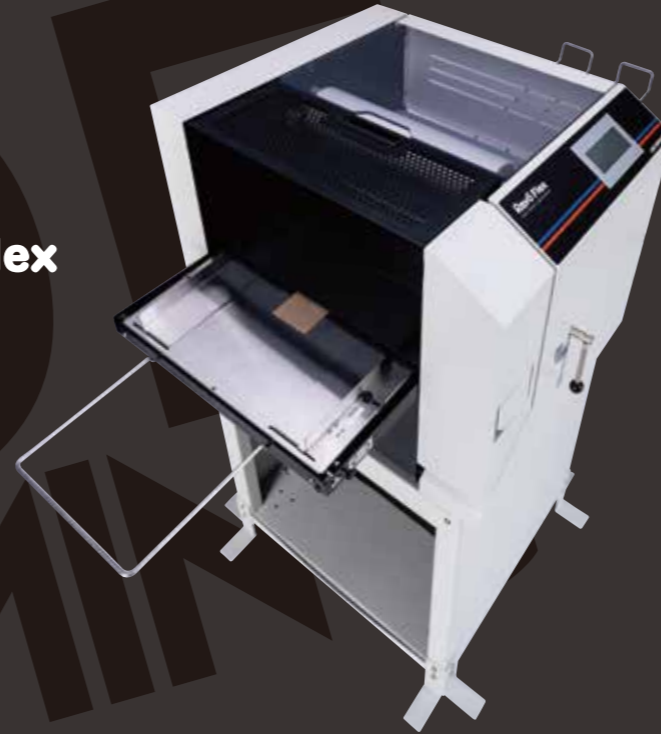

With/No Margin Function



Sheet Feed Skew Adjustment



Various Film Lineup

## IV Side Trim Function

## Fully Automatic Double Sided Lamination

### > POINT

#### 1. Full Automation

Feeding, Laminating, Cutting&Trimming are fully automated.

Press the start button and walk away.

#### 2. With/No Margin Setting

Long-awaited new feature of Revo Series, No troublesome post-processing is required.



#### 3. With/No Film Waste Setting

Saving film means saving money. No film waste processing is possible for the With Margin mode.

#### 4. Stable, Beautiful Finish

Sheet sizes are detected by the sensor and uniform lamination can be performed. If the sheet is skewed, adjust with the feed tray knob easily.

#### 5. Selectable Film Lineup

Various films can be selected according to the application. Different thicknesses (38μ = 1.5mil to 150μ=6mil), surface types (Gloss/Matte) can make documents more expressive and suitable for any situation.



Authorized Revo Film

**Revo-Flex**

Max. Laminating Width	320mm(=12.6inch)										
Max. Laminating Thickness	0.4mm (=400μ)(=157mil) including paper and film										
Available Paper Size	A3/A4/A5/B4/B5/Letter/Digital										
Available Paper Thickness	0.07-0.25mm (64 ~ 240g/m2 /gsm)										
Laminating Speed	0.7-2.0m(=27.5-78.7inch)/min										
Processing Temperature	OFF, 80-140°C (=176-284°F)										
Warm-Up Time	Approximately 5 minutes (For 100°C setting)										
Power Requirements	AC100 ~ 120V(50/60Hz) or AC220 ~ 240V(50/60Hz)										
Max. Power Consumption	JP: 0.9kW EU: 1.1kW US: 1.2kW										
Size (W×D×H)	1,300mm(=51inch) x 610mm(=24inch) x 1,080mm(=42.5inch) (With the stand, feeder tray, extension tray, stacker)										
Weight	70kg(=154.3lb)										
Feeder Tray Capacity	200 sheets (Copy paper)										
Finished Size (W×D)	<table border="0"> <tr> <td>A3 With-Margin: 303×426mm(=12×16.8inch)</td> <td>No-Margin: 294×417mm(=11.6×16.4inch)</td> </tr> <tr> <td>A4 With-Margin: 303×216mm(=12×8.5inch)</td> <td>No-Margin: 294×207mm(=11.6×8.2inch)</td> </tr> <tr> <td>B4 With-Margin: 263×370mm(=10.4×14.6inch)</td> <td>No-Margin: 254×361mm(=10×14.2inch)</td> </tr> <tr> <td>B5 With-Margin: 263×188mm(=10.4×7.4inch)</td> <td>No-Margin: 254×179mm(=10×7inch)</td> </tr> <tr> <td>A5 With-Margin: 216×154mm(=8.5×6.1inch)</td> <td>No-Margin: 207×145mm(=8.2×5.7inch)</td> </tr> </table> <p>*Error range: ± 0.5 mm (W, D)</p>	A3 With-Margin: 303×426mm(=12×16.8inch)	No-Margin: 294×417mm(=11.6×16.4inch)	A4 With-Margin: 303×216mm(=12×8.5inch)	No-Margin: 294×207mm(=11.6×8.2inch)	B4 With-Margin: 263×370mm(=10.4×14.6inch)	No-Margin: 254×361mm(=10×14.2inch)	B5 With-Margin: 263×188mm(=10.4×7.4inch)	No-Margin: 254×179mm(=10×7inch)	A5 With-Margin: 216×154mm(=8.5×6.1inch)	No-Margin: 207×145mm(=8.2×5.7inch)
A3 With-Margin: 303×426mm(=12×16.8inch)	No-Margin: 294×417mm(=11.6×16.4inch)										
A4 With-Margin: 303×216mm(=12×8.5inch)	No-Margin: 294×207mm(=11.6×8.2inch)										
B4 With-Margin: 263×370mm(=10.4×14.6inch)	No-Margin: 254×361mm(=10×14.2inch)										
B5 With-Margin: 263×188mm(=10.4×7.4inch)	No-Margin: 254×179mm(=10×7inch)										
A5 With-Margin: 216×154mm(=8.5×6.1inch)	No-Margin: 207×145mm(=8.2×5.7inch)										
Accessories	Feeder tray, extension tray, stacker, power cable, instruction manual, trash can, stand, stand assembly manual, tools (for stand assembly), screws (for stand assembly)										
Price	Open Price										

# FOUR SIDE TRIMMING

**Revo Flex**



**Revo Flex**

**LAMI CORPORATION INC.**  
 URL <https://www.lami-corporation.co.jp/>  
 TEL +81-6-6453-4293/FAX +81-6-7177-9833  
 E-mail [lami-support-global@lami-corporation.co.jp](mailto:lami-support-global@lami-corporation.co.jp)



*Specifications and designs described here are subject to change without notice for product improvement.*