


GIO-CAMM HMT Hotmelt-Glue Print & Cut Film

GIO-CAMM HMT is made with Hotmelt Glue film for print and computer plotter-cut. It applies to the white or light colored textile. The design can be heat-transferred just after weeding the unwanted part without application tape. It makes the working much faster and easier.

- Recommended fabric: Cotton, Polyester, Cotton/Polyester Blends, Lycra

COMPOSITION


PU Resin	10 %	
Polyurethane Glue	30 %	
PET Film	60 %	



APPLICATION INSTRUCTIONS



- 1) Print & Cut the material In " mirror image"
- 2) Weed away unwanted part
- 3) Cut the design by piece

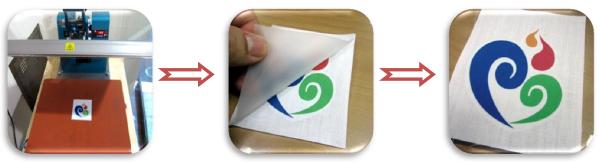

- 4) Heat-press at 150°C for 8 seconds
- 5) Remove the PET carrier



CARE INSTRUCTIONS FOR THE FINISHED PRODUCT









Washing

Washer : Standard Household Washing Machine

Temperature : 40°C

: Standard Household Detergent Detergent : Colored Clothing without Pre-wash Setting

Maximum washing time on highest temperature not to exceed 12 minutes.

Maximum total washing time not to exceed 50 minutes.

Test fabric for dye migration.

> Bleaching

Not Recommended

> Drying

Tumble Dry Low

> Ironing

Do not use steam, use a cool or warm temperature setting, direct contact ironing is available.

SPECIFICATION

Standard Width	Roll Length	Q'ty / Carton	Weight / Carton	Volume / Carton
510 mm	50 MTS	50 MTS	8.5 KGS	0.013 CBM
510 mm	25 MTS	50 MTS	9.0 KGS	0.020 CBM
1,020 mm	25 MTS	25 MTS	9.0 KGS	0.028 CBM

** Thickness : 70 ~80 Micron

STORAGE

- Keep away from the direct sunlight, hot and humid place.
- > Use it within 1 year from the date of the lot number (production date).

GIOLITE LUMIAN Co., LTD

RM408, Woolim E Biz Center #1, 170-5, Guro-Dong, Guro-Gu, Seoul, KOREA

Tel: +82-2-869-1988(Rep.) Fax: +82-2-869-7711

email: giolite@giolite.com Website: www.giolite.com