



Moving The World Together

ElectroMechanical
Automated System

Automated system for swing and folding Gates

**4 IN 1 UPGRADING SYSTEM
(5 CHANNEL ONLY)**

**AUTOMATED SYSTEM
FOR SWING AND FOLDING GATE**



Panic Alarm



Intruder Alarm



System Lock



Pillar Light
(Optional)

- Can open either left, right or both panel
- Automatic dual speed adjustment
- Smooth & silent gate operation
- 24 hour backup power
- Manual operation
- 24vdc Heavy duty

TECHNICAL SPECIFICATION

Supply Power	: AC 220V, 60Hz/50Hz
Operating Voltage	: DC 24V for Normal Speed DC12 for Cushioning Speed
Max.Length of Gate	: 3.5 Meter per Wing
Safety Clutch	: Electronic Current Sensing
Electronic Controller	: Micro- Processor Based
Position Limit Device	: Electronic Fuzzy Logic
Driving Method	: Electro - Mechanical screw drive piston type
Back-up Battery	: 12 volt 7AH Rechargeable
Max. Gate Weight	: 350kg per Wing with Force Adjustable
Motor Power Supply	: 12 - 24V
Travel Time 90 (sec)	: 10 - 15sec
Working Temperature (°C)	: 10°C to 50°C
Weight (KG)	: 2.9 KG


REMOTE CONTROL



5 Channel Remote



2 Channel Remote

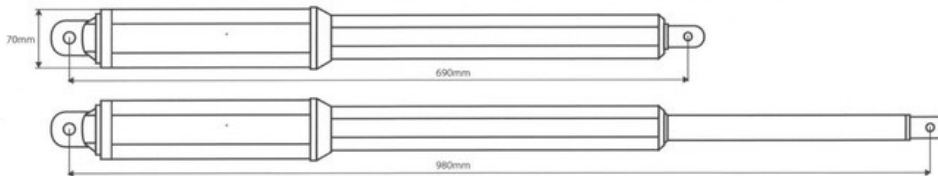

For Enquiries, Please Contact :