



# Wall Mount Series


**P1550WM - 15U**

**G1550WM - 15U**




## Features & Specifications

- Flexible PERFORATED and PERSPEX front door
- Side panels
- 19" server compatible panel mounting members
- 20 sets of M6 caged nuts & screws
- 13A power point channel complete socket
- High quality epoxy powder coating

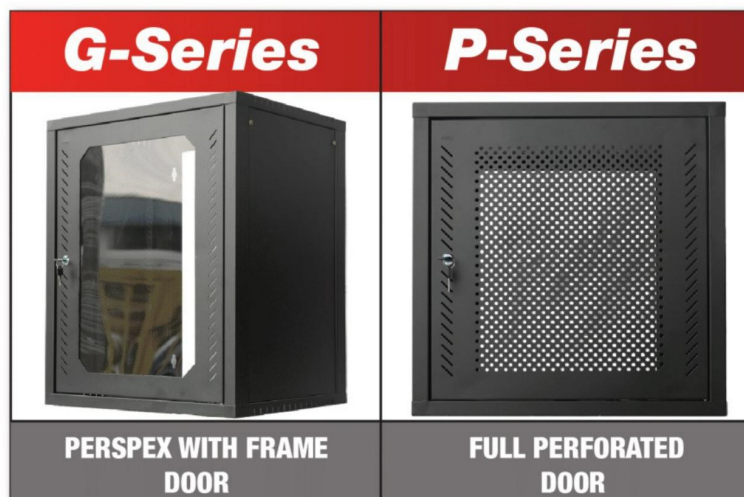

**Top Cover  
Vented Design**



**Equipment  
Tray**



**3 Gang  
Power Distribution**



**Earthing  
cable**



**Side Panel  
Latch**



**19" Panel  
Mounting**

Model	Capacity (U)	Height (mm)	Width (mm)	Depth (mm)	Packing Dimension (H*W*D)	Weight (kg)
P1550WM	15	730	600	500	740 x 610 x 510	20.5
G1550WM	15	730	600	500	740 x 610 x 510	21.5

☐ Black
 ☐ Grey
 ☐ Beige

\* P = Perforated door, G = Perspex with frame

\* Customized sizes available upon request