

# HAC-HFW1500TL-A-S2

**Dahua**



Dahua HAC-HFW1500TL-A-S2. Dahua 4 in 1 bullet camera PRO series with Smart IR of 80 m for outdoor. 1 / 2.7 "CMOS of 5MP. 4 in 1 output (HDCVI / HDTV / AHD / 960H) switchable by OSD. 2.8 mm (111 °) fixed lens. 0.005 lux. ICR filter. OSD, AWB, AGC, BLC, HLC, digital WDR, 2D-NR, privacy masks. It incorporates a microphone. IP67. 3AXIS. 12V DC. Hac-hfw1500tlp-a-0280b-s2.

## Specs

1 / 2.7 "5 megapixel CMOS sensor

Digital resolution: 5MP (2880x1620), 4MP (2560x1440), 1080P (1920x1080), 960H (960x756)

Images per second: 25 ips @ 5MP (CVI), 25 ips @ 4MP (CVI / TVI / AHD), 25 ips @ 1080P (CVI)

4-in-1 output switchable via OSD

Day / night mode with removable mechanical filter (ICR)

0.005 lux F1.6 (color) / 0 lux IR On


Smart IR: 2 LEDs, up to 80 meters

2.8mm fixed lens

Angle of view: 111 ° (H), 58 ° (V), 132 ° (D)

OSD via coaxial (5MP video up to 700 meters)

Imaging modes: BLC, HLC, Digital WDR, 2D-NR, Mirror

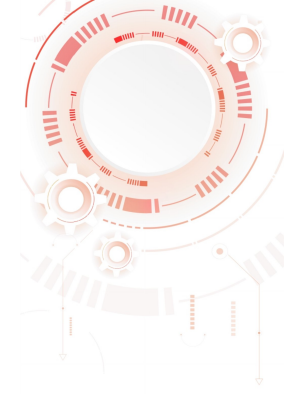

Automatic and manual white balance

Automatic and manual gain control

Supports 8 zone privacy mask

Incorporates microphone

Power supply: 12V DC ( $\pm 30\%$ )

Consumption: 5.2W (max.)

Storage temperature  $-40^{\circ}\text{C} \sim +60^{\circ}\text{C}$

$-40^{\circ}\text{C} \sim +60^{\circ}\text{C}$  operating temperature

Relative humidity:  $<95\%$  (non-condensing)

Degree of protection IP67

Metal and plastic housing

Dimensions: 80.2 (W) x 76.2 (H) x 198.9mm

Weight: 270g

3AXIS:  $0^{\circ} \sim 360^{\circ}$  (PAN),  $0^{\circ} \sim 90^{\circ}$  (TILT),  $0^{\circ} \sim 360^{\circ}$  (Rotation)

- DAHUA-2808