



# VIBRATORY TRUSS SCREED PNEUMATIC (VTS-P Series)

## Features:


TOKU Truss Screed with engine-driven are ideal for slab, bridge and highway applications.

The simple and unique aluminum A-frame design provides maximum structural strength and level and allowing ease of transportation and lifting.

TOKU Truss Screed has 3 main components: The Trusses, The Engine Drive Kit, and The Winch Kit. The trusses come in 3 lengths options that can be put together to fit the length of your application. Available length of Trusses are 610mm, 1524mm and 2268mm.



Pneumatic		
Model	VTS-P9	VTS-P12
Length (meter)	9	12
Width	440mm	440mm
Trusses Height	425mm	425mm
Overall Height	880mm	880mm
Air Consumption (cfm)	110	144
Weight (kg)	300	390

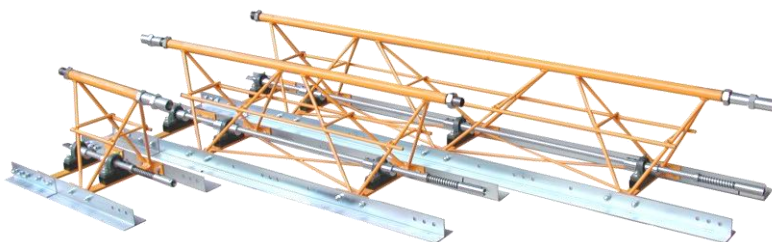

Trusses	Weight
610mm	20.5 kg
1524mm	43.5 kg
2268mm	65.5 kg
1524mm Engine Drive Kit	80 kg
1524mm Winch Kit	50 kg