





Individual Swivelling Mechanism

Rectangle Housing


Housing Configuration



Single

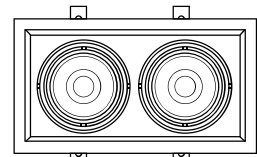

Double

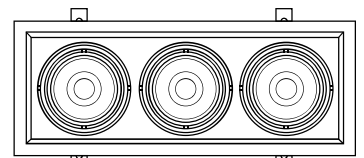

Triple

Part No	lumiBA1500C	lumiBA1500N	lumiBA1500W
Correlated Color Temp $\pm 5\%$	Cool White 5700K	Natural White 4000K	Warm White 3000K
CRI	Ra > 80 / R9 > 0		
Luminance $\pm 5\%$	1500 lumens		1300 lumens
Rated Wattage	12W		
Lumens per Watt	125	108	
Input Power (DC)	180-265V 50/60Hz		
	240V @ 50mA		
Power Factor	> 0.9 @ 240VAC		
Working Temp	Ambient Temperature Max 50°C		
Projection Angle	36°		
Dimension / Size	111mm ( $\phi$ ) x 80mm (H) (bulb only) 170mm ( $\phi$ ) Single Round w/Adjustable Ring 335mm (L) x 185mm (W) Rectangle Double Bulb w/Adjustable Ring		
Opening Hole	160mm ( $\phi$ ) Single Round 315mm (L) x 165mm (W) Rectangle Double Bulb		
Weight $\pm 5\%$	300g (Bulb only) 500g Single Round 1000g Rectangle Double Bulb		
Warranty	1 Year		