



**APPLICATIONS:** Street Lights, Carpark Area, Walkways, Storage Yard, Factory Compound...




	<b>lumiST Series Street Light</b>
CRI	Ra > 80 / R9 > 0
Input Power (DC)	180-277V 50/60Hz (100-277V 50/60Hz Optional)
Power Factor	> 0.95 @240VAC
Working Temp	Ambient Temperature Max 50°C
Projection Angle	140° x 75°
IP Rating	IP66
Housing Material	Die Cast Aluminium Base (Heatsink) & Lens

Part No	Wattage	Colour Temp	Lumens	Lumens Per Watt	Input Power (AC)	Dimension / Size	Weight	Warranty
ST17000C	150	5700K	17000	113	240V @ 625mA	613.7mm(L) x 215mm(W) x 89.3mm(D)	5100g	2 Years
ST17000W		3000K	16000	107			± 5%	
ST9000C	75	5700K	9000	120	240V @ 313mA	413.3mm(L) x 160mm(W) x 89.30mm(D)	3200g	
ST9000W		3000K	8400	112			± 5%	


Note: \* ± 10% Lux accuracy \* Test environment @ 25 °C \*Specifications subject to change without prior notice. \* Product images are for illustraton purposes only.

## Drawing (Unit: mm)


### lumiST17000

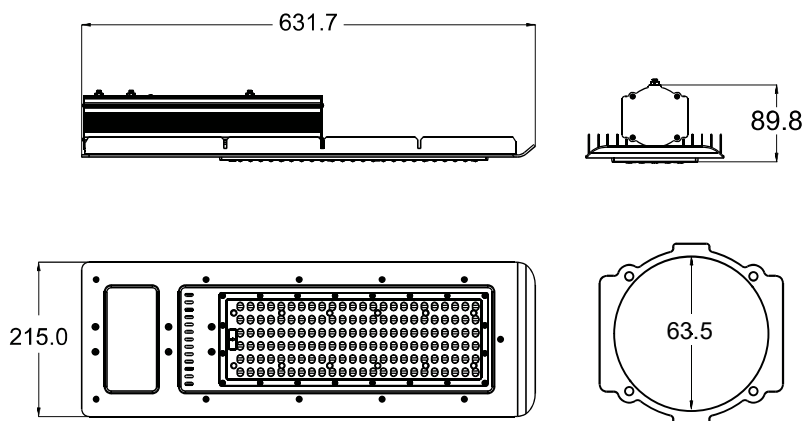


## Luminous Intensity Distribution Diagram

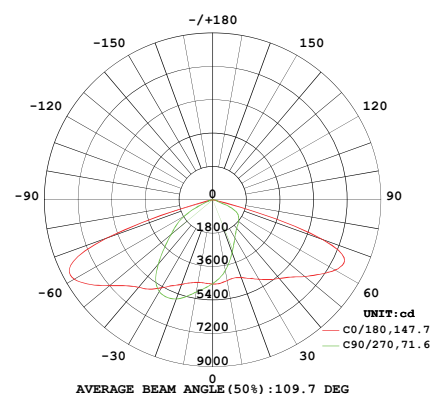

### lumiST9000

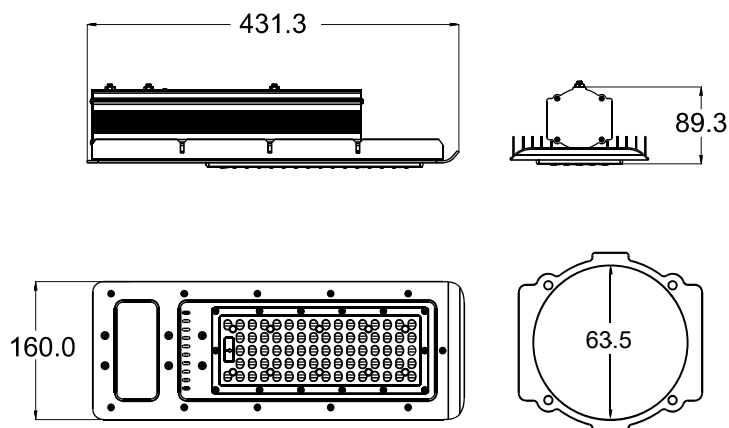

## Luminous Intensity Distribution Diagram

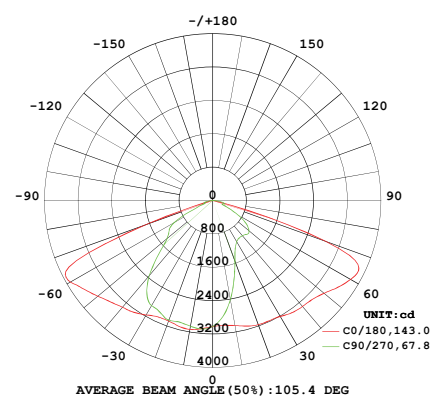

Note: \*  $\pm 10\%$  Lux accuracy \* Test environment @ 25 °C \* Specifications subject to change without prior notice. \* Product images are for illustraton purposes only.