



APPLICATIONS: Warehouse, Factory, Shopping Mall, Car Park, Indoor Sports Center...

60° Reflector Cap



90° Reflector Cap



HB Highbay Light	
CRI	Ra > 80 / R9 > 0
Input Power (AC)	100-277V 50/60Hz
Power Factor	> 0.95 @240VAC
Working Temp	Ambient Temperature Max 50°C
Projection Angle	60° / 90°
Housing Material	Die Cast Aluminium Heatsink & PC Lens

Part No	Wattage	Colour Temp	Lumens	Lumens Per Watt	Input Power (AC)	Dimension / Size	Weight	Warranty
HB30000C	210	5700K	30400	145	240V @900mA	300mm (H) x 210mm (Ø)	3300g	3 Years
HB24000C	160	5700K	23300	145	240V @690mA			
HB24000W		3000K	20900	130				
HB15000C	105	5700K	15300	145	240V @440mA	205mm (H) x 210mm (Ø)	2250g	
HB15000W		3000K	13700	130				
HB9500C	65	5700K	9500	145	240V @270mA			
HB9500W		3000K	8550	130				


Reflective Cap

HBC90	90° (120mm (H) x 450mm Ø)
HBC60	60° (140mm (H) x 390mm Ø)


Note: * ± 10% Lux accuracy * Test environment @ 25 °C *Specifications subject to change without prior notice. * Product images are for illustraton purposes only.

Drawing (Unit: mm)


HB30000 / HB24000

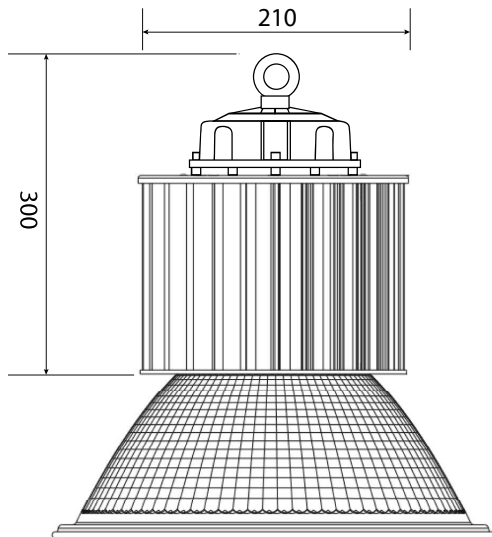



HB15000 / HB9500

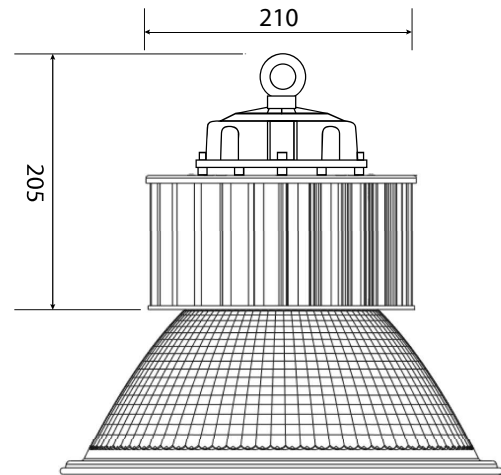

Cone Diagram for HB23000 with 60° Reflector Cap

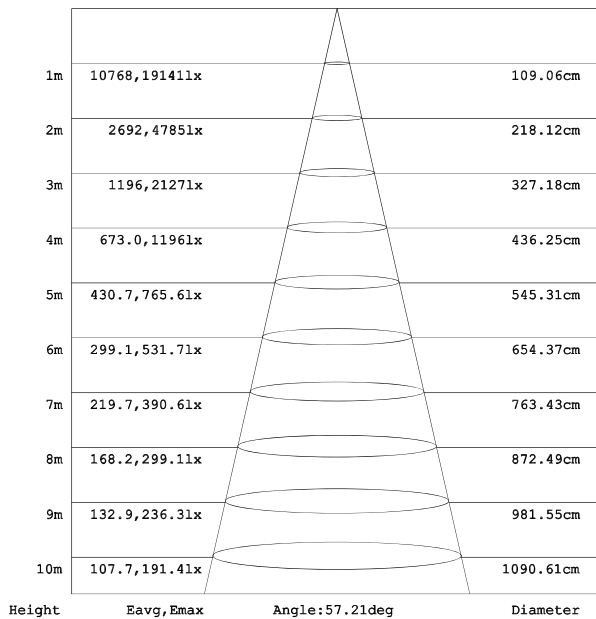

Luminous Intensity Distribution Diagrams

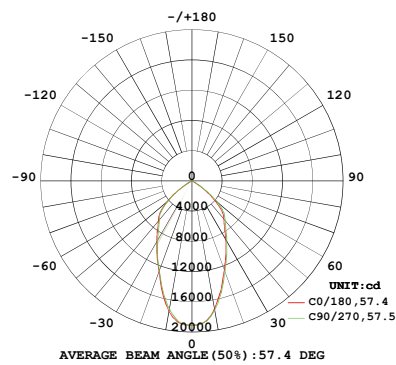

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance. For reference purpose only, for more accurate result for your environment, kindly contact us for proper simulation.

