
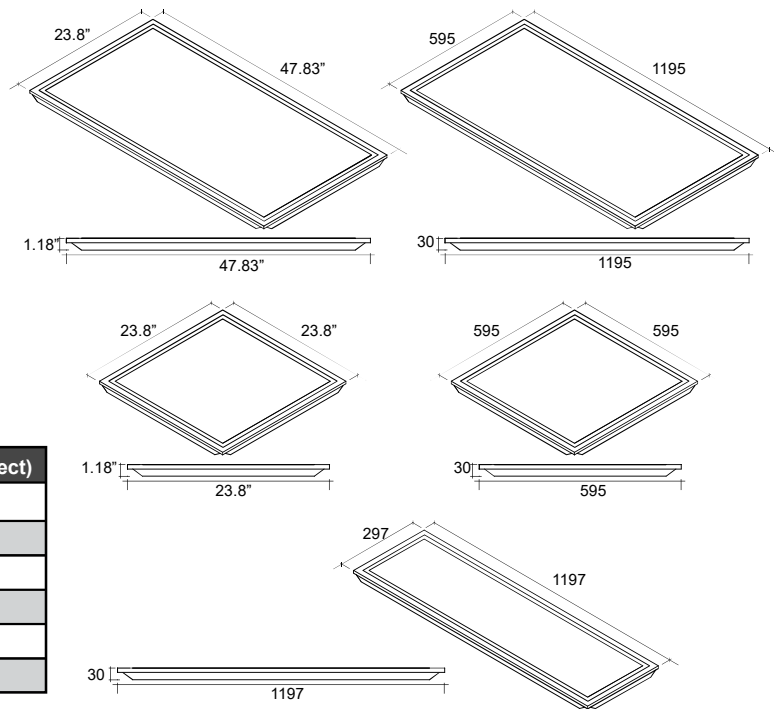


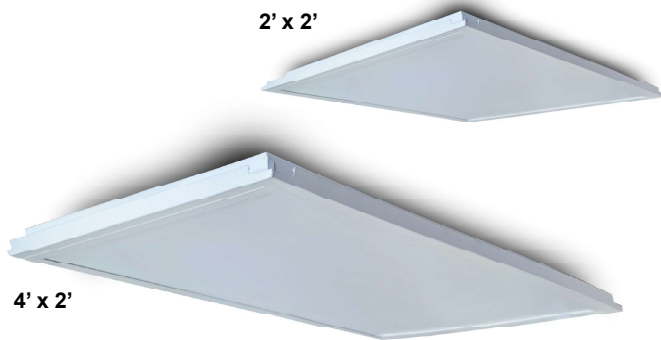

	PD Panel Light (Direct)
CRI	Ra > 80 / R9 > 0
Input Power (AC)	100-240V 50/60Hz
Power Factor	> 0.9 @240VAC
Working Temp	Ambient Temperature Max 50°C
Projection Angle	110°
Housing Material	Aluminium Profile & Frosted Cover

Part No	Wattage	Colour Temp	Lumens (± 5%)	Lumens Per Watt	Input Power (AC)	Dimension / Size	Weight	Warranty
PD7500C-I	60	6500K	7500	125	240V @ 277mA	1215mm (L) x 605mm (W) x 30mm (H)	3400g	2 Years
PD7500N-I		4000K						
PD7500W-I		3000K						
PD7500C-M		6500K	7500	125		1195mm (L) x 595mm (W) x 30mm (H)		
PD7500N-M		4000K						
PD7500W-M		3000K						
PD5000C-I	40	6500K	5000	125	240V @ 166mA	605mm (L) x 605mm (W) x 30mm (H)	1900g	
PD5000N-I		4000K						
PD5000W-I		3000K						
PD5000C-M		6500K	5000	125		595mm (L) x 595mm (W) x 30mm (H)		
PD5000N-M		4000K						
PD5000W-M		3000K						
PD5000C-M14		6500K	4700	117		1197mm (L) x 295mm (W) x 30mm (H)	1650g	
PD5000N-M14		4000K						
PD5000W-M14		3000K						
		4230	106					

Note: * ± 10% Lux accuracy * Test environment @ 25 °C *Specifications subject to change without prior notice. * Product images are for illustration purposes only.