





APPLICATIONS: Street Lights, Carpark Area, Walkways, Storage Yard, Factory Compound...



	ST Street Light
CRI	Ra > 80 / R9 > 0
Input Power (AC)	180-277V 50/60Hz (100-277V 50/60Hz Optional)
Power Factor	> 0.95 @240VAC
Working Temp	Ambient Temperature Max 50°C
Projection Angle	140° x 75°
IP Rating	IP66
Housing Material	Die Cast Aluminium Base (Heatsink) & Lens




Part No	Wattage	Colour Temp	Lumens	Lumens Per Watt	Input Power (AC)	Dimension / Size	Weight	Warranty
ST17000C	150	5700K	17000	113	240V @ 625mA	630mm(L) x 215mm(W) x 90mm(D)	5100g	2 Years
ST17000W		3000K	16000	107			± 5%	
ST9000C	75	5700K	9000	120	240V @ 313mA	435mm(L) x 160mm(W) x 90mm(D)	3200g	
ST9000W		3000K	8400	112			± 5%	


Note: * ± 10% Lux accuracy * Test environment @ 25 °C *Specifications subject to change without prior notice. * Product images are for illustration purposes only.

Drawing (Unit: mm)


ST17000

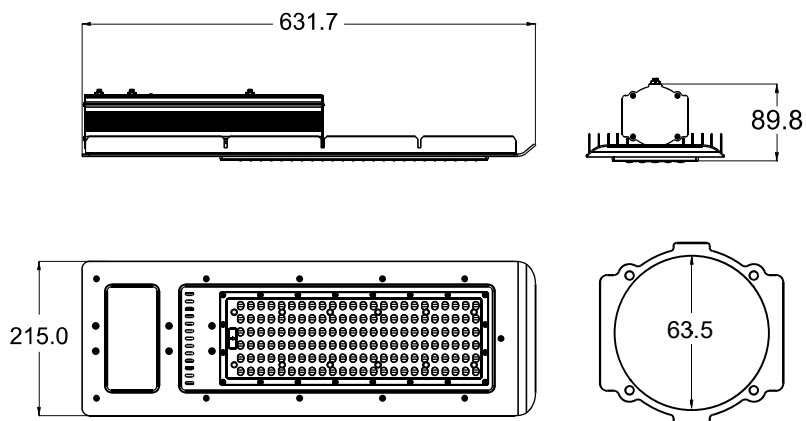


Luminous Intensity Distribution Diagram

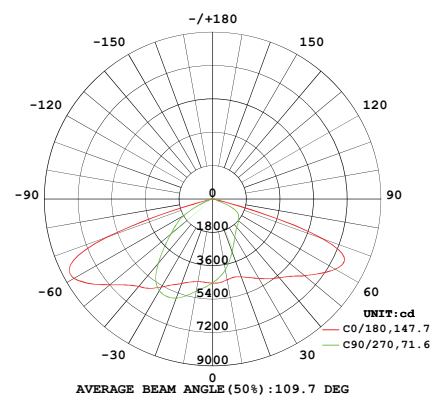

ST9000

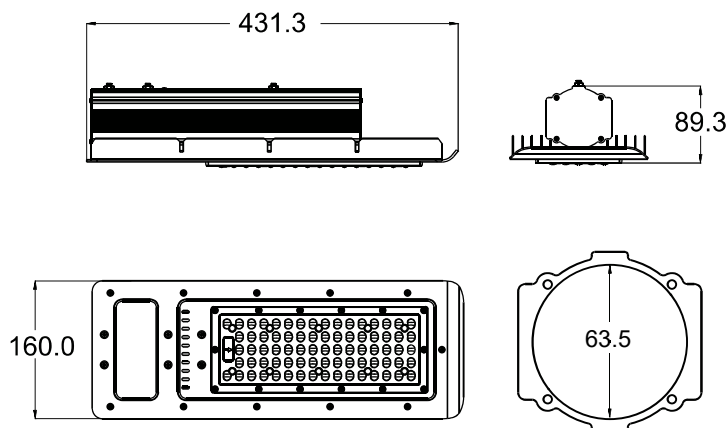

Luminous Intensity Distribution Diagram

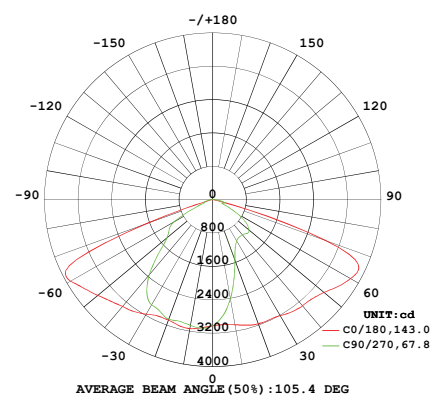

Note: * $\pm 10\%$ Lux accuracy * Test environment @ 25 °C * Specifications subject to change without prior notice. * Product images are for illustration purposes only.