

**LEISTER**

PROCESS HEAT

Hot air blower  
HOTWIND PREMIUM  
HOTWIND SYSTEM



**New!**

## The new HOTWIND PREMIUM and HOTWIND SYSTEM from Leister

The new HOTWIND PREMIUM is the successor to the hugely popular HOTWIND S. Its brushless motor ensures that this hot air blower has a long service life. The maximum air volume can now be set infinitely up to 900 l/min via the potentiometer.

The wide range of applications makes the new HOTWIND SYSTEM truly impressive: be it as a unit with integrated control or as a unit for integration in a closed loop control circuit using a system interface.

### Advantages



1		<b>Infinitely adjustable:</b> Potentiometers for stepless adjustment of the heating and blower (PREMIUM and SYSTEM).
2		<b>Remote controlled:</b> Interface with alarm contact in the HOTWIND SYSTEM for controlling the air volume and heat output, using 4 – 20 [mA] or 0 – 10 [V] signal.
3		<b>Integrated:</b> Temperature probe in the HOTWIND SYSTEM for even greater precision.
4		<b>User friendly:</b> Display on the HOTWIND SYSTEM provides the user with status information.
5		<b>Cleverly combined:</b> Main switch with integral function button for programming (SYSTEM).
6		<b>Cool:</b> The unit is automatically cooled prior to switching off by pressing the function button.

### Technical features

	PREMIUM	SYSTEM
Heat output and air volume steplessly adjustable with potentiometer	•	•
Integrated power electronics	•	•
Protection against heating element or device overheating	•	•
Brushless blower motor	•	•
Alarm output		•
Integrated temperature control		•
Remote control interface for temperature or power set point		•
Remote control interface for air volume adjustment		•
Integrated temperature probe		•
Display for showing the setpoint and actual values (°C or °F)		•



HOTWIND SYSTEM with wide slot nozzle integrated in a blow-off application.



HOTWIND SYSTEM as hot air provider in a shrinking process.

## Technical data

Voltage	V~	120	230	230	230	230	230	400
Power consumption	W	2300	2300	2300	3100	3700	3700	5400
Frequency	Hz	50/60						
Max. air outlet temperature	°C	650	650	650	800	650	650	650
Max. air flow (20 °C)	l/min.	200 – 900						
Static pressure	Pa	500						
Noise emission	L <sub>pA</sub> (dB)	< 70						
Weight without cable	kg	2.6						
Measure		see below						
Mark of conformity		CE						
Certification scheme		CCA						
Protection classe II		□						
Without connecting plug		•		•			•	•
Connecting plug (Euro)			•		•	•		
Art. No. PREMIUM		140.095	142.612	142.643	142.608	142.609	140.098	follows
Art. No. SYSTEM		142.636	142.646	140.096		142.645	142.640	follows

Subject to change without notice  
Connection voltage non-switchable

Additional versions on request

All devices available by August  
except 400 V (Dez)

## Accessories HOTWIND

107.262



Wide slot nozzle, push-fit, 300 x 4 mm  
(Other sizes available)

105.919



Tubular nozzle, push-fit, 456 x 306 x 3 mm  
(Other sizes available)

107.329



Sieve reflector, push-fit, 76 x 75 mm  
(Other sizes available)

106.174



Shell reflector, push-fit, 400 x 65 mm  
(Other sizes available)

107.245



Round nozzle, push-fit, Ø 40 mm  
(Other sizes available)

107.335



Sieve reflector, push-fit, Ø 150 mm  
(Other sizes available)

141.723





Handtool-Kit  
(Handle and protective tube)

106.956



Thermocouple with plug,  
1 m cable

## Installation dimensions in mm

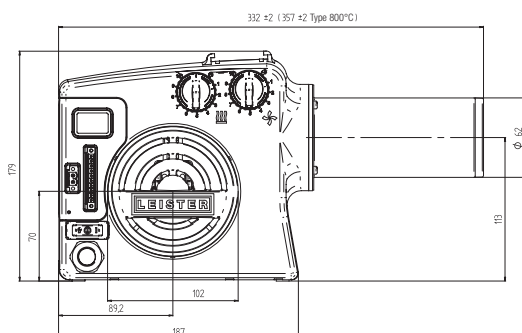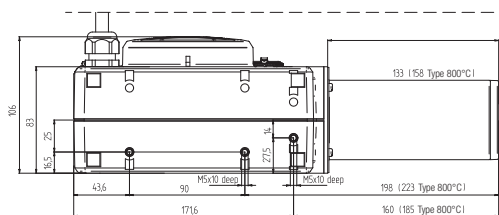

Application as a handheld or table unit  
with handle and protective tube.

## Headquarters:

Leister Process Technologies  
Galileo-Strasse 10  
CH-6056 Kaegiswil/Switzerland  
phone: +41 41 662 74 74  
fax: +41 41 662 74 16  
leister@leister.com  
sales@leister.com

Leister Technologies LLC  
1253 Hamilton Parkway  
Itasca, IL 60143/USA  
phone: +1 630 760 1000  
fax: +1 630 760 1001  
sales@leisterusa.com

Leister Technologies Ltd.  
Building A, 1588 Zhuanxing Road  
Shanghai 201 108 PRC  
phone: +86 21 6442 2398  
fax: +86 21 6442 2338  
leister@leister.cn

Leister Technologis KK  
Shinyokohama Bousei Bldg 1F  
3-12-20, Shinyokohama, Kohoku-ku,  
Yokohama 222-0033  
phone: +81 (45) 477 3637  
fax: +81 (45) 477 3638  
sales-japan@leister.com

Our close worldwide network of more  
than 120 Sales and Service Centres  
in more than 90 countries.

## Europe:

Austria  
Belgium  
Bulgaria  
Croatia  
Cyprus  
Czech Republic

Estonia  
Denmark  
Finland  
France  
Germany  
Great Britain  
Greece

Hungary  
Ireland  
Iceland  
Italy  
Latvia  
Lithuania  
Netherlands

Norway  
Poland  
Portugal  
Romania  
Russia  
Serbia  
Slovakia

Slovenia  
Spain  
Sweden  
Switzerland  
Turkey  
Ukraine

Leister Technologies GmbH  
Aachen, Germany

Leister Process Technologies  
Headquarters and Manufacturing  
Kaegiswil, Switzerland

Leister Technologies LLC  
Itasca, IL, USA

## America:

Canada  
Mexico  
USA  
Argentina  
Brazil  
Chile  
Peru

Leister Technologies KK  
Yokohama, Japan

Leister Technologies Ltd.  
Shanghai, China

## Africa:

Egypt  
Kenya  
Morocco  
South Africa

## Asia:

P. R. China  
Hong Kong  
India  
Indonesia  
Iran

Japan  
Korea  
Malaysia  
Philippines  
Saudi Arabia  
Singapore

United Arab  
Emirates  
Taiwan  
Thailand  
Vietnam

## Oceania:

Australia  
New Zealand

Distributor Address: