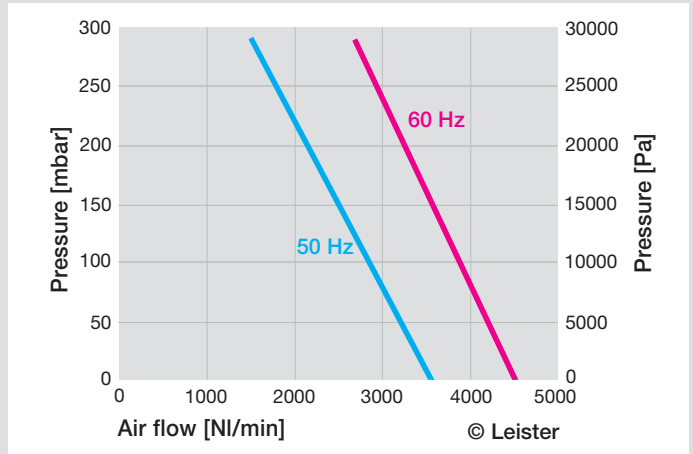


AIRPACK: The full pressure provider.

If high air pressure is required, AIRPACK is the only answer! It is deployable everywhere large volumes of air are transported under high pressure. Its power means it can supply several LEISTER air heaters in parallel. AIRPACK delivers sufficient pressure to efficiently supply Leister blow-off nozzles.

High pressure blower

AIRPACK

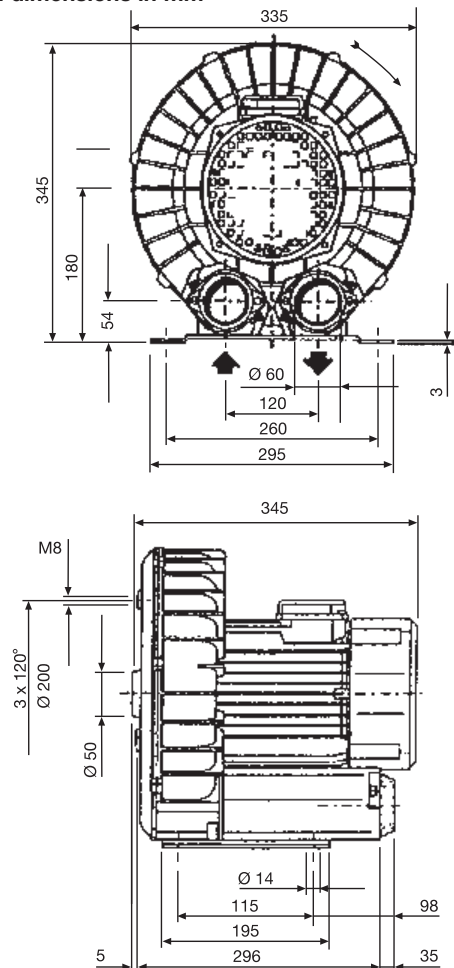


Technical data

Design regenerative blower

Parameter	Unit	50	60
Frequency	Hz	50	60
Air flow (20 °C)	l/min	3500	4500
Static pressure	Pa	29000	29000
Max. ambient temperature	°C	40	40
Noise emission level	LpA (dB)	73	73
Environmental protection (IEC 60529)		IP 54	IP 54
Outside diameter air inlet	mm	∅ 60	∅ 60
Outside diameter air outlet	mm	∅ 60	∅ 60
Weight	kg	25.0	25.0
Mark of conformity		CE	CE
Approval mark		Ⓢ	Ⓢ
Protection classe I		Ⓢ	Ⓢ









Installation dimensions in mm




Voltage	V~ 50Hz	3 × 230 / 400
	60Hz	3 × 440 – 480
Power consumption	W	2200
Without cable	Order no.	119.358

Additional versions on request

Accessories High pressure blower AIRPACK
(Ø 60 mm)

107.287		Hose clip for Ø 38 and Ø 60 mm air hose
107.241		Closing cap Ø 38 mm push-fit on hose connection adaptors 107.292 and 107.293
107.288		PVC air hose, Ø 60 mm
107.240		Closing cap Ø 60 mm, push-fit on hose connection adaptors 107.278
107.291		Hose connection adaptor with 1 air outlet for Ø 38 mm hose. Push-fit on air outlet a = 38 mm, b = 60 mm
107.292		Hose connection adaptor with 2 air outlets for Ø 38 mm hose. Push-fit on air outlet a = 60 mm, b = 38 mm
107.278		Hose connection adaptor, Push-fit on air outlet a = 60 mm, b = 60 mm
110.895		Stainless steel filter push-fit on air intaker

Blow-off nozzles

125.907 125.908		Blow-off nozzle, push-fit Outlet opening adjustable 1 – 5.5 mm a = 300 mm a = 500 mm Connector Ø 60 mm
		> AIRPACK

Special nozzles on request

If using non-Leister blowers, compressors and accessories no guarantee can be given by us