



**Customizable Design**  
Acoustic Finishes


# Echo Treatment



# Fabric Panel

Acoustic fabric panels are sound-absorbing materials designed to enhance acoustic environments by reducing noise and reverberation, making them ideal for spaces such as offices, auditoriums, studios, and home theaters; they have the capacity to absorb up to 90% of incoming sound, effectively improving sound quality and clarity.


Absorption Coefficients, $\alpha$									
Frequency, Hz	63	125	250	500	1K	2K	4K	8K	$\alpha$
Fabric Panel	0.15	0.20	0.8	1.0	1.0	1.0	1.0	0.9	0.95



**Rockwool Infill**



**Timber Frame**



**Chamfered Edge**



**Contact sales representative  
for fabric colour selections**

**Additional: Anti-Termite Spray &  
Fire Rated Coating**



# True Sound

True sound emerges as the result of treatment optimizes sound propagation, employing meticulous acoustic wall allowing every note, word, or sound to treatment. This transformative process be perceived with striking clarity and enhances the auditory experience to precision. The environment becomes a canvas where sound unfolds naturally, an unparalleled level of authenticity. free from interference, resonating with By strategically integrating sound- purity and fidelity. absorbing materials, diffusers, and reflects, the room's resonance is finely tuned, eliminating unwanted echoes and distortions. The acoustic

# Timber Panel

This timber panel, with holes in it, measures 2440mm x 128mm x 15mm thick. It's designed for acoustic purposes. Behind the panel, there's a black tissue and rockwool that helps to absorb the unwanted reflections from the hard surfaces. When sound goes through the holes, the rockwool absorbs the noise, making the place sound clearer.


Absorption Coefficients, $\alpha$									
Frequency, Hz	63	125	250	500	1K	2K	4K	8K	$\alpha$
Timber Panel	0.15	0.15	0.6	0.9	0.9	0.9	0.85	0.85	0.85



Maple



Oak

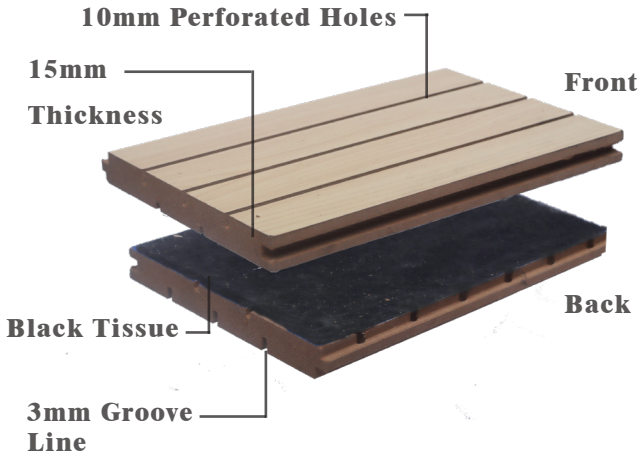



# Aesthetically Pleasing


Acoustic wall finishing is a masterful display of aesthetic harmony. Through a meticulous arrangement of materials, textures, and proportions, it achieves a visual composition that effortlessly marries form and function. The interplay of carefully chosen colors and patterns creates a sense of unity, while the precision in the arrangement of acoustic panels ensures both auditory comfort

and visual satisfaction. This well-designed acoustic wall finishing not only enhances the auditory experience within the space but also captivates the eye with its serene and balanced arrangement, transforming your space into a captivating haven of both sensory delight and acoustic excellence.


# Ceiling Panel

A 15mm/20mm thick acoustic ceiling, suspended using aluminum T-grid hanging rods, serves as an effective solution for spaces requiring acoustic treatment. This setup effectively minimizes noise and echoes, making it a popular choice for environments such as offices, conference rooms, and commercial spaces seeking improved sound quality and comfort.



Absorption Coefficients, $\alpha$									
Frequency, Hz	63	125	250	500	1K	2K	4K	8K	$\alpha$
Classictone	0.87	0.87	0.78	0.78	0.88	0.92	1.0	1.0	0.90
Polytone	0.52	0.52	0.41	0.4	0.77	0.74	0.65	0.65	0.62




**Classictone / 20mm**



**Polytone / 15mm**

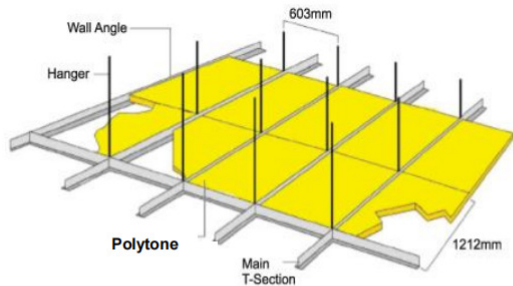



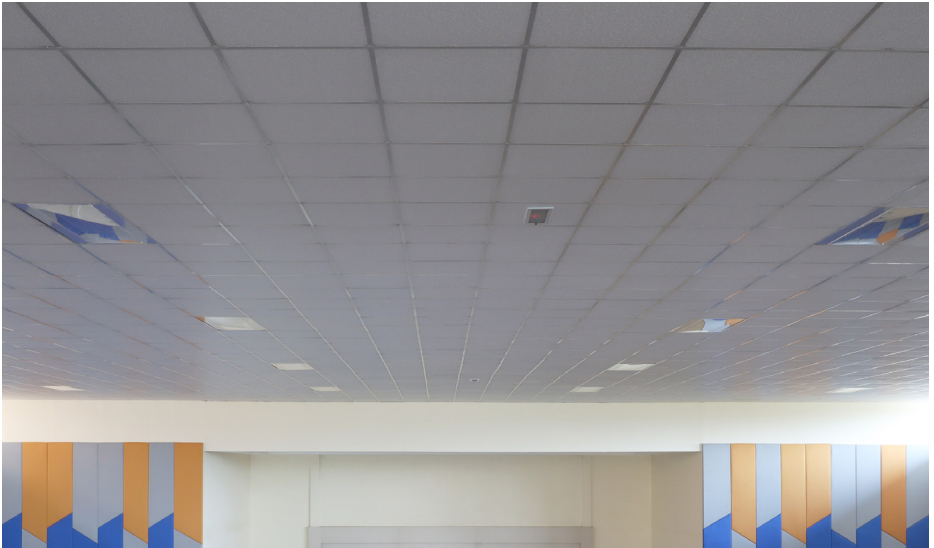

## Cost-effective

Opting for a mineral fiber hanging T-grid ceiling offers a cost-effective solution for enhancing spaces. This approach effectively reduces both noise and expenditure, making it a practical choice for environments that require improved acoustics without overspending.

Maintaining a mineral fiber hanging T-grid ceiling is a breeze due to its convenient sizing options of 2ft x 4ft or 2ft x 2ft. These standardized

dimensions make replacing damaged or stained panels simple and hassle-free. With easy-to-access panels, cleaning, repairs, and upgrades become efficient tasks, reducing downtime and maintenance costs. This user-friendly feature enhances the longevity and overall appeal of the ceiling, making it an attractive choice for spaces that require both cost-effective acoustic solutions and ease of upkeep.

ISTIQ Noise Control Sdn Bhd

(342283-V)

[www.istiq.com.my](http://www.istiq.com.my)

Showroom:

1, Jalan Utarid U5/17, Seksyen U5,  
40150 Shah Alam, Selangor, Malaysia

Tel : +603-7846 5188/5288 Fax: +603-7842 7206

---