

OFF BRAKE

REVERSIBLE MOTOR

6/15w

MEISTER Series

SPEED CONTROL & BRAKE MOTOR

RHKT 1PHASE

■ PERFORMANCE DATA (DUTY : 30 Min.)

Motor Type	Output (W)	Volt. (V)	Freq. (Hz)	Speed Range (rpm)	Rating Torque		Starting		Brake		Condenser	
					1200rpm (gf·cm)	90rpm (gf·cm)	Current (mA)	Torque (kg·cm)	Input (W)	Torque (gf·cm)	(V)	(μF)
RHKT6PF6-10	6	1ø100	50	90~1400	320	310	240	390	6	2000	250	3.0
			60	90~1700	320	310	250	390				
RHKT6PF6-11		1ø110	60	90~1700	320	310	250	390	6	2000	250	3.0
RHKT6PF6-20	6	1ø200	50	90~1400	320	310	120	390	6	2000	450	0.8
			60	90~1700	320	310	130	390				
RHKT6PF6-22		1ø220	60	90~1700	320	310	130	390	6	2000	450	0.8
RHKT6PF6-1U	6	1ø115	60	90~1700	320	310	250	390	6	2000	250	2.3
RHKT6PF6-2C	6	1ø220	50	90~1400	320	310	120	390	6	2000	450	0.7
				50	90~1400	320	310	120				
RHKT7PF15-10	15	1ø100	50	90~1400	1000	470	590	820	6	2000	250	6.0
			60	90~1700	1000	470	520	820				
RHKT7PF15-11		1ø110	60	90~1700	1000	470	520	820	6	2000	250	6.0
RHKT7PF15-20	15	1ø200	50	90~1400	1000	470	300	820	6	2000	450	1.5
			60	90~1700	1000	470	290	820				
RHKT7PF15-22		1ø220	60	90~1700	1000	470	290	820	6	2000	450	1.5
RHKT7PF15-1U	15	1ø115	60	90~1700	1000	470	520	820	6	2000	250	4.0
RHKT7PF15-2C	15	1ø220	50	90~1400	1000	470	300	820	6	2000	450	1.2
				50	90~1400	1000	470	300				

- Motor Type은 감속기 직결용인 피니언축으로 표시하였습니다. STRAIGHT축의 모터를 희망하시면 Motor Type의 PF를 S로 바꾸어 주문하십시오.
- 표시한 모터는 UL 또는 CE규격을 적용한 TP(Thermal Protect) Type입니다.
- For motor with straight shaft, please write S in place of PF in Motor Type.
- Motor Type in green screen represents the motors with TP(Thermal Protect) according to UL or CE regulation.

■ RATED TORQUE OF GEARED MOTOR

- 동일출력의 REVERSIBLE MOTOR와 같습니다.
- Refer to the rated torque of reversible motor.

OUTLINE DIMENSION


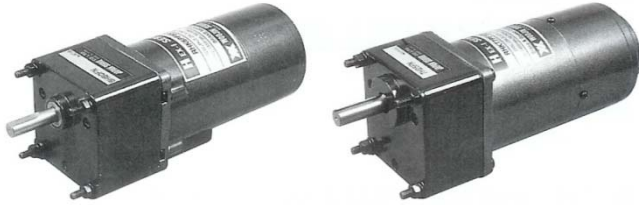



Fig.1 GEARED MOTOR

RHKT6PF6 + 6H□FM(6H□FB) WT 1.3 + 0.4 kg

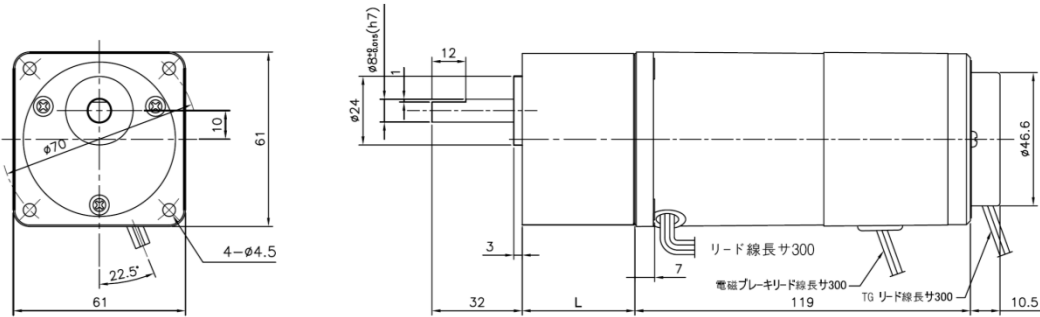


No	L(mm)	減速比	ボルト
01	30	1/3 ~1/18	M4×60
02	40	1/20~1/200	M4×70

RHKT7PF15 + 7H□FM(7H□FB) WT 1.5 + 0.5 kg

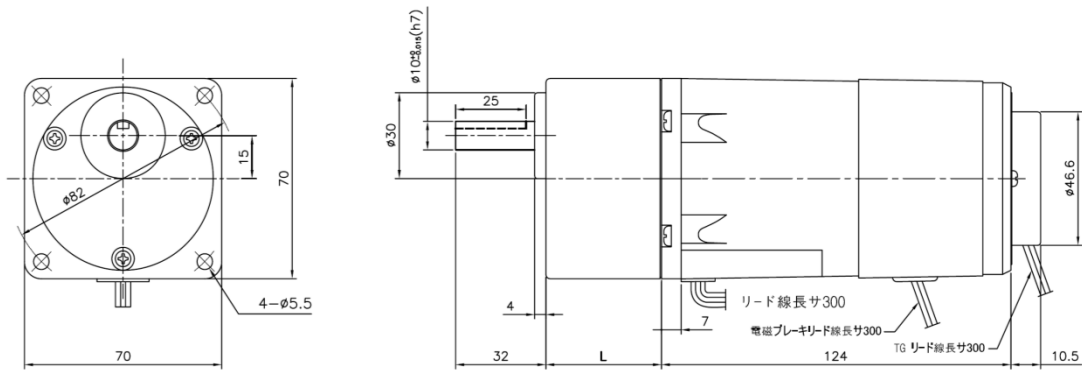

▼ KEY SPEC

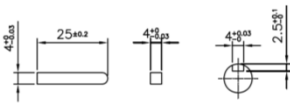

No	L(mm)	減速比	ボルト
01	31	1/3 ~1/18	M5×60
02	41	1/20~1/200	M5×70

SPEED-TORQUE CURVE

- 동일출력의 CONTROL MOTOR와 같습니다.
- For speed-torque characteristics, refer to speed control motor.