
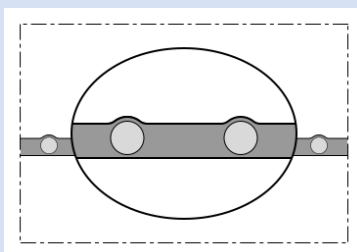


# NORPLAST® PVC 389 NAFTOIL BUNA

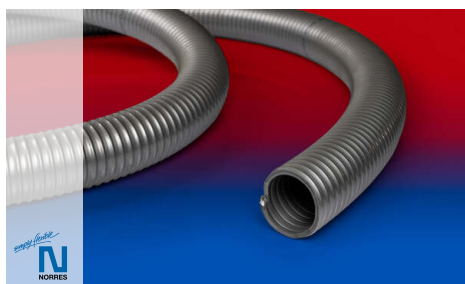

PVC/NBR suction and discharge hose

## Applications

- for industrial water, wastewater, dung and mineral oils
- Widely used in agriculture and horticulture, industrial cleaning, grease separators, oil processing industry, municipal works and sewage treatment

## Properties

- Extremely flexible, especially under low temperature conditions

- according to the norm EN ISO 1307:2008
- Vacuum up to 0.9 bar

## Temperature Range

- -30 °C to 65 °C

## Design

- NBR/PVC inner layer
- NBR/PVC outer layer
- slightly corrugated construction cover
- rigid PVC spiral
- smooth interior

## Delivery variants

- grey inner tube, grey exterior wall, anthracite spiral (standard)

| I.D.        | outer Ø | Vacuum | Operating pressure (20 °C) | Bending Radius | Weight | Dimensions in Stock | Order No.    |
|-------------|---------|--------|----------------------------|----------------|--------|---------------------|--------------|
| (in / mm)   | (mm)    | (bar)  | (bar)                      | (mm)           | (kg/m) | (m)                 |              |
| 1 / 25      | 33.00   | 0,900  | 7,000                      | 75.00          | 0.44   | 50                  | 4465-025-000 |
| 1,25 / 32   | 41.00   | 0,900  | 6,000                      | 96.00          | 0.60   | 50                  | 4465-032-000 |
| 1,5 / 38    | 48.00   | 0,900  | 6,000                      | 114.00         | 0.70   | 50                  | 4465-038-000 |
| 2 / 50-51   | 61.00   | 0,900  | 5,000                      | 153.00         | 1.05   | 50                  | 4465-050-000 |
| 2,5 / 63-65 | 74.00   | 0,900  | 4,500                      | 189.00         | 1.25   | 50                  | 4465-063-000 |
| 3 / 75-76   | 88.00   | 0,900  | 4,000                      | 228.00         | 1.60   | 50                  | 4465-075-000 |
| - / 80      | 92.00   | 0,900  | 3,000                      | 240.00         | 1.70   | 50                  | 4465-080-000 |
| 3,5 / 89-90 | 104.00  | 0,900  | 3,000                      | 270.00         | 2.20   | 50                  | 4465-090-000 |
| 4 / 100-102 | 116.00  | 0,900  | 3,000                      | 306.00         | 2.40   | 50                  | 4465-100-000 |
| 5 / 125-127 | 143.00  | 0,900  | 2,000                      | 381.00         | 3.30   | 20                  | 4465-125-000 |
| 6 / 150-152 | 169.00  | 0,900  | 2,000                      | 456.00         | 4.20   | 20                  | 4465-150-000 |

## Accessories



CLAMP 211

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20 °C and are approx. data. Additional information at [www.norres.com/en/technology/](http://www.norres.com/en/technology/).