



www.cooled.com.tw



# LED Floodlight

APPLICATIONS:

Billboard, Landscape, Outdoor Lighting etc.







# LED Floodlight

Model : F3040 / F3080 / F3150 / F3250



| Part No.     | F3040                     |         | F3080                         |         | F3150                        |          | F3250                        |          |
|--------------|---------------------------|---------|-------------------------------|---------|------------------------------|----------|------------------------------|----------|
| Wattage      | 33W                       |         | 62.4W                         |         | 134W                         |          | 207W                         |          |
| Input Power  | 100-240VAC 50/60Hz        |         | 100-240VAC 50/60Hz            |         | 100-277VAC 50/60Hz           |          | 100-277VAC 50/60Hz           |          |
| Power Factor | >0.9                      |         | >0.9                          |         | >0.9                         |          | >0.9                         |          |
| CRI          | ≥80                       |         | ≥80                           |         | ≥80                          |          | ≥80                          |          |
| Color Temp.  | 5000K                     | 3000K   | 5000K                         | 3000K   | 5000K                        | 3000K    | 5000K                        | 3000K    |
| Lumens       | 4051 lm                   | 3768 lm | 8130 lm                       | 7561 lm | 15087 lm                     | 14031 lm | 25071 lm                     | 23316 lm |
| Angle        | 110                       |         | 110                           |         | 110                          |          | 110                          |          |
| Dimension    | 203mm x 176.4mm x 63.77mm |         | 281.63mm x 220.3mm x 112.77mm |         | 309.5mm x 267.5mm x 182.23mm |          | 364.5mm x 298.2mm x 186.73mm |          |
| Weight       | 1260g±5%                  |         | 2930g±5%                      |         | 5300g±5%                     |          | 6850g±5%                     |          |

\*Diagram for illumination distance(Cool White)

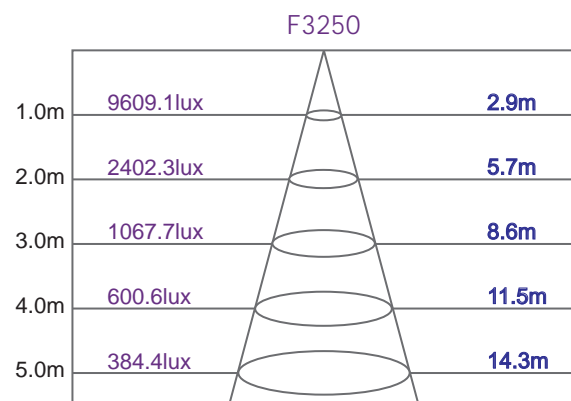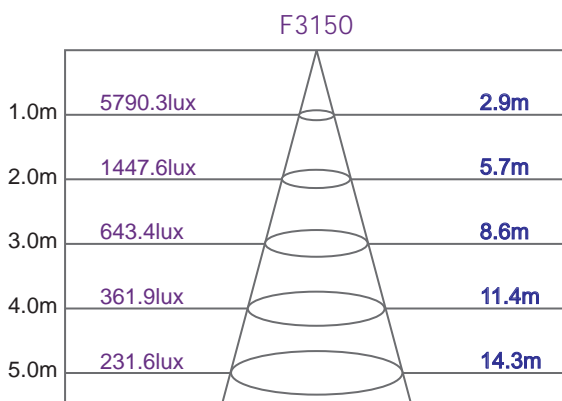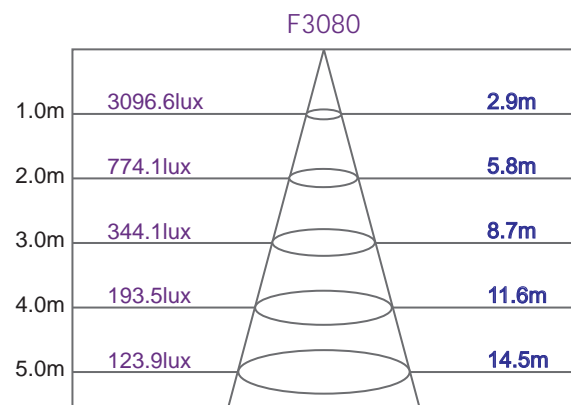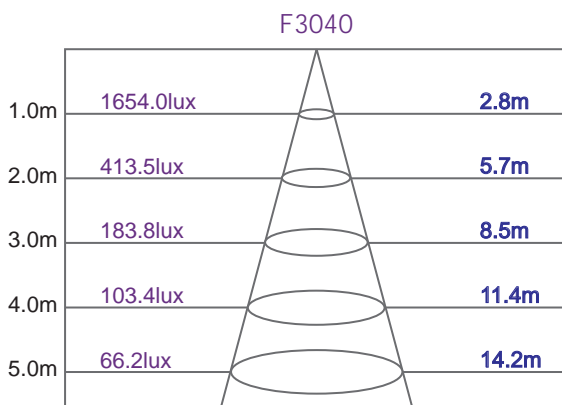

Note: \*Product specifications are for reference only.

\*We reserve the right to change specifications without notice.