
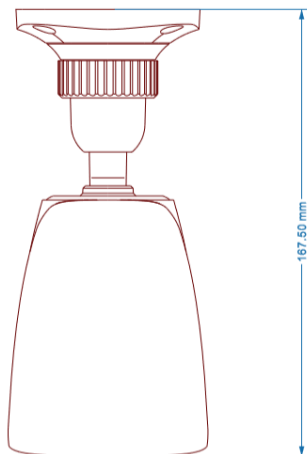


## CNC-3832 – 8MP H.265+ WDR IR IP Bullet Camera

### Features

- **8 Megapixel** 3840x2160 @20fps
- **H.265+** Compression
- 3.6mm Fixed Lens
- **WDR**, BLC, HLC, 3D-DNR, **ROI**
- 4 Users simultaneous login
- LED Array, 0 Lux up to 20m
- Support μSD up to 128G
- IP67 Aluminum Casing
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing, Area Intrusion, Object Removal, Face Recognition, People Counting, Human Detection etc**

### SPECIFICATION



Model	CNC-3832
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	8MP 3840x2160 @20fps
Shuttle	1/25s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	2nos IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m
Audio	Mic. In x1
Network	10/100-BaseT, RJ45
Bit Rate	128Kbps ~ 6Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af/at or 12VDC, <5W
Dimension	74.5 x 74.5 x 167.5mm(L), 0.39kg

\* Specification may be changed without prior notice