

About Vinyl Tile

Vinyl Wood Tile maintains the original color and features even though surface is worn because it used a highly abrasion-resistant material especially.

• Material	Advanced Generation Homogeneous Printed
• Type	Pattern basic
• Size	200mm x 1,000mm
• Pile	3mm(±0.1mm)
• Packing	1box * 16pcs (35sf)
• Mat usage	House, School, Restaurant, Church, Coffee Shop, Exhibition Place, Office, Building & Commercial Facility, Educational facility, Hospital, Public facility

© Diagram of Products structure



※ Environment-friendly, Sound absorption, Design of various, Nice residential

Vinyl Tiles are layered with special PVC clear Sheet which protects the surface from damage, Photogravure sheets for advanced natural-wood or abstract-pattern surfaces and specially compounded PVC Core Sheet and PVC Balance Sheet. It has elegant natural patterns and colors, high durability and dimensional stability. So it's easy to install and especially suitable for elegant places.

Installation

1. Caution before construction

- Measure moisture with moisture measuring instruments, the result must be under the standard amount. When using, simplicity measuring apparatus, put transparent vinyl and judge how the water will drop after 24 hours and then install it.
- Because the part of prominence and depression / mortar dust obstructs adhesive strength, surely get rid of them.
- The product must be installed in the same Lot.

2. Caution when using adhesive

- Change air filter for worker's health obstacle and fire, when using a solvent adhesive.
- Please use only designated adhesive.

Varies	Packing Unit	Coverage
Polyurethane	4kg / can 20kg / can	New construction spot Epoxy floor, Sauna floor, the place that is warmed up by heater The place that is moped periodically and large building Winter time, The place that is a little humid (5~8%)
Acrylic	10kg / can	The place except application of dominance adhesive.

- The quantity of adhesive application must follow standard amount of (1.0 ~ 1.5kg / a land measure of six square check) because it will affect the adhesive strength.
- After the adhesion of the floor, press down the edge of floor with hand foot and after installation push down the whole area with roller of 50kg in order to prevent curling up.

3. Caution after construction

- Lay a protection mat to protect the surface after installation.
- A working is possible after 24 hours on the floor, but moves away house goods and do not turn on the heater because it takes 72 hours for hardening of the oil adhesive.
- Adhesive products may have particular smell after the beginning of the installation, so please keep the air clean, by opening the window.

4. Caution after Caution for Maintenance

- If the surface become polluted, get remove it with alcohol. Do not use a thinner product or acetone.
- Depending on the condition and the use of floor, remove the pollution using a damp cloth with a neutral detergent and please maintain the floor with wax coating.
- To avoid damage, do not wipe with a damp cloth in any case, because it may result in curling up and moisture will infiltrate into the edge / connection part of a floor.
- This product may cause discoloration when contacted with other chemical.

Product Listing



FC 01



FC 02



FC 03



FC 04



FC 05



FC 06



FC 11



FC 12



FC 13



FC 14



FC 15



FC 21



FC 23



FC 25



FC 1212



FC 1214



FC 2115




FC 2116



FC 2117



FC 2426

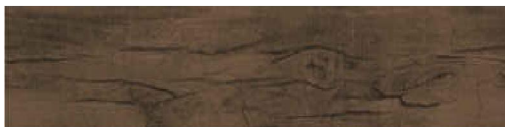

FC 3132



FC 5651



FC 5653



FC 5655



FC 5657



FC 7172