



CE DIBT



けっさく

M U
J I

SPC FLOORING
6mm

THE THICKER THE STRONGER



Commercial
Facilities



Laundry
room



Restaurant



Educational
Facilities




Kitchen

VIRGIN SPC series

MOKU もくざい SERIES

6mm x 182mm x 1220mm
4mm x 182mm x 1220mm

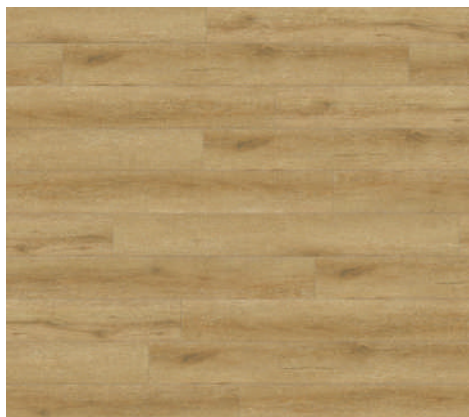

MO-445-3

6mm & 4mm



MO-655-1

6mm & 4mm



MO-655-5

6mm & 4mm

MOKU もくざい SERIES

6mm x 182mm x 1220mm
4mm x 182mm x 1220mm




MO-655-21

6mm & 4mm



MO-889141-5

6mm Only

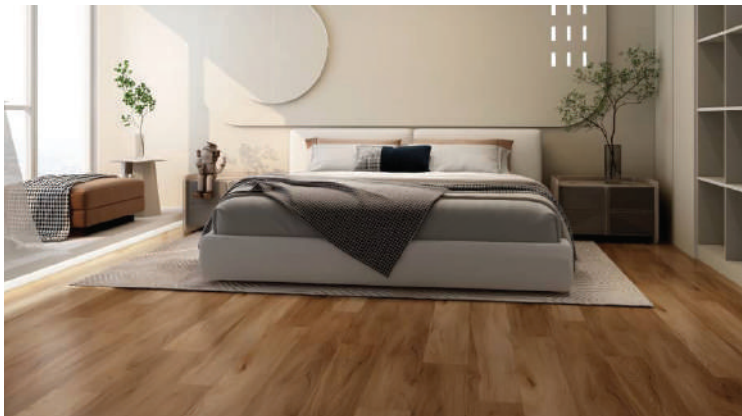

MO 86402L-04

6mm Only

ROCKU いし SERIES

6mm x 182mm x 1220mm



RO-1039-1

6mm Only



MO-655-1




MO-445-3

Flooring details

Item	Form	Size (mm)	Backing layer	Weight/box (kg)	Quantity/box (pcs)	Total area/box (sqft)
MOKU もくざい SERIES (Wood Pattern)		4mm (T) x 182mm (W) x 1220mm (L)	N/A	18.65 kg	10 pcs	24 sqft
		5mm (T) x 182mm (W) x 1220mm(L)			8 pcs	19.12 sqft
ROCKU いし SERIES (Stone Pattern)		5mm (T) x 610mm (W) x 305mm(L)	IXPE FOAM 1mm	19.54 kg	10 pcs	20.03 sqft

Structure of SPC flooring

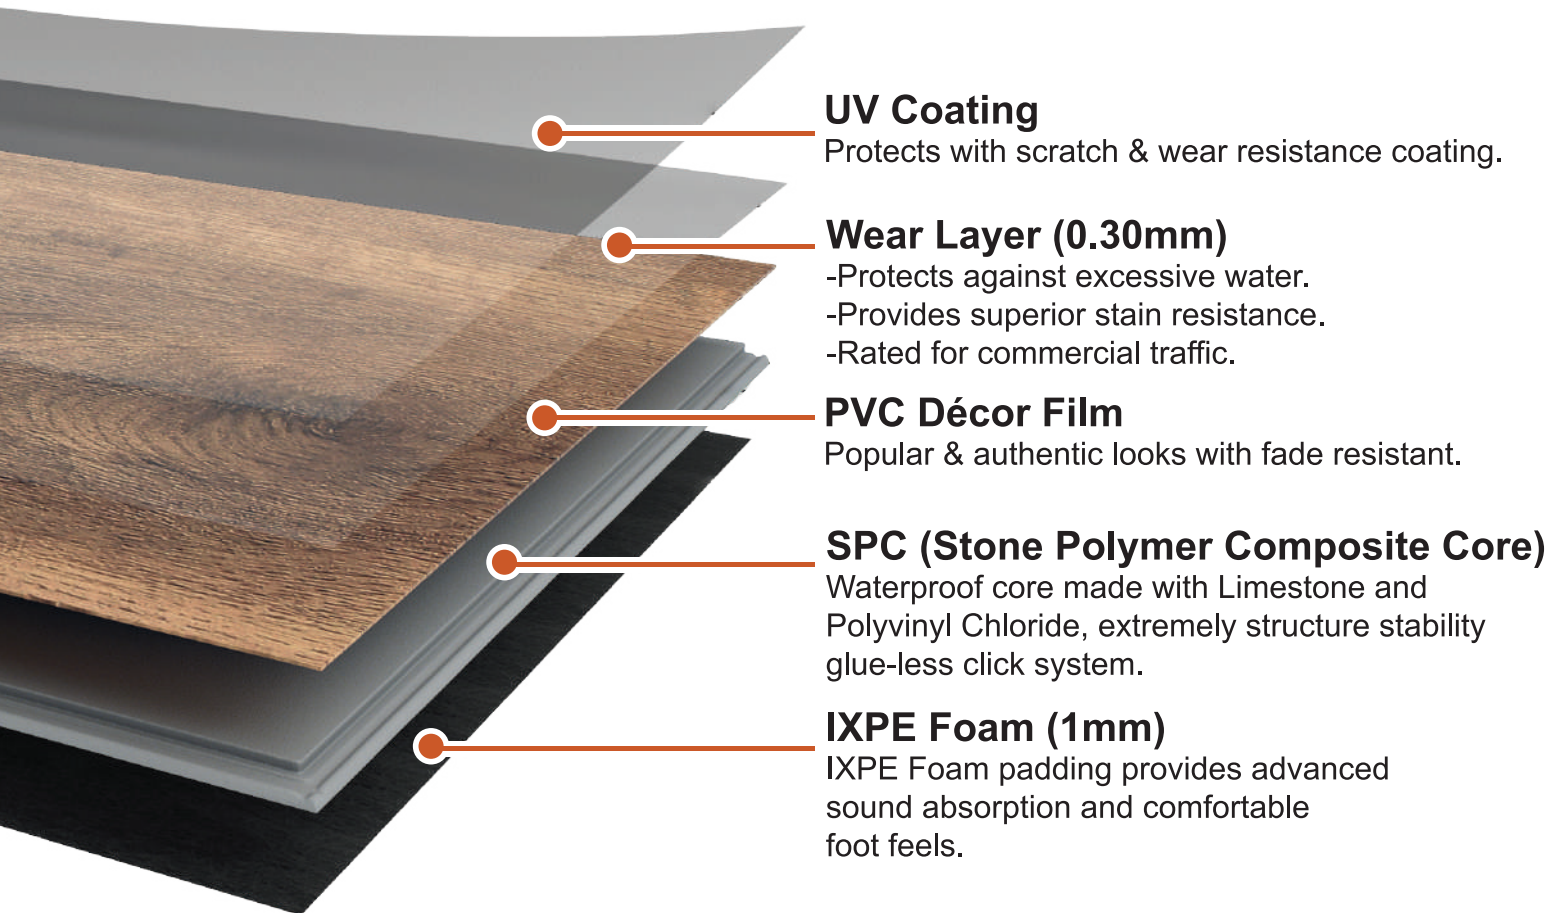

Advantages of SPC flooring



Comfortable



Value for Money



Easy-installation



Slip-resistance



Formaldehydeless







Variety of colours



MO-655-5

SPC FLOORING TECHNICAL INFORMATION

CHARACTERISTICS		STANDARDS	RESULT
	Dimension (mm)		Moku もくざい: 1220mm x 182mm
			Rocku いし: 610mm x 305mm
	Thickness in total (mm)	4mm/5mm/6mm/7mm	4mm & 6mm (With IXPE)
	Thickness of IXPE Foam (mm)	1mm/1.5mm/2mm	1mm
	Thickness of wear layer (mm)	0.1mm/0.12mm/0.2mm/0.3mm	0.3mm
	Phthalate tests (DBP/BBP/DEHP/DINP/ DNOP/DIDP)	EN 14372:2004	Free
	Dimension stability	ASTM F2199-09 (R2014)	Manufacturing direction: -0.089%
			Across-manufacturing direction: -0.015%
	Seam strength	EN 684:1995	Ave. : 360N/50mm
			Min. : 330N/50mm
	Residual indentation (%)	ASTM F1700-13a	0.4
		ASTM F1914-07 (2011)	
	Resistance to chemicals	ASTM F1700-13a	No change in surface dulling, surface attack, or staining was detected
		ASTM F925-13	
	Heat stability	ASTM F1514-03 (R2013)	$\Delta E^*_{ab}=0.67$
	Static loading	ASTM F970-17	0.04mm
	Soluble heavy metal contents test	ASTM F963-16 (Clause 8.3)	Free
	Large ball impact resistance	NALFA/ANSI LF-01-2011	No cracks or fractures occurred at the height of 2500mm